

# Acceleration sensors

With SIL2/PLd relay output for limit monitoring

Analog / CANopen®

## GAM900S



GAM900S

### Technical data - electrical ratings

|  |   |
|--|---|
| Voltage supply                         | 10...30 VDC   |
| Reverse polarity protection            | Yes   |
| Consumption w/o load                   | ≤200 mA (24 VDC)  |
| Initializing time                      | ≤2000 ms after power on   |
| Interfaces                             | CANopen®, Analog 4...20 mA (0...10 V optional)  |
| Frequency bands                        | 4 (configurable)  |
| Measuring range                        | ±2 g  |
| Resolution                             | <4 mg   |
| Accuracy 3σ (with band pass filtering) | =60 mg (in the range of ±1000 mg)<br>=15 mg (in the range of ±250 mg)   |
| Interference immunity                  | DIN EN 61000-6-2<br>EN 61326-3-1  |
| Emitted interference                   | DIN EN 61000-6-4  |
| Status indicator                       | DUO-LED integrated in housing   |
| Approvals                              | UL approval / E63076,<br>PLd according to<br>EN ISO 13849-1:2008+AC:2009<br>SIL CL2 according to<br>EN 62061:2005 +AC:2010<br>+A1:2013<br>SIL2 according to<br>IEC 61508-1..7:2010,<br>Certified by TÜV Rheinland |

### Features

- Acceleration sensor for safety applications
- Safety limit monitoring with relay output according to SIL2/PLd
- Output of acceleration information via analog / CANopen®
- Redundante 3 axes detection, MEMS based
- Measuring range ±2 g
- Connection: connector M12, 12-pin
- Offshore capability (plastic housing)

### Technical data - mechanical design

|                         |  |
|-------------------------|--|
| Dimensions W x H x L    | 55 x 30 x 90 mm  |
| Protection DIN EN 60529 | IP 67  |
| Materials               | GAM900S-M: Aluminium<br>GAM900S-P: glass-fiber reinforced plastic                        |
| Operating temperature   | -40...+75 °C   |
| Resistance              | DIN EN 60068-2-6<br>Vibration 20 g, 60-2000 Hz<br>DIN EN 60068-2-27<br>Shock 100 g, 6 ms |
| Weight approx.          | 200 g (plastic),<br>250 g (Aluminium)  |
| Connection              | Connector M12, 12-pin  |

### Safety-relevant key characteristics

|   |                |
|---|----------------|
| Performance Level (ISO 13849)                 | PLd            |
| Category (ISO 13849)                          | 3              |
| MTTF <sub>d</sub> (ISO 13849)                 | 393 years      |
| DC <sub>avg</sub> (ISO 13849)                 | 86 %           |
| TM (service life, ISO 13849)                  | 20 years       |
| Safety Integrity Level (IEC 61508 / EN 62061) | SIL2 / SIL CL2 |
| PFH <sub>D</sub> (IEC 61508 / EN 62061)       | 2,5 E-09 1/h   |
| PFD <sub>avg</sub> (IEC 61508)                | 2,1 E-04       |
| Error reaction time                           | <50 ms         |

# Acceleration sensors

## With SIL2/PLd relay output for limit monitoring

### Analog / CANopen®

**GAM900S**

#### Part number

GAM900S- 

|  |   |    |   |  |  |      |     |  |
|--|---|----|---|--|--|------|-----|--|
|  | 3 | 2G | . |  |  | .ACB | ... |  |
|--|---|----|---|--|--|------|-----|--|

#### Option terminal assignment

- No options
- /3500 Voltage supply and redundant safety relay at connector 2
- /3501 Redundant safety relay at connector 2
- /3502 Voltage supply at connector 2

#### Relay trigger threshold

- ... Encoding value 05...99 at choice
- Trigger threshold = encoding value x 10 mg
- (e.g. 80 mg = 08 x 10 mg)
- Encoding value 00: at ≥2 different switching threshold

#### Voltage supply / interface

- CC 10...30 VDC / CANopen® and analog (4...20 mA)
- VC 10...30 VDC / CANopen® and analog (0...+10 V)\*

#### Connection / Output

- J 1 x M12 connector, 12-pin / 1 x relay
- 2 2 x M12 connector, 12-pin / 4 x relay

#### Measuring range

2G ±2 g

#### Number of axes

3 Three axes

#### Housing material

- M Aluminium
- P Glass-fiber reinforced plastic

\* On request

#### Accessories

##### Connectors and cables

|          |   |
|----------|---|
| 11142900 | Female connector M12, 12-pin, 1 m cable<br>(Z 201.M01)  |
| 11138627 | Female connector M12, 12-pin, 5 m cable<br>(Z 201.M05)  |
| 11142902 | Female connector M12, 12-pin, 10 m cable<br>(Z 201.M10) |

Note: Accessories are not SIL2 approved. The user has to ensure the secure transfer and analysis of the signal.

# Acceleration sensors

With SIL2/PLd relay output for limit monitoring

Analog / CANopen®

## GAM900S

### Terminal assignment

#### Connector 1, connector M12, 12-pin



a) Standard Description

|        |                              |
|--------|------------------------------|
| Pin 1  | GND                          |
| Pin 2  | Test input                   |
| Pin 3  | UB                           |
| Pin 4  | Analog ground                |
| Pin 5  | Analog output X              |
| Pin 6  | Analog output Y              |
| Pin 7  | Relay 1 / Safety contact NO* |
| Pin 8  | CAN Ground                   |
| Pin 9  | Relay 1 / Safety contact CO* |
| Pin 10 | n.c.                         |
| Pin 11 | CAN Low                      |
| Pin 12 | CAN High                     |



#### Connector 2, connector M12, 12-pin

a) Standard Description

|        |                       |
|--------|-----------------------|
| Pin 1  | Relay 2 / contact CO* |
| Pin 2  | Relay 3 / contact NO* |
| Pin 3  | Relay 3 / contact CO* |
| Pin 4  | Relay 3 / contact NC* |
| Pin 5  | Relay 4 / contact NO* |
| Pin 6  | Relay 4 / contact CO* |
| Pin 7  | Relay 4 / contact NC* |
| Pin 8  | CAN Ground            |
| Pin 9  | Relay 2 / contact NO* |
| Pin 10 | Relay 2 / contact NC* |
| Pin 11 | CAN Low               |
| Pin 12 | CAN High              |



Connector 1



Connector 1

Connector 2

#### b) Option -3500 same as a) Standard, but:

Connector 1

|        |                       |
|--------|-----------------------|
| Pin 10 | Relay 1 / contact NC* |
|--------|-----------------------|

Connector 2

|       |                              |
|-------|------------------------------|
| Pin 2 | Relay 1a / Safety contact NO |
| Pin 3 | Relay 1a / Safety contact CO |
| Pin 4 | Relay 1a / contact NC        |
| Pin 5 | n.c.                         |
| Pin 6 | GND                          |
| Pin 7 | UB                           |

#### c) Option -3501 same as a) Standard, but:

Connector 1

|        |                       |
|--------|-----------------------|
| Pin 10 | Relay 1 / contact NC* |
|--------|-----------------------|

Connector 2

|       |                              |
|-------|------------------------------|
| Pin 2 | Relay 1a / Safety contact NO |
| Pin 3 | Relay 1a / Safety contact CO |
| Pin 4 | Relay 1a / contact NC        |

#### d) Option -3502 same as a) Standard, but:

Connector 2

|       |      |
|-------|------|
| Pin 5 | n.c. |
| Pin 6 | GND  |
| Pin 7 | UB   |

\* Customer-specific relay configuration on request

# Acceleration sensors

With SIL2/PLd relay output for limit monitoring

Analog / CANopen®


**GAM900S**

## Configuration profile

| Band               | Analog 1<br>CANopen 1 | Analog 2<br>CANopen 2 | CANopen 3    | CANopen 4    |
|--------------------|-----------------------|-----------------------|--------------|--------------|
| Direction          | X                     | Y                     | Z            | X,Y          |
| Range Analog       | ±0.5 g                | ±0.5 g                | –            | –            |
| Range CANopen      | ±2 g                  | ±2 g                  | ±2 g         | ±2 g         |
| Resolution Analog  | 0.244 mg              | 0.244 mg              | –            | –            |
| Resolution CANopen | 1 mg                  | 1 mg                  | 1 mg         | 1 mg         |
| Filter type        | Bandpass              | Bandpass              | Bandpass     | Bandpass     |
| Filter order       | 4                     | 4                     | 4            | 4            |
| Bandwidth          | 0.05...25 Hz          | 0.05...25 Hz          | 0.05...25 Hz | 0.05...25 Hz |
| Relay ID           | 2                     | 2                     | –            | 1 (safety)   |
| Relay attack value | see part no.          | see part no.          | –            | see part no. |
| Relay attack time  | 0 s                   | 0 s                   | –            | 0 s          |
| Relay decay value  | 100 %                 | 100 %                 | –            | 100 %        |
| Relay decay time   | 1 s                   | 1 s                   | –            | 1 s          |

Different configurations on request.

## Installation position

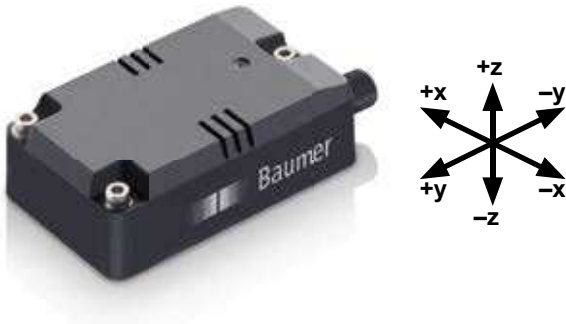

# Acceleration sensors


With SIL2/PLd relay output for limit monitoring

Analog / CANopen®


## GAM900S

### Dimensions


#### GAM900S - plastic housing, 1x connector M12

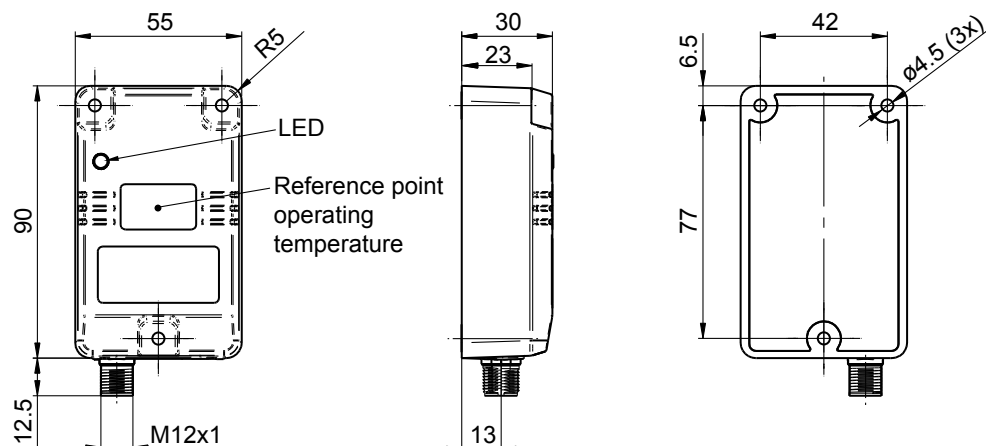

#### GAM900S - plastic housing, 2x connector M12

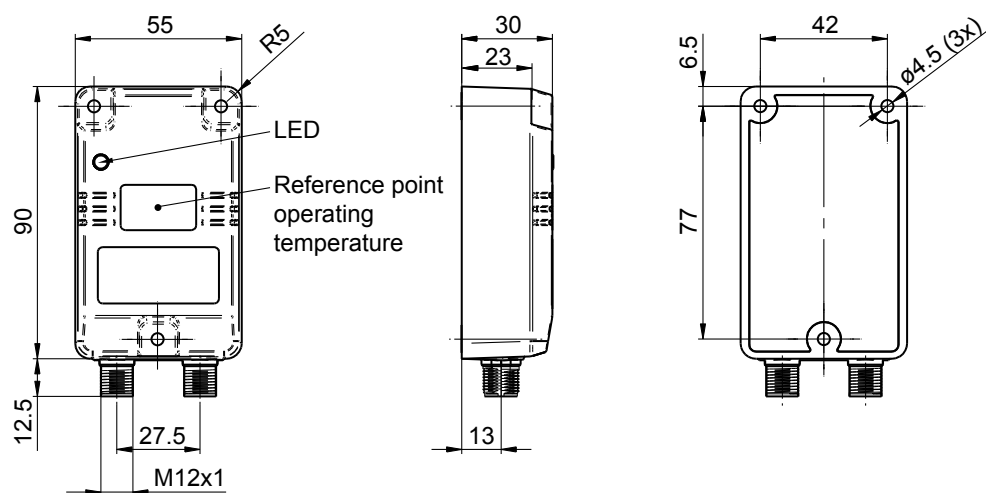

#### GAM900S - aluminium housing, 1x connector M12

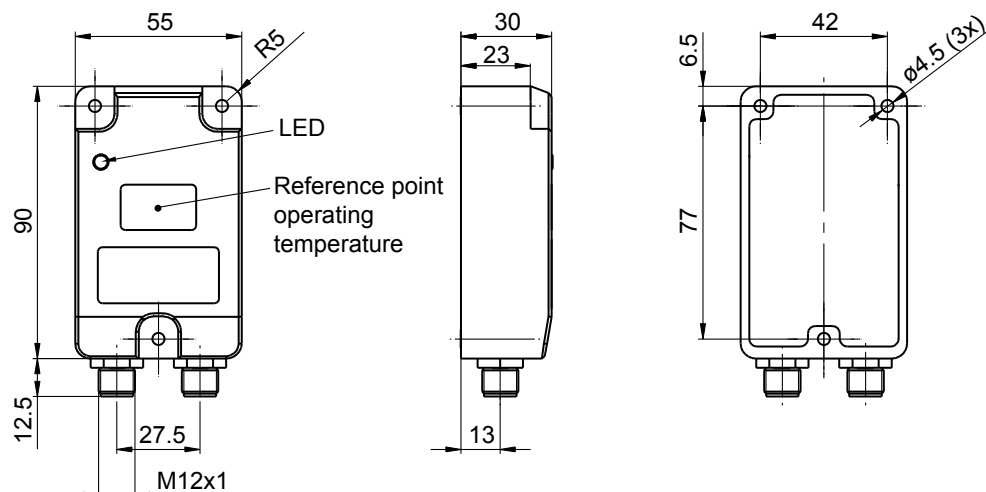

# Acceleration sensors

With SIL2/PLd relay output for limit monitoring  
Analog / CANopen®

**GAM900S**

## Dimensions

**GAM900S - aluminium housing, 2x connector M12**

