

Presentation in the deactivated condition:
Key inserted; Actuator removed

STS-System Benefits

- EU-Test certificate according to the directive 2006/42/EG, annex IX
- For safety applications up to PLe/Category 4 according to EN/ISO 13849-1
- Modular and expandable system
- Rugged stainless steel design
- Combines the benefits of safety switch, solenoid locking and key transfer in a single system
- Easy installation through comprehensive accessories
- Protection against lock-in
- Coding level low, medium, high according to DIN EN ISO 14119:2014-03

Features

The units are particularly suitable for applications with:

- Partial body access (no lock-in danger)
- Extremely rugged ambient conditions
- Required feed back signal of the key or actuator
- Required access rights

Approvals and Marking



Function

Mechanical solenoid locking for separating guards with forced key entry as well as electrical monitoring function.

Application

To secure separating guards such as safety gates and hoods in machine and plant engineering.

Design and Function

Attention!



Hazards must be ruled out before the movable part of the guard can then be opened! and the dangerous location can be reached!

The solenoid locking unit is to be integrated into a system and connected with a control unit so that the hazardous machine can run only when the guard is locked and closed.

After entering a first key into key module the actuator can be removed from actuator module and the access can be opened.

The key is blocked after removing the actuator. Only after the access is locked and the actuator was returned to its starting position can the first key be removed again and the solenoid locking is activated.

RX10A and RXK01M are used in the system in connection with additional STS units and / or SAFEMASTER products. The key to be entered may originate from these units (e.g. release through upstream solenoid locking ZRH01A in connection with a speed monitor UH 5947 or standstill monitor LH 5946). On the base unit RX10A the key can be assigned to a person with access rights.

The difference between RX10A and RXK01M is that on RX10A the key position is electrically monitored and on RXK01M the actuator position.

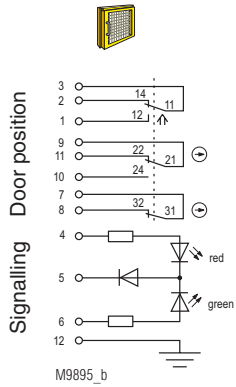


Fig. 1:
Locked while activated:
Actuator inserted,
Key removed,
Door closed

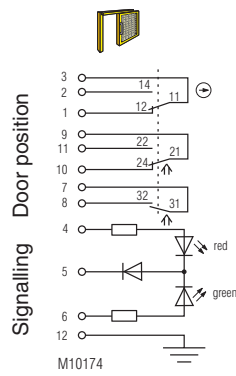


Fig. 2:
Lock deactivated:
Key inserted,
Actuator removed,
Door open


Switching logic

			Fig. 1	Fig. 2
Door contacts	3	2		
	3	1		
	9	11		
	9	10		
	7	8		


closed
 open

Enclosure:	Stainless steel V4A / AISI 316L / AISI 630
Degree of protection:	IP 65
Temperature range:	- 25 °C to + 65 °C
Storage temperature:	- 40 °C to + 80 °C
Mechanical principle:	Rotating axis with redundant actuator
Connection method:	cage tension spring clamps
min. connection cross-section:	0.25 mm ²
max. connection cross-section:	0.75 mm ²
Cable entry:	1 x M20 x 1.5
B10:	2 x 10 ⁶ switching cycles
Electrical service life:	5 x 10 ⁶ switching cycles
Locking force:	min. 4000 N
min. operating speed:	100 mm/s
max. operating speed:	500 mm/s
max. switching frequency:	360/h
Power supply	„class 2“ in accordance to UL508 table 32
Nominal voltage U _N :	AC/DC 24 V
Nominal voltage range:	0.85 ... 1.1 U _N (at 23 °C ambient temperature)
Power consumption:	0.3 W
Rated impulse voltage:	0.8 kV
Rated insulation voltage:	≤ 50 V
Contacts:	1 NC contact, 2 antivalent changeovers contacts
Switching principle:	Changeover contact with forced-opening snap-action switch
max. operating current:	2 A
Short circuit strength, max. fusing:	2 A gG
Utilization category of switching elements to AC 15:	1 A
to DC 13:	0.5 A
Rated conditional short circuit current:	1000 A
Contact material:	Ag / AgSnO ₂
Indicator	LED red/green, separate selection possible
Test principles:	EN ISO 13849-1:2008 DIN EN ISO 14119:2014-03 EN 60947-5-1:2005 GS-ET-15:02.2011 GS-ET-19:02-2011 GS-ET-31:02-2010
Intended use:	up to max. cat. 4, PL e according to EN ISO 13849-1
Mounting:	according to DIN EN 50041
Contact elements:	IEC EN 60947-5-1 Appendix K
Additional requirement for cat. 4 structure (as single unit):	Add 2nd actuator module, Type SXBA
Diagnostic coverage (DC), (mechanical):	
Logic and output	cat. 2 cat. 3 cat. 4
RX10A:	90 % 90 %
RXK01M:	90 % 90 %
RX10BA:	90 % 90 % 99 %
RXKK01M:	90 % 90 % 99 %
Protection against faults of common cause:	see table in STS design guide
Repair and replacement:	by manufacturer only
Test intervals:	
for PL a to d:	min. once a year
for PL e:	min. once a month

Ordering Example

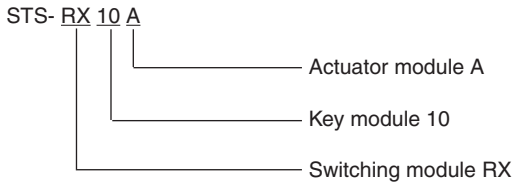

Ordering Example

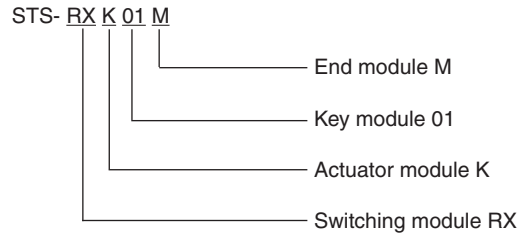

Variants and Combination Options

Because of their modular design the basic units of the SAFEMASTER STS System can be combined and expanded according to customer requests. This allows for a variety of possible units and functions.

Overview of the basic units

Functions	Safety switches design type 2	Safety switches design type 2 with solenoid lock	Mechanical units design type 2	Mechanical units with electrical monitoring	Mechanical units with electrical release
Units with standard function	SXA	ZRHA	M10A	RX10A RXK01M	YRXKM YRXK01M
Units with mechanical lock and forced key extraction	SX01A	ZRH01A	M11A	RX11A RXK11M	YRX10A YRX11A
Units with optional key extraction	SXB01M	ZRHB01M	M10B01M	RX10B01M RX10K01M	YRX10B01M
Units without actuator	SX01M	ZRH01M	M12M	RX11M	YRX11M


For additional information refer to the data sheets of the individual modules and other basic units.

Data sheets

Switching module RX
Key module 01/10
Actuator module A
Actuator module K
End module M




Take advantage of the advice of the **E. DOLD & SÖHNE KG** specialists regarding the choice of units and combination of a system.

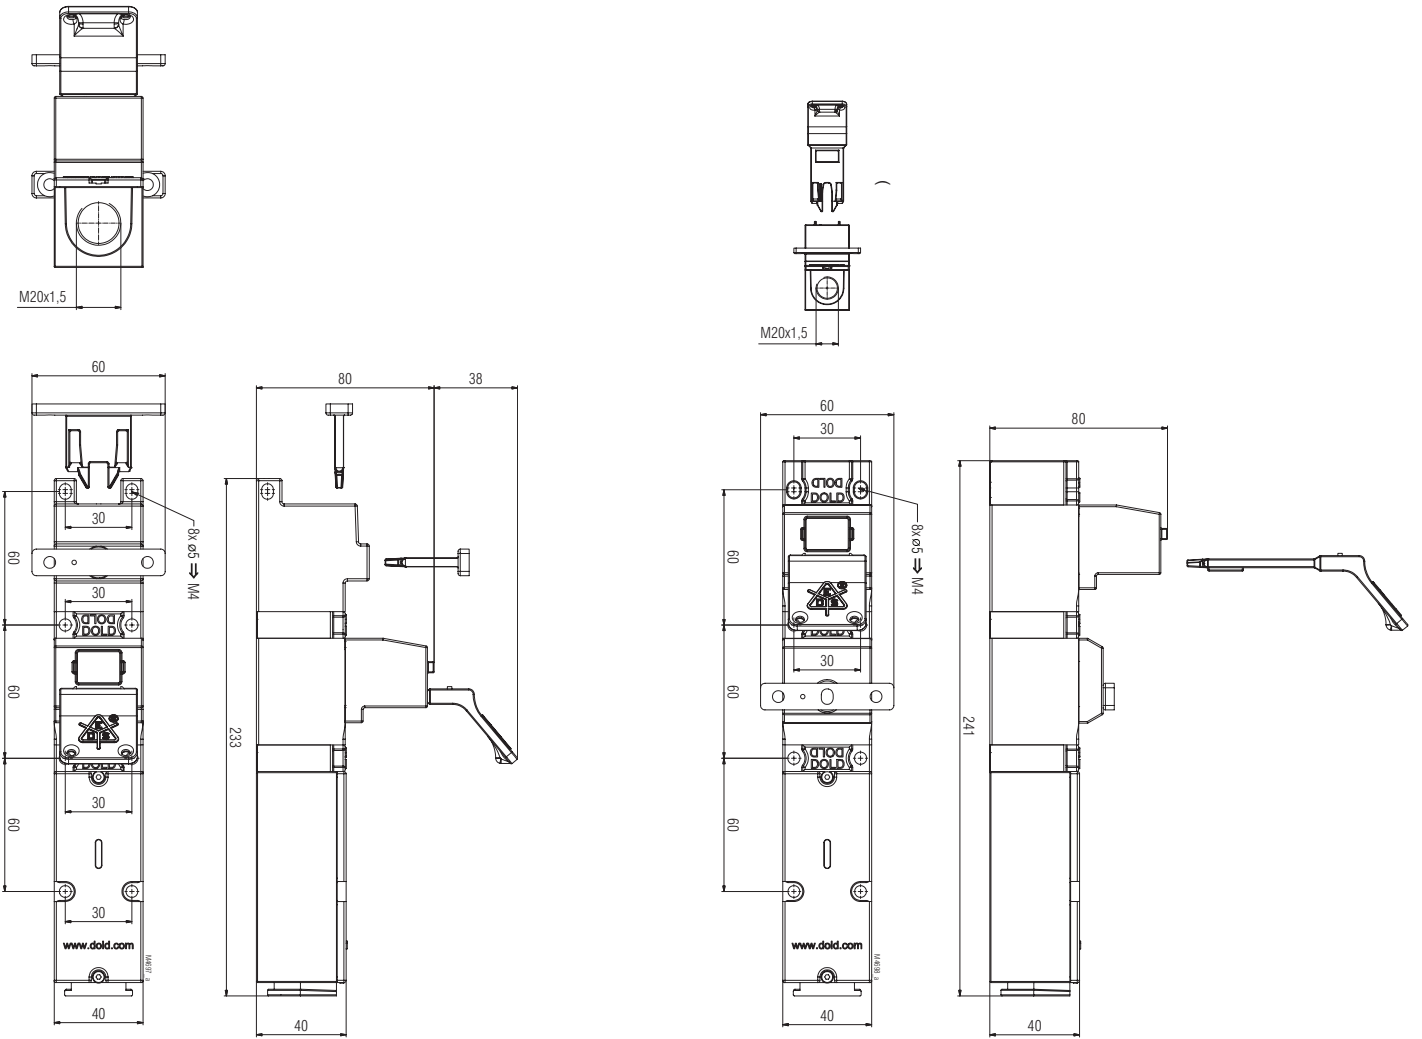


RX10A
Clearance tolerances $\pm 2\%$

RXK01M
Clearance tolerances $\pm 2\%$

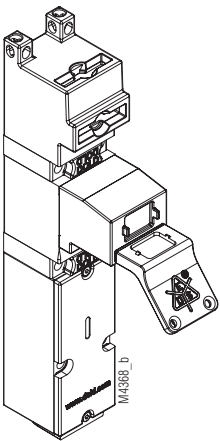

RX10A

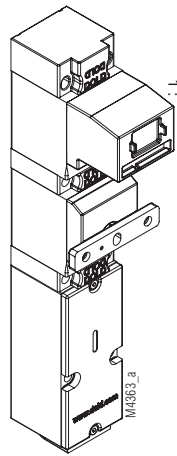

RXK01M