

KRTM 55

Multicolor contrast scanner

en 04-2012/11 50112063-01



13mm



- RGB transmitter
- Various teach variants
- Short response time
- Switching threshold adjustment via EasyTune
- Level adaptation for glossy objects
- 316L stainless steel housing in WASH-DOWN-Design
- Enclosed optics design prevents bacterial carry-overs
- ECOLAB and CleanProof+ tested
- Paperless device identification
- Scratch resistant and non-diffusive plastic front cover
- Keyboard lockout
- Remote teach via cable
- Pulse stretching 20ms




Accessories:

(available separately)

- Mounting systems (BT 3...)
- Cable with M8 or M12 connector (K-D ...)

Dimensioned drawing

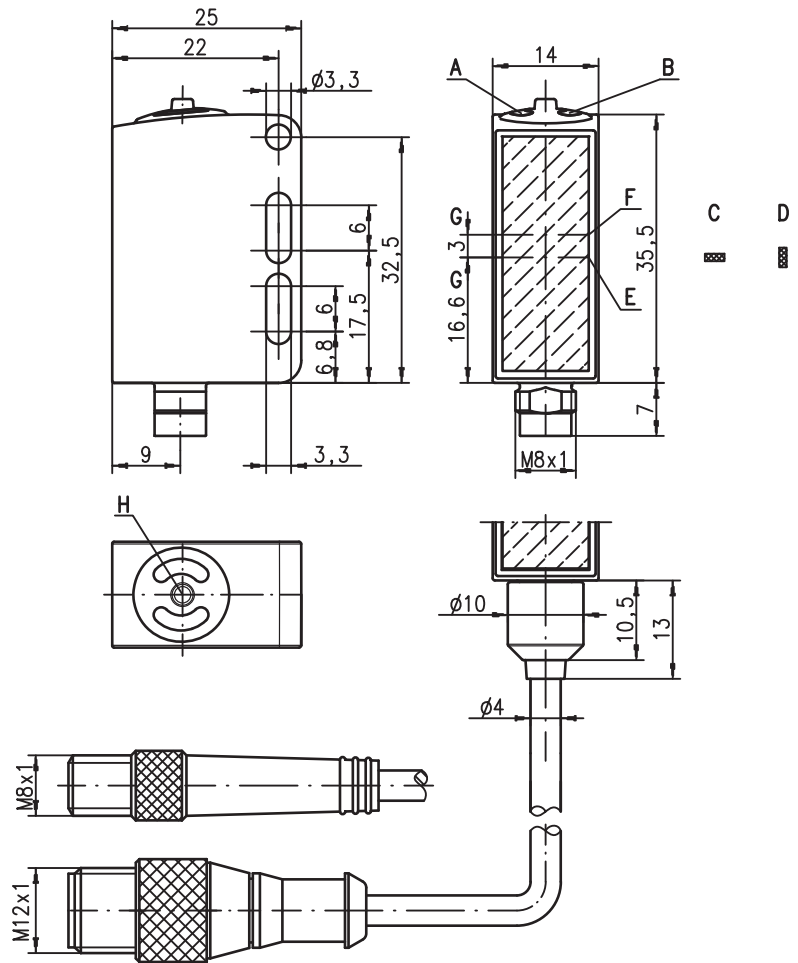

- A Green indicator diode
- B Yellow indicator diode
- C Light spot orientation horizontal
- D Light spot orientation vertical
- E Transmitter
- F Receiver
- G Optical axis
- H Teach button

Electrical connection

Connector, 4-pin

10-30V DC +	1	br/BN
IN	2	ws/WH
GND	3	bl/BU
OUT 1	4	sw/BK

We reserve the right to make changes • DS_KRTM55_en_50112063-01.fm

Specifications

Optical data

Scanning range ¹⁾	13mm ± 2mm
Light spot dimensions	1.5mm x 4mm (at a distance of 13mm)
in RUN-Mode	1.5mm x 6.5mm (at a distance of 13mm)
in Teach-Mode	vertical or horizontal (see dimensioned drawing)
Light spot orientation	LEDs (red, green, blue)
Light source ²⁾	640nm, 525nm, 470nm
Wavelength	

Sensor operating modes

IO-Link	COM2 (38.4kBaud)
SIO	standard push-pull
Dual Core	no

Timing of the sensor

Internal switching frequency	10kHz
Internal response time	50µs
Response jitter, internal	20µs
Repeatability ³⁾	0.02mm
Delay before start-up	≤ 300ms
Conveyor speed during teach	≤ 0.1 m/s for a mark width of 1 mm
Teach process	static 1-point, static 2-point or dynamic 2-point
Teach delay	≤ 10ms

Timing of the outputs

Response time	pin 4	IO-Link COM2: acc. to IO-Link specification (typically 2.5ms)
		SIO: 50µs

Electrical data

Operating voltage U_B ⁴⁾	with SIO	10 ... 30VDC (incl. residual ripple)
	with COM2	18 ... 30VDC (incl. residual ripple)
Residual ripple		≤ 15% of U_B
Output/function	.../2...	pin 4: GND if mark detected
	.../4...	pin 4: U_B if mark detected
	.../6...	pin 4: IO-Link SIO mode, U_B if mark detected
	.../6...	pin 4: IO-Link COM2 mode, see configuration file IODD
Signal voltage high/low		≥ (U_B -2V)/≤ 2V
Output current		max. 100mA
Open-circuit current		≤ 25mA

Indicators

Green LED in continuous light	ready
Green and yellow LED flashing at 3Hz	teach event active
Green and yellow LED flashing at 8Hz	teaching error
Green LED off and yellow LED flashing at 8Hz	sensor error
Yellow LED in continuous light	mark detected (dependent on the teach sequence)
Transmitter LEDs flashing at 8Hz	teaching error

Mechanical data

Housing	AISI 316L stainless steel, DIN X2CrNiMo17132, W.No1.4404
Housing design	WASH-DOWN-Design
Housing roughness ⁵⁾	Ra ≤ 2.5
Connector	AISI 316L stainless steel, DIN X2CrNiMo17132, W.No1.4404
Optics cover	coated plastic (PMMA), scratch resistant and non-diffusive
Operation	plastic (TPV-PE), non-diffusive
Weight	with M8 connector: 40g
	with 200mm cable and M12 connector: 60g
	with 5000mm cable: 110g
	M8 connector, 4-pin,
	0.2m cable with M12 connector, 4-pin
	5m cable, 4 x 0.20mm ²
Connection type	

Environmental data

Ambient temp. (operation/storage) ⁶⁾	-30°C ... +70°C/-30°C ... +70°C
Protective circuit ⁷⁾	2, 3
VDE safety class ⁸⁾	III
Protection class ⁹⁾	IP 67, IP 69K
Environmentally tested acc. to	ECOLAB, CleanProof+
LED class	1 (in accordance with EN 60825-1)
Standards applied	IEC 60947-5-2
Certifications	UL 508 ⁴⁾
Chemical resistance	tested in accordance with ECOLAB and CleanProof+ (see Remarks)

Options

Input pin 2	
Function characteristics	keyboard lockout / line teach / pulse stretching
Input active/not active	≥ 8V/≤ 2V or not connected
Output pin 4	
Line teach active	for SIO
	for COM2
	2Hz at the switching output
	see configuration file IODD
Error after line teach	for SIO
	for COM2
	2Hz at the switching output
	see configuration file IODD


- 1) Scanning range: recommended range with performance reserve
- 2) Average life expectancy 100,000h at an ambient temperature of 25°C
- 3) At conveyor speed 1 m/s
- 4) For UL applications: for use in class 2 circuits according to NEC only
- 5) Typical value for the stainless steel housing
- 6) Operating temperatures of +70°C permissible only briefly (≤ 15min)
- 7) 2=polarity reversal protection, 3=short circuit protection for all transistor outputs
- 8) Rating voltage 50V
- 9) IP 69K only in combination with M12 connector

Tables

Diagrams

Remarks

- **Approved purpose:**
This product may only be used by qualified personnel and must only be used for the approved purpose. This sensor is not a safety sensor and is not to be used for the protection of persons..
- With glossy objects, the sensor is to be fastened at an inclination of approx. 10° relative to the object surface.



- For applications in wet environment, the customer must protect the M8-connection against humidity.

KRTM 55

Multicolor contrast scanner

Order guide

Selection table			Order code →									
Equipment ↓			KRTM 55/6.1121-S8 Part no. 50111643	KRTM 55/4.1121-S8 Part no. 50111644	KRTM 55/4.1121,200-S12 Part no. 50110611	KRTM 55/2.1121-S8 Part no. 50110610	KRTM 55/2.1121,200-S12 Part no. 50110612	KRTM 55/4.1221-S8 Part no. 50110613	KRTM 55/2.1221-S8 Part no. 50110614	KRTM 55/4.1221,200-S12 Part no. 50110615	KRTM 55/2.1221,200-S12 Part no. 50110616	KRTM 55/4.1221,5000 Part no. 50114074
Transmitter color	white light											
	RGB (red, green, blue)		●	●	●	●	●	●	●	●	●	●
	laser-generated red light											
Light spot orientation	vertical		●	●	●	●	●	●	●	●	●	●
	horizontal											
	round											
Output (OUT 1)	PNP transistor output			●	●			●		●		●
	NPN transistor output					●	●		●		●	
	push-pull switching output		●									
	IO-Link COM2		●									
Input (IN)	teach input		●	●	●	●	●	●	●	●	●	●
Connection	M8 connector, metal	4-pin	●	●		●		●	●			
	200mm cable with M12 connector	4-pin			●		●			●	●	
	cable 5000mm, 4-wire											●
Teach process	static 1-point											
	static 2-point		●	●	●	●	●					●
	dynamic 2-point							●	●	●	●	
Response time / Switching frequency	50μs / 10kHz		●	●	●	●	●	●	●	●	●	●
	83μs / 6kHz											
	125μs / 4kHz											
Configuration	switching threshold adjustment with EasyTune via teach button		●	●	●	●	●	●	●	●	●	●
	remote teach, keyboard lockout and pulse stretching via pin 2		●	●	●	●	●	●	●	●	●	●
	teach level 1, teach-level 2 and pulse stretching via teach button		●	●	●	●	●	●	●	●	●	●

IO-Link process data

The sensor transmits 2 bytes to the master.

Data bit																Assignment	Default settings
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
																Switching output	0 = no mark, 1 = mark detected
																Not assigned	Free
																Sensor operation	0 = off, 1 = on
																Switching threshold LSB	Value range 0 ... 31 (0 ... 100% in approx. 3% steps) 0% = min. switching threshold 100% = max. switching threshold
																Switching threshold	
																Switching threshold	
																Switching threshold	
																Switching threshold MSB	
																Active transmitter LSB	00 = red, 01 = green or white,
																Active transmitter MSB	10 = blue, 11 = all colors on (teach-in active)
																Not assigned	Free
																Measurement value LSB	Value range 0 ... 31 (0 ... 100% in approx. 3% steps) 0% = min. signal level 100% = max. signal level
																Measurement value	
																Measurement value	
																Measurement value	
																Measurement value MSB	



Additional information on the IO-Link service data is available on request.

Static 2-point teach

Suitable for manual positioning of the marks (availability dependent on sensor type).

Switching threshold in center:

<p>Position the background.</p>	<p>Press teach button for 2 ... 7s and release.</p> <p>2 ... 7s Value for background is accepted.</p>	<p>LEDs flash simultaneously.</p> <p>Simultaneous flashing</p>	<p>Position the mark.</p>	<p>Briefly press teach button.</p> <p>Value for mark is accepted.</p>	<p>Sensor in RUN mode. Yellow LED illuminates.</p> <p>Switching threshold set in the center.</p>
---------------------------------	--	---	---------------------------	---	--

Switching threshold near the mark:

<p>Position the background.</p>	<p>Press teach button for 7 ... 12s and release.</p> <p>7 ... 12s Value for background is accepted.</p>	<p>LEDs flash alternatingly.</p> <p>Alternating flashing</p>	<p>Position the mark.</p>	<p>Briefly press teach button.</p> <p>Value for mark is accepted.</p>	<p>Sensor in RUN mode. Yellow LED illuminates.</p> <p>Switching threshold is set near the mark.</p>
---------------------------------	--	---	---------------------------	---	---







KRTM 55

Multicolor contrast scanner







Dynamic 2-point teach

Suitable for marks moved during automated machine processes (availability dependent on sensor type).

Switching threshold in center

Position the background.	Press teach button for 2 ... 7 s.	LEDs flash simultaneously.	Allow marks to pass through dynamically.	Briefly press teach button.	Sensor in RUN mode. Yellow LED is off.
	 2 ... 7 s Measurement window opens.	 Simultaneous flashing		 Measurement window closes.	 Switching threshold set in the center.






Switching threshold near the mark

Position the background.	Press teach button for 7 ... 12 s.	LEDs flash alternatingly.	Allow marks to pass through dynamically.	Briefly press teach button.	Sensor in RUN mode. Yellow LED is off.
	 7 ... 12 s Measurement window opens.	 Alternating flashing		 Measurement window closes.	 Switching threshold is set near the mark.






Static 1-point teach

Suitable for detecting all marks outside of the reference value (availability dependent on sensor type).

Standard sensitivity

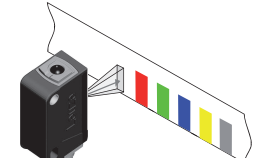
Position the reference value.	Press teach button for 2 ... 7 s.	LEDs flash simultaneously.	Release teach button.	Sensor in RUN mode. Yellow LED is off.
	 2 ... 7 s	 Simultaneous flashing	 Value is accepted.	 Standard sensitivity is set.

High sensitivity

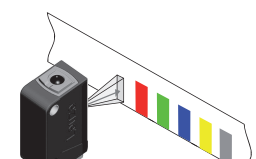
Position the reference value.	Press teach button for 7 ... 12 s.	LEDs flash alternatingly.	Release teach button.	Sensor in RUN mode. Yellow LED is off.
	 7 ... 12 s	 Alternating flashing	 Value is accepted.	 High sensitivity is set.

Switching threshold diagrams


Static 2-point teach

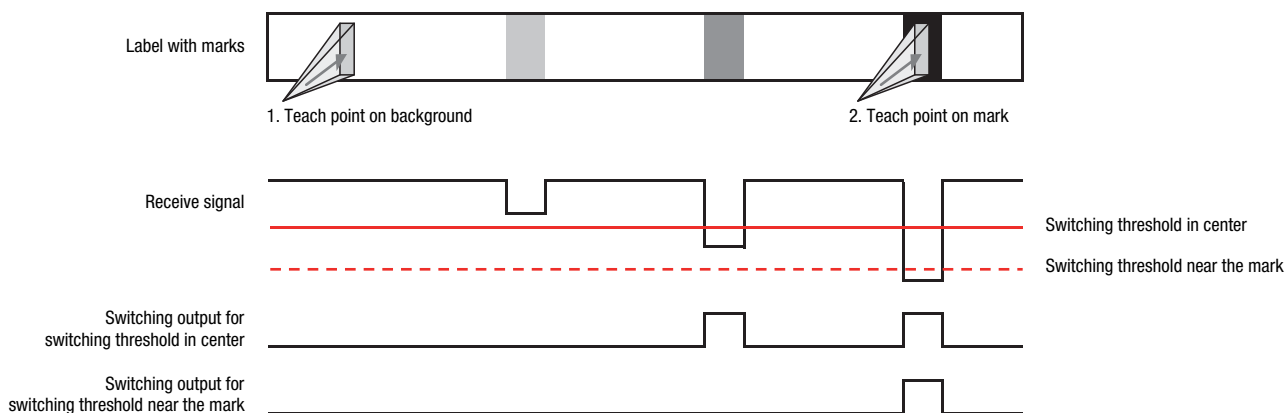

Dynamic 2-point teach

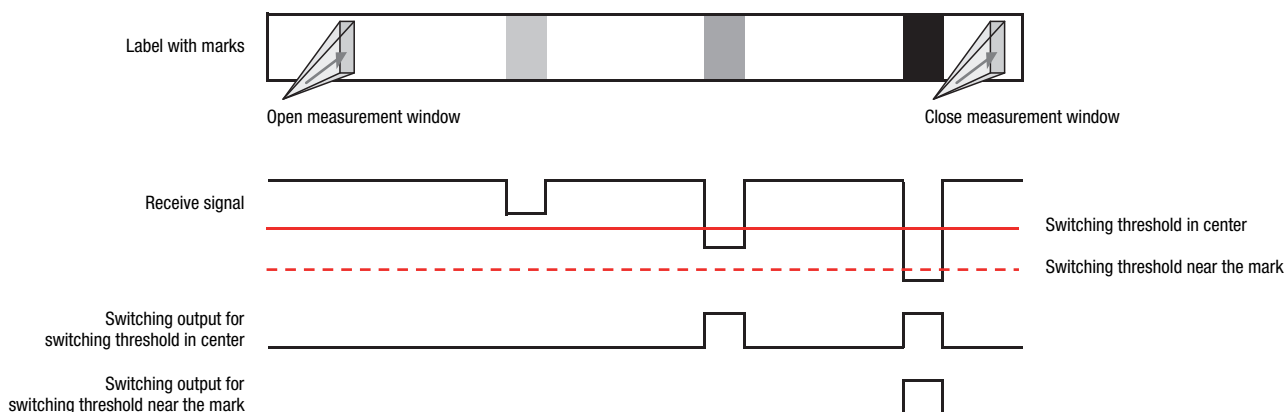

Static 1-point teach

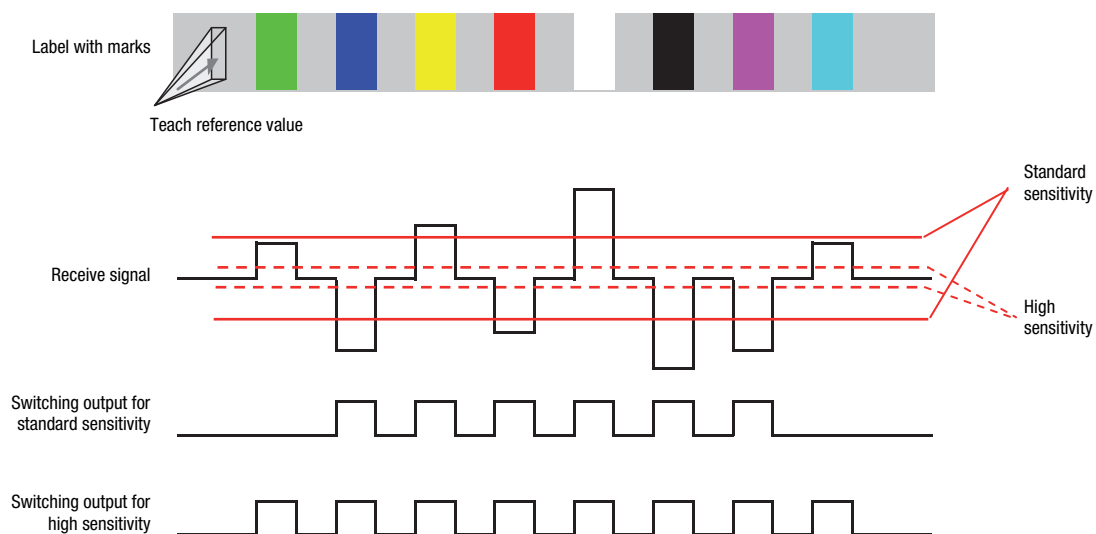


KRTM 55

Multicolor contrast scanner

Pulse stretching option

Switching pulse stretching on or off:

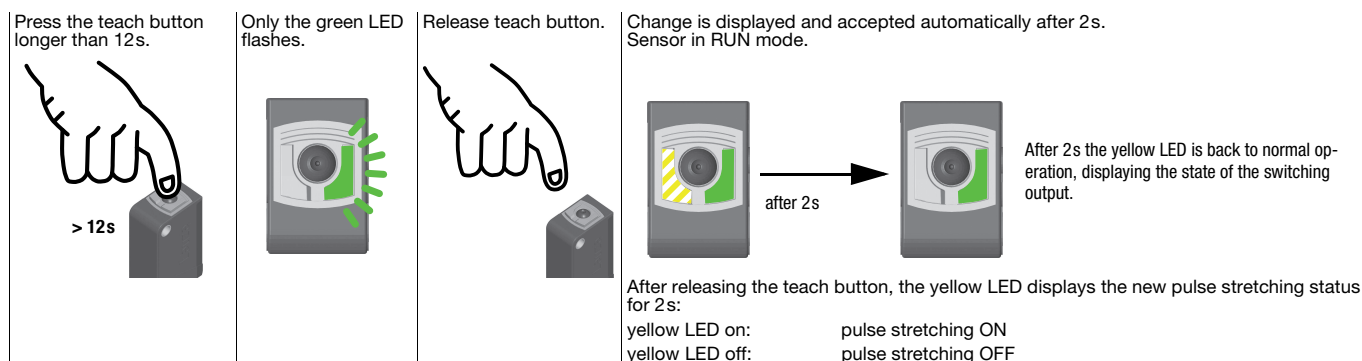

"EasyTune" option - fine tuning of the switching threshold

Following power-on and completed teach event:


Green LED illuminates continuously (ready)

Yellow LED on/off continuously (mark detected/not detected)

Increasing the switching threshold:


Long press of the button = large force expenditure = increase switching threshold

Each press of the button with a duration between 200ms and 2s increments the switching threshold.



Green LED flashes briefly once



A press of the button is acknowledged by a single, brief **flash of the green LED** – the new switching threshold is now valid.

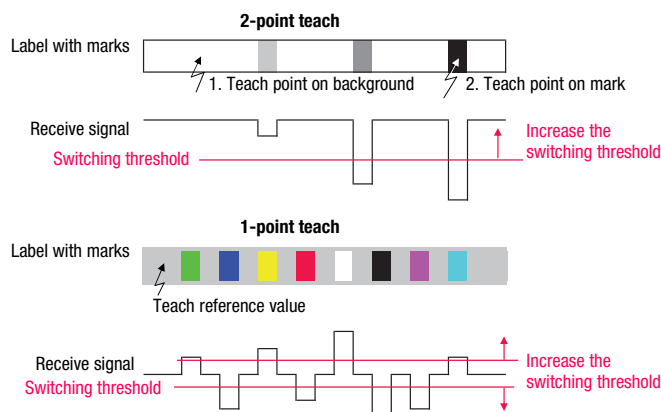

Reducing the switching threshold:


Short press of the button = small force expenditure = reduce switching threshold

Each press of the button with a duration between 2ms and 200ms decrements the switching threshold.



Green LED flashes briefly once

A press of the button is acknowledged by a single, brief **flash of the green LED** – the new switching threshold is now valid.

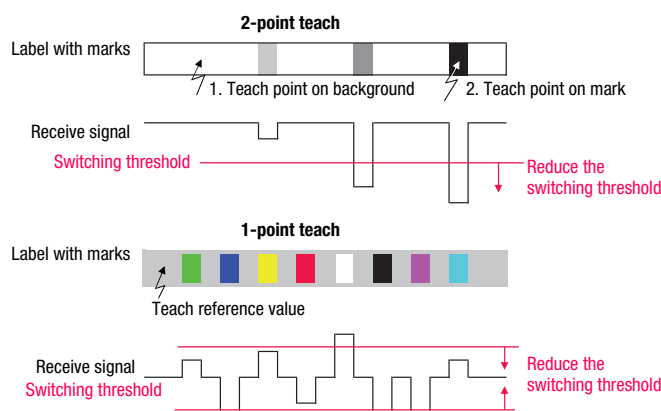

If the upper or lower end of the adjustment range is reached, the green and yellow LEDs flash at a considerably higher frequency of 8Hz for the duration of one second.

Sensor adjustments via the input IN (Pin 2)




The following description applies to PNP switching logic!

Signal level LOW $\leq 2V$


Signal level HIGH $\geq (U_B - 2V)$

With the NPN models, the signal levels are inverted!


Switching threshold in center / standard sensitivity

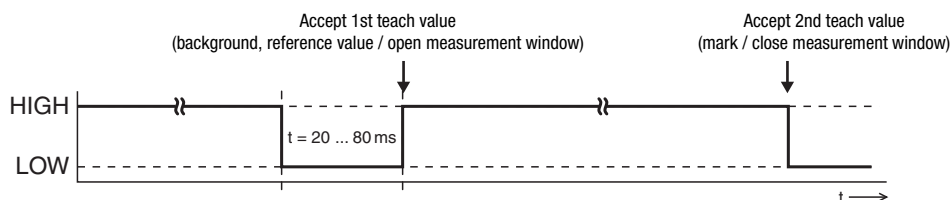


Switching threshold near the mark / high sensitivity

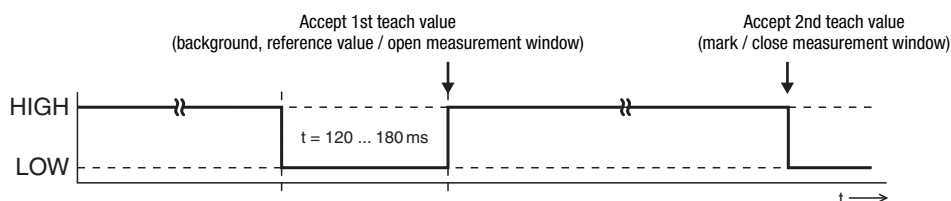

Pulse stretching ON

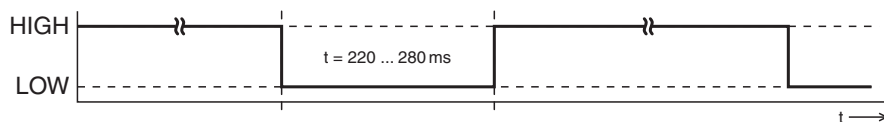

Pulse stretching OFF

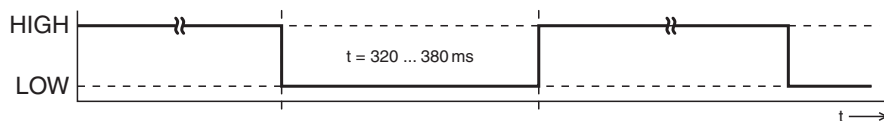

Locking the teach button via the input IN (Pin 2)



A static **HIGH** signal ($\geq 20ms$) at the teach input locks the teach button on the sensor if required, such that no manual operation is possible (e.g., protection from erroneous operation or manipulation).

If the teach input is not connected or if there is a static low signal, the button is unlocked and can be operated freely.

