


ET328I

Energetic reflection light scanner

en 02-2015/09 50128294



Dimensioned drawing

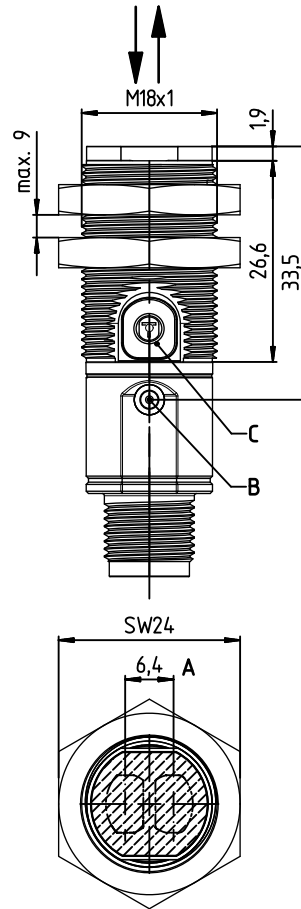


- A** Optical axes
- B** Indicator diode
- C** Teach button

1 ... 1000mm

- Energetic reflection light scanner
- Preset scanning range 400mm on white object; scanning range adjustment via teach-in
- Infrared light for universal use
- Active suppression of extraneous light A²LS
- Simple fine adjustment via *omni-mount*
- Embedded mounting option
- Full control through green and yellow indicator LEDs
- Sturdy plastic housing with stainless steel threaded sleeve with cylindrical M18x1 design

Electrical connection

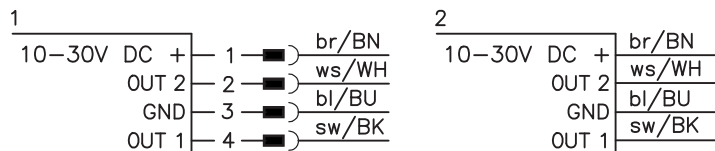

Accessories:

(available separately)

- Mounting systems (BT D18M.5, BT D21M, BT 318...)
- M12 connectors (KD ...)
- Ready-made cables (K-D ...)

We reserve the right to make changes • DS_ET328I_en_50128294.fm

Specifications

Optical data

| | |
|------------------------------------|------------------------|
| Scanning range limit ¹⁾ | 1 ... 1000mm |
| Scanning range ²⁾ | 1 ... 700mm |
| Light source | LED (modulated light) |
| Wavelength | 850nm (infrared light) |

Timing

| | |
|-----------------------|---------|
| Switching frequency | 500Hz |
| Response time | 1ms |
| Delay before start-up | ≤ 300ms |

Electrical data

| | |
|---------------------------------------|--|
| Operating voltage U_B ³⁾ | 10 ... 30VDC (incl. residual ripple) |
| Residual ripple | ≤ 15% of U_B |
| Open-circuit current | ≤ 20mA |
| Switching output | .../4P... 2 PNP transistor outputs pin 2: PNP dark switching, pin 4: PNP light switching .../2N... 2 NPN transistor outputs pin 2: NPN dark switching, pin 4: NPN light switching |
| Signal voltage high/low | $\geq (U_B - 2.5V) \leq 2.5V$ |
| Output current | max. 100mA ⁴⁾ |

Indicators

| | |
|------------|------------------------------|
| Green LED | ready |
| Yellow LED | reflection (object detected) |

Mechanical data

| | |
|-----------------|---|
| Housing | plastic |
| Optics cover | plastic |
| Weight | 30g with M12 connector 80g with 2m cable |
| Connection type | M12 connector, 4-pin cable 2m, 4x0.20mm ² |

Environmental data

| | |
|-----------------------------------|---|
| Ambient temp. (operation/storage) | -40°C ... +60°C/-40°C ... +70°C |
| Protective circuit ⁵⁾ | 2, 3 |
| VDE safety class | III |
| Degree of protection | IP 67 |
| Light source | exempt group (in acc. with EN 62471) |
| Standards applied | IEC 60947-5-2 |
| Certifications | UL 508, C22.2 No.14-13 ³⁾ 6) |

- 1) Scanning range limit: typical scanning range
- 2) Scanning range: ensured scanning range
- 3) For UL applications: for use in class 2 circuits according to NEC only
- 4) Sum of the output currents for both outputs, 50mA when ambient temperatures > 40°C
- 5) 2=polarity reversal protection, 3=short circuit protection for all outputs
- 6) These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)


Tables

| | | | |
|---|---|-----|------|
| 1 | 1 | 700 | 1000 |
| 2 | 1 | 590 | 850 |
| 3 | 3 | 390 | 550 |
| 4 | 5 | 280 | 400 |


| | |
|---|-----------|
| 1 | white 90% |
| 2 | gray 50% |
| 3 | gray 18% |
| 4 | black 6% |

| | |
|---|--------------------------------|
| □ | Scanning range [mm] |
| ■ | Typ. scanning range limit [mm] |

Diagrams



- A white 90%
- B gray 50%
- C gray 18%
- D black 6%



Remarks

Operate in accordance with intended use!

- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with the intended use.

- With the set scanning range, a tolerance of the scanning range limits is possible depending on the reflection properties of the material surface.

ET328I

Energetic reflection light scanner

Order guide



The sensors listed here are preferred types; current information at www.leuze.com.

| | | Designation | Part no. | |
|--|--|---|----------------------|------------|
| Sensors with axial optics | With M12 connector | Pin 4: PNP light switching, pin 2: PNP dark switching | ET328I-400F.3/4P-M12 | On request |
| | | Pin 4: NPN light switching, pin 2: NPN dark switching | ET328I-400F.3/2N-M12 | On request |
| | With cable, 2m | Pin 4: PNP light switching, pin 2: PNP dark switching | ET328I-400F.3/4P | 50128196 |
| | | Pin 4: NPN light switching, pin 2: NPN dark switching | ET328I-400F.3/2N | 50128197 |
| Accessories for optimum fastening | | | | |
| | Mounting system <i>omni-mount</i> | BT318B-OM | 50121904 | |
| | Mounting bracket for standard mounting | BT D18M.5 | 50113548 | |
| | Mounting bracket for <i>omni-mount</i> | BT D21M | 50117257 | |

Part number code

| | | E | T | 3 | 2 | 8 | I | - | 4 | 0 | 0 | F | . | 3 | / | 4 | P | - | M | 1 | 2 |
|--|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Operating principle | | | | | | | | | | | | | | | | | | | | | |
| ET | Energetic reflection light scanner | | | | | | | | | | | | | | | | | | | | |
| Series | | | | | | | | | | | | | | | | | | | | | |
| 328I | Series 328 with infrared light | | | | | | | | | | | | | | | | | | | | |
| Scanning range presetting | | | | | | | | | | | | | | | | | | | | | |
| -400F | Scanning range preset to 400mm (white object, 90%) | | | | | | | | | | | | | | | | | | | | |
| Equipment | | | | | | | | | | | | | | | | | | | | | |
| .3 | Axial optics, teach-in via teach button | | | | | | | | | | | | | | | | | | | | |
| Switching output/function /OUT1/OUT2 (OUT1 = Pin 4, OUT2 = Pin 2) | | | | | | | | | | | | | | | | | | | | | |
| 4 | PNP, light switching | | | | | | | | | | | | | | | | | | | | |
| P | PNP, dark switching | | | | | | | | | | | | | | | | | | | | |
| 2 | NPN, light switching | | | | | | | | | | | | | | | | | | | | |
| N | NPN, dark switching | | | | | | | | | | | | | | | | | | | | |
| Electrical connection | | | | | | | | | | | | | | | | | | | | | |
| -M12 | M12 connector, 4-pin | | | | | | | | | | | | | | | | | | | | |
| N/A | Cable, standard length 2m | | | | | | | | | | | | | | | | | | | | |

Teach-in method
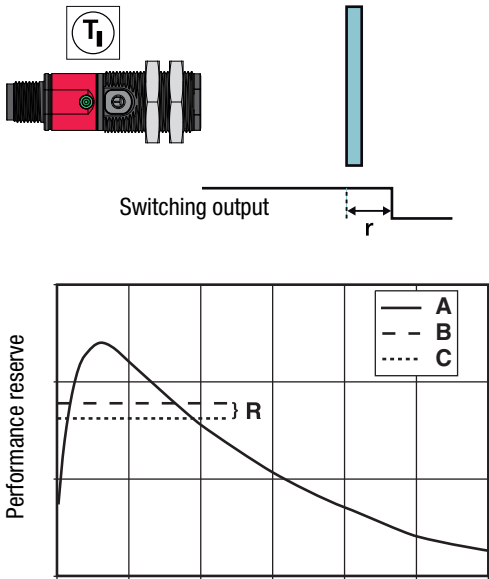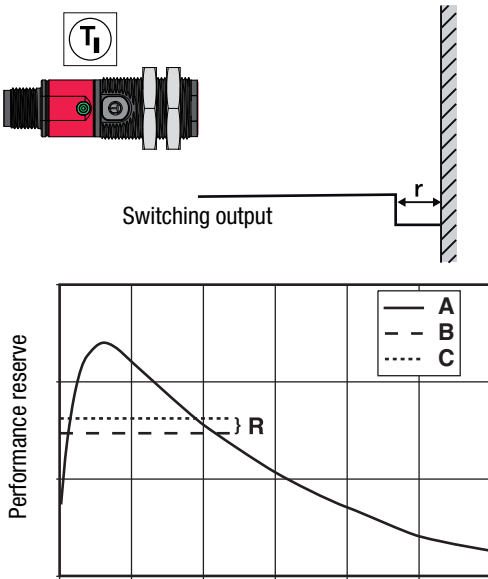
| Teach | Operating level 1 | Operating level 2 |
|----------------|---|---|
| Standard Teach | <p>Teach on object:</p> <p>With this teach event, the object is located in front of the sensor. The switching threshold is set by the teach so that the object is detected with tight signal reserve R. Thus, the object is detected even if the distance increases by the value r with respect to the distance during the teach.</p>  <p>A Signal - object B Teach on object C Switching threshold</p> | <p>Teach on background:</p> <p>This teach is only suitable for applications with a fixed background. The teach is performed directly on the background without an object. The switching threshold is set to a value that is just above the background signal (signal reserve R). Thus, objects can be detected up to a distance of r in front of the background.</p>  <p>A Signal - background B Teach on background C Switching threshold</p> |


ET328I

Energetic reflection light scanner

Operation via teach button


Teach in operating level 1

- Press teach button until the **yellow** LED flashes.
- Release teach button.
- Ready.



Teach in operating level 2

- Press teach button until **green** and **yellow** LEDs flash **alternately**.
- Release teach button.
- Ready.



Adjusting the switching behavior of the switching output – light/dark switching


This function permits inversion of the sensors' switching logic.

- Press teach button until the **green** LED flashes.
- Release teach button.
- The LED then displays the changed switching logic for **2s**:

YELLOW Cont. light = switching outputs **light switching** (in the case of complementary sensors, Q1 (pin 4) light switching, Q2 (pin 2) dark switching), this means output active when object is detected.

GREEN Flash. light = switching outputs **dark switching** (in the case of complementary sensors, Q1 (pin 4) dark switching, Q2 (pin 2) light switching), this means output inactive when object is detected.

- Ready.



2s YELLOW = light switching

or



flashes GREEN for 2s = dark switching

