

Contactor monitoring device CMD(220-240VAC), CMDB



Powering Business Worldwide

All brand and product names are trademarks or registered trademarks of the owner concerned.

Emergency On Call Service

Please call your local representative:

<http://www.eaton.com/moeller/aftersales>

or

Hotline of the After Sales Service:

+49 (0) 180 5 223822 (de, en)

AfterSalesEGBonn@eaton.com

Original Operating Instructions

The German-language edition of this document is the original operating manual.

Translation of the original operating manual

All editions of this document other than those in German language are translations of the original German manual.

1st published 2007, edition date 11/07

2nd edition 2009, edition date 02/09

3rd edition 2012, edition date 10/12

See revision protocol in the "About this manual" chapter

© 2007 by Eaton Industries GmbH, 53105 Bonn

Production: Heidrun Riege; René Wiegand

Translation: Terence Osborn

All rights reserved, including those of the translation.

No part of this manual may be reproduced in any form (printed, photocopy, microfilm or any other process) or processed, duplicated or distributed by means of electronic systems without written permission of Eaton Industries GmbH, Bonn.

Subject to alteration without notice.



Danger!

Dangerous electrical voltage!

Before commencing the installation

- Disconnect the power supply of the device.
- Ensure that devices cannot be accidentally restarted.
- Verify isolation from the supply.
- Earth and short circuit.
- Cover or enclose neighbouring units that are live.
- Follow the engineering instructions (IL/AWA) of the device concerned.
- Only suitably qualified personnel in accordance with EN 50110-1/-2 (VDE 0105 Part 100) may work on this device/system.
- Before installation and before touching the device ensure that you are free of electrostatic charge.
- The functional earth (FE) must be connected to the protective earth (PE) or to the potential equalisation. The system installer is responsible for implementing this connection.
- Connecting cables and signal lines should be installed so that inductive or capacitive interference does not impair the automation functions.
- Install automation devices and related operating elements in such a way that they are well protected against unintentional operation.
- Suitable safety hardware and software measures should be implemented for the I/O interface so that a line or wire breakage on the signal side does not result in undefined states in the automation devices.
- Ensure a reliable electrical isolation of the low voltage for the 24 volt supply. Only use power supply units complying with IEC 60364-4-41 (VDE 0100 Part 410) or HD 384.4.41 S2.
- Deviations of the mains voltage from the rated value must not exceed the tolerance limits given in the specifications, otherwise this may cause malfunction and dangerous operation.
- Emergency stop devices complying with IEC/EN 60204-1 must be effective in all operating modes of the automation devices. Unlatching the emergency-stop devices must not cause restart.
- Devices that are designed for mounting in housings or control cabinets must only be operated and controlled after they have been installed with the housing closed. Desktop or portable units must only be operated and controlled in enclosed housings.

- Measures should be taken to ensure the proper restart of programs interrupted after a voltage dip or failure. This should not cause dangerous operating states even for a short time. If necessary, emergency-stop devices should be implemented.
- Wherever faults in the automation system may cause damage to persons or property, external measures must be implemented to ensure a safe operating state in the event of a fault or malfunction (for example, by means of separate limit switches, mechanical interlocks etc.).

Contents

	About this Manual	3
	Target group	3
	Writing conventions	3
	Abbreviations and symbols	4
	List of revisions	4
1	CMD contactor monitoring device	5
	Application of the CMD	5
	System overview	6
	Improper use	7
2	Engineering	9
	Distinction from other regulations	9
	Performance Level	9
	Control system of category 3	9
	Average diagnostic coverage DC_{avg}	10
	Mean time to dangerous failure $MTTF_d$	11
	Approvals	15
	Product standard	15
	Electromagnetic compatibility (EMC)	15
3	Installation	17
	Mounting	17
	Connection	17
	– Connection for DOL starters	18
	– Connection for reversing starters	19
	Wiring	20
4	Operating the device	21
	Function messages	21
	Test function	22

Appendix	23
Nameplates	23
Technical Data	24
– General	24
– Contacts	25
– Magnet systems	25
Dimensions	25

About this Manual

Target group	<p>This manual is aimed at specialist personnel involved in the design, installation, commissioning and maintenance of plant safety functions.</p> <p>It describes the use of the CMD contactor monitoring device in safety-related control systems.</p>
--------------	--

Writing conventions	Symbols used in this manual have the following meanings:
---------------------	--



Caution!
warns of the possibility of serious damage and slight injury.



Danger!
warns of the possibility of serious damage and slight injury or death.



Draws your attention to interesting tips and supplementary information.

For greater clarity, the name of the current chapter is shown in the header of the left-hand page and the name of the current section in the header of the right-hand page. Pages at the start of a chapter and empty pages at the end of a chapter are exceptions.

Abbreviations and symbols

IFA	Institute for Occupational Safety and Health (BGIA)
SIL	Safety Integrated Level
PL	Performance Level
CCF	Common cause failure
DC _{avg}	Average diagnostic coverage
MTTF _d	Mean time to dangerous failure
B _{10d}	Lifespan up to a dangerous failure
n _{op}	Mean number of annual switch operations
LED	LED

List of revisions

Edition date	page	Subject	New	Modi- fica- tion	Omitted
10/12	4, 5, 15	BGIA → IFA		✓	
	6, 25	CMD(110-120VAC)			✓
	7	PKZ2			✓
	9	Engineering IEC/EN 60204-1	✓		
	17	Installation	✓		
02/09	6	section "System overview"		✓	
	15	section "Approvals"		✓	
	15	section "Product standard"	✓		
	17	section "Connection"		✓	
	23	section "Nameplates"		✓	
	25	section "Contacts"		✓	

1 CMD contactor monitoring device

Application of the CMD

In the event of an emergency in safety-related electrical control circuits, the hazardous plant section is shut down from the main power supply by means of contactors
→ Emergency stop (stopping in the event of an emergency) in accordance with IEC/EN 60204-1.

For Category 3 control systems in compliance with EN/ISO 3849, the connection of two contactors in series is recommended. This technique can be replaced using one contactor and the CMD contactor monitoring device connected to the backup circuit-breaker/motor-protective circuit-breaker in the plant.

The contactors must be provided with an auxiliary NC contact that operates as a mirror contact in accordance with IEC/EN 60947-4-1 Annex F. The contactors also require an additional auxiliary NO contact. The motor-protective circuit-breakers/circuit-breakers are provided with an undervoltage release.

In the event of a hazard the contactor is disconnected via an upstream safety PLC or a safety relay by means of an enable contact. The CMD compares the control voltage of the contactor with the status of the main contacts. The status of the main contacts is monitored via an auxiliary NC contact that acts as a mirror contact in accordance with IEC/EN 60947-4-1 Annex F.

If the contactor is welded, the status of the main contacts does not correspond to the status of the control voltage. The undervoltage release of the backup circuit-breaker is tripped via an internal relay in the CMD. This disconnects the outgoing section. The undervoltage release prevents the welded contactor from being switched on again.

The CMD contactor monitoring device is approved by the IFA in combination with Eaton contactors and circuit-breakers (→ section "System overview", Page 6).
A CE declaration of conformity and a prototype test certification are also available.

System overview




Figure 1: Contactor monitoring devices

The CMD contactor monitoring device requires a control power supply.

- CMD(220-240VAC), CMDB:
Control voltage 220 to 240 V, 50/60 Hz

The CMD relay can be combined with the following Eaton contactors, motor-protective circuit-breakers and circuit-breakers:

- Contactors/contact modules, fitted with an auxiliary NC contact as mirror contact and an additional auxiliary NO contact.
 - DILM(C)7, DILM(C)9, DILM(C)12, DILM(C)15, DILM(C)17, DILM(C)25, DILM(C)32, DILM(C)40, DILM(C)50, DILM(C)65, DILM(C)72, DILM(C)80, DILM(C)95, DILM(C)115, DILM(C)150, DILM(C)170.
 - DILEEM and DILEM.
 - DILM185A(-S), DILM225A(-S), DILM250(-S), DILM300A(-S), DILM400(-S), DILM500(-S).
 - DILM580, DILM650, DILM750, DILM820, DILM1000.
 - DILH1400, DILH2000.



The contactor must be provided with an auxiliary NC contact that is designed as a mirror contact in accordance with IEC/EN 60947-4-1 Annex F.

The auxiliary NO contact and auxiliary NC contact must be interlocked opposing in accordance with IEC/EN 60947-5-1 Annex L.

The contactor and the CMD are fed with the same control voltage.

- Motor-protective circuit-breaker, circuit-breaker and switch-disconnector, fitted with an undervoltage release
 - NZM1, N1 + NZM1-XUVL
 - NZM2, N2 + NZM2/3-XUV
 - NZM3, N3 + NZM2/3-XUV
 - NZM4, N4 + NZM4-XUV

Improper use

The CMD contactor monitoring device has only been tested and approved in combination with the Eaton contactors and circuit-breakers that are listed in section "System overview", (→ page 6).



The CMD must therefore only be combined with these devices.

2 Engineering

Distinction from other regulations	<p>The safety-related part of the CMD contactor monitoring device's control system has EN/ISO 13849-1 approval. The CMD is used for safety-related applications in machine control systems. It has not been assigned to a SIL category as per IEC/EN 61508. The system must be set up as per IEC/EN 60204-1.</p>
Performance Level	<p>The CMD contactor monitoring device can be used to set up control systems that meet the requirements of performance level (PL) "d" as per EN/ISO 13849-1. The control system's setup meets the requirements of category "3" as per EN/ISO 13849-1. In order to reach a PL of "d," a common-cause failure (CCF) analysis must be performed for the control system.</p> <p>The control system must meet the requirements of one of the following two combinations of the average diagnostic coverage (DC_{avg}) and the mean time to dangerous failure ($MTTF_d$):</p> <ul style="list-style-type: none">• DC_{avg} = low and $MTTF_d$ = medium to high, or• DC_{avg} = medium and $MTTF_d$ = medium
Control system of category 3	<p>The CMD contactor monitoring device can be used in combination with DOL starters or reversing starters. The schematics are shown in section "Connection" (→ page 17).</p>



Two CMD relays are required in reversing starter circuits.

To attain category 3, faults were excluded by wiring inside a control cabinet.

On disconnection via the undervoltage release, a time delay of 100 ms ± 20 % can occur.

An enable circuit must be protected with a max. 2 A gG/gL fuse to protect the internal relay contacts.

Average diagnostic coverage DC_{avg}

Disconnection in the event of a hazardous situation is implemented from two units that are included in the calculation as parallel channels:

- Channel 1: contactor,
- Channel 2: series connection of the CMD and undervoltage release of the motor-protective circuit-breaker/circuit-breaker.

The mirror contacts used allows a $DC_{avg} = 99$ % to be applied to channel 1.

For channel 2 the DC_{avg} for the CMD was calculated at $DC_{avg} = 90$ %. The undervoltage release can be estimated a $DC_{avg} = 60$ % provided that regular inspections are carried out.



The function of the undervoltage release must be tested manually at regular intervals.

The generally recognized inspection frequency is a hundred times more often than the MTTF_d. The test interval can be determined from:

$$T_{\text{Test}} = \frac{\text{MTTF}_d}{100} \quad (\text{formula 1})$$



section "Mean time to dangerous failure MTTF_d"
(→ page 11).

It is recommended that the test is carried out under no-load conditions.

Mean time to dangerous failure MTTF_d

The MTTF_d time for the assembly parts is based on

$$\text{MTTF}_d = \frac{B_{10d}}{0.1 \times n_{\text{op}}} \quad (\text{formula 2})$$

where:

B_{10d}: Lifespan up to a dangerous failure (→ Tables).

n_{op}: average number of annual switch operations

The MTTF_d time for the CMD contactor monitoring device was calculated at MTTF_d = 125 years. This value is based on a maximum operating frequency of 350,400 operations/year (1 operation per minute, 16 hours per day, 365 days a year).

The MTTF_d time of the contactors depends on the application. The utilization category in accordance with IEC/EN 60947-4-1 and the operating frequency are an important factor here. Depending on the utilization category, the following values can be applied to B_{10d},

→ Tabelle 1.

Table 1: B_{10d} values for contactors

Contactor	B _{10d} value		
	Utilization category AC-3 [Mill. switch operations]	Utilization category AC-4 [Mill. switch operations]	Utilization category AC-1 [Mill. switch operations]
DILM7	1.3	0.2	0.6
DILM9	1.3	0.2	0.6
DILM12	1.3	0.2	0.6
DILM15	0.75	0.2	0.6
DILM17	1.3	0.2	0.6
DILM25	1.3	0.2	0.6
DILM32	1.3	0.2	0.6
DILM40	1.3	0.2	0.6
DILM50	1.3	0.2	0.6
DILM65	1.3	0.2	0.6
DILM72	0.75	0.2	0.6
DILM80	1.3	0.2	0.6
DILM95	1.3	0.2	0.6
DILM115	1.3	0.2	0.6
DILM150	1.3	0.2	0.6
DILM170	0.75	0.2	0.6
DILM185	1.3	0.04	1.2
DILM225	1.3	0.04	0.6
DILM250	1.3	0.04	0.4
DILM300	1.3	0.04	1.7
DILM400	1.3	0.04	1.2
DILM500	1.3	0.04	0.3
DILM580	1.2	0.18	1.4

Contactor	B _{10d} value		
	Utilization category AC-3 [Mill. switch operations]	Utilization category AC-4 [Mill. switch operations]	Utilization category AC-1 [Mill. switch operations]
DILM650	1.2	0.18	1.2
DILM750	1.2	0.06	1.0
DILM820	1.2	0.06	0.8
DILM1000	0.3	-	0.8
DILH1400	-	-	0.5
DILH2000	-	-	0.25

The MTTF_d time of the contactor is calculated according to formula 2 with the mean annual number of switch operations depending on the application.

The MTTF_d value of the undervoltage release depends on the application. The following values can be estimated for B_{10d}:

Table 2: B_{10d} values for undervoltage release

Undervoltage release	B _{10d} value [Switch operations]
NZM1	10000
NZM2	10000
NZM3	7500
NZM4	5000

At an assumed operating frequency of 3 operations per day up to NZM2 and 1.33 operations per day for the NZM3 and NZM4 the $MTTF_d$ value is:

Table 3: $MTTF_d$ values for undervoltage releases

Undervoltage release	B_{10d} value [Switch operations]	Operations per working day	n_{op} [O/ year]	$MTTF_d$ [Years]
NZM1	10000	3	750	133
NZM2	10000	3	750	133
NZM3	7500	1.33	333	225
NZM4	5000	1.33	333	150



An annual inspection meets the requirements in accordance with section "Average diagnostic coverage DC_{avg} " (→ page 10).
For further calculation of the safety function see EN/ISO 13849.

Approvals

The CMD contactor monitoring device is approved by the IFA in combination with Eaton contactors and circuit-breakers (→ section "System overview", Page 6).

A CE declaration of conformity and a prototype test certification are also available.

The contactor monitoring device CMD has UL and CSA approval for the US and Canadian markets.

Product standard

The CMD contactor monitoring device meets the product standard for Low-voltage switchgear and controlgear – Part 5-1:

Control circuit devices and switching elements – Electromechanical control circuit devices, DIN/EN 60947-5-1 (IEC 60947-5-1).

Electromagnetic compatibility (EMC)

No particular EMC measures are required for the CMD contactor monitoring device.

The CMD complies with the following regulations:

- DIN/EN 61000-6-2: EMC generic standard, interference immunity for the industrial environment,
- DIN/EN 61000-6-4: EMC generic standard, emitted interferences for the industrial environment.

3 Installation

Mounting

The CMD contactor monitoring device is mounted on a DIN-rail. Any mounting position is possible.

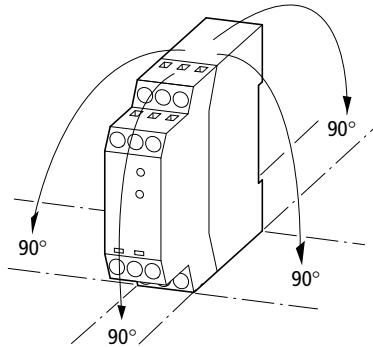


Figure 2: Mounting positions for CMD



The electrical mounting space must at least meet the requirements of IP54 protection.

During installation, a lateral clearance of at least 22.5 mm must be kept from other devices.

Connection

The CMD relay can be used for DOL starters and for reversing starters.



All connected devices, such as pushbuttons, must have a rated insulation voltage $U_i \geq 300 \text{ V}$.

Connection for DOL starters

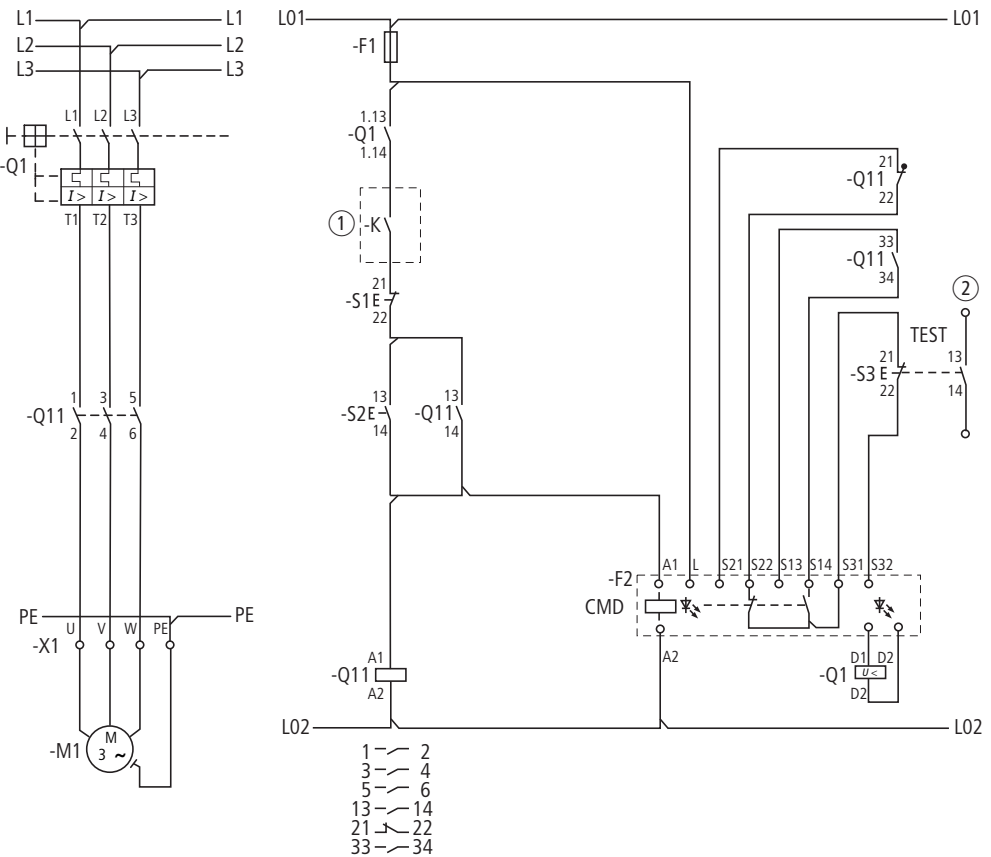


Figure 3: DOL starter

- ① Switching by safety relay or safety PLC
- ② Signal contact to PLC evaluation

Connection for reversing starters

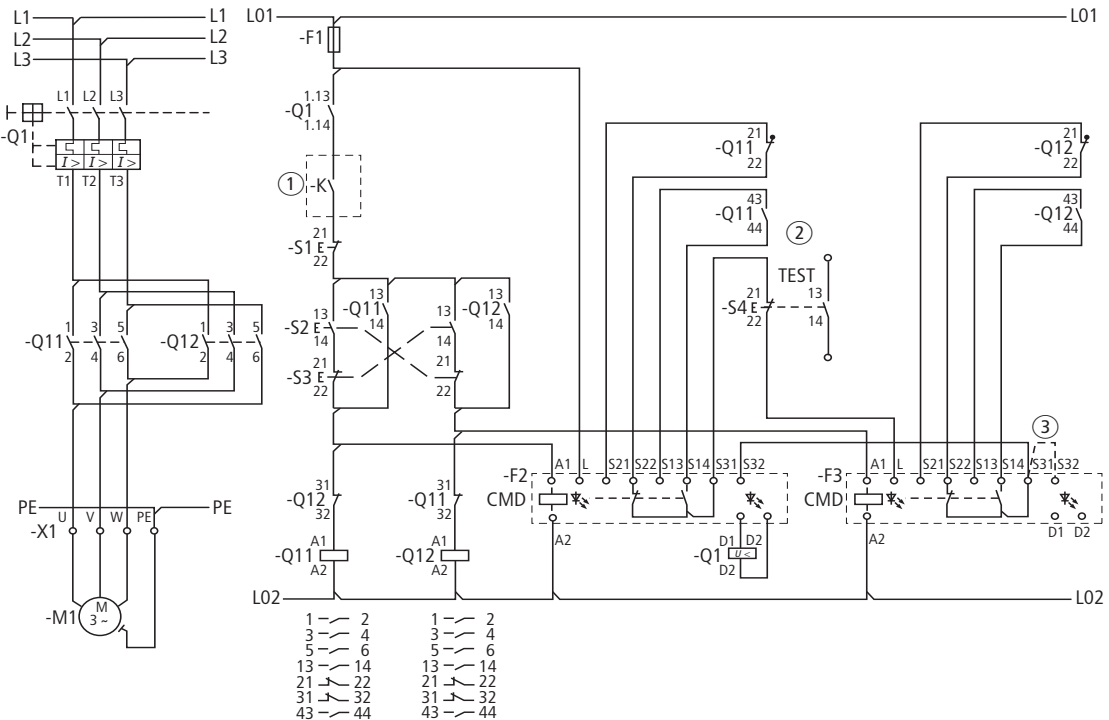





Figure 4: Reversing starter

- ① Switching by safety relay or safety PLC
- ② Signal contact to PLC evaluation

Wiring The following cables can be used for wiring at the terminals at the CMD contactor monitoring device.

Table 4: Cable cross-sections

 mm²	 mm²	AWG	N/m	lb-In
1 x (0.5 - 2.5)	1 x (0.5 - 2.5)	20 - 14	0.8 - 1.2	7.0 - 10.6
2 x (0.5 - 1.5)	2 x (0.5 - 1.5)	—	0.8 - 1.2	—

 IP2X
a ≤ 6 mm



The same cable cross-section must be used when wiring two cables in one terminal.

A size Z2 Phillips screwdriver or standard screwdriver size 0.8 x 4 to 5.5 are recommended tools for wiring the terminals on the CMD relay.

4 Operating the device

Function messages

The CMD contactor monitoring device is fitted with two internal LEDs for status indication at the device.

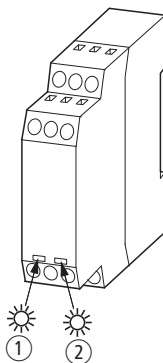


Figure 5: LED indication

- ① A green LED labelled „Contr.“ (Control)
The „Contr.“ LED indicates the control for the CMD and the contactor.
- ② A green UVR (Undervoltage Release) LED
The UVR LED indicates the state of the power supply to the undervoltage release. If the LED is off, the circuit-breaker has been tripped by the undervoltage release.

Test function


The control system must be tested regularly during operation via the Test button. An annual test is sufficient. The test determines the reliable operation of the undervoltage release. The test button must be provided with another NO contact in addition to the NC contact for the actual test. This contact signals the test to a PLC which then indicate the next test interval.



The test should be carried out in no-load conditions.

Appendix

Nameplates

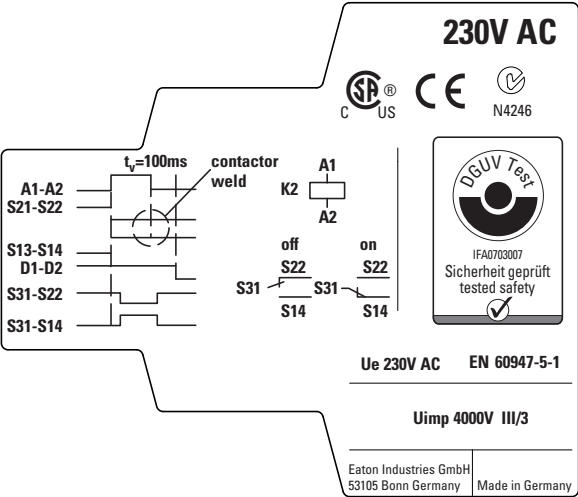

Technical Data			General
Standards			IEC/EN 60947; UL, CSA
Lifespan, mechanical			
DC operated	Operations	x 10 ⁶	3
Maximum operating frequency	Operations	x 10 ⁶	9000
Climatic proofing			<ul style="list-style-type: none"> • Damp heat, constant, to IEC 60068-2-78 • Damp heat, cyclic, to IEC 60068-2-30
Ambient air temperature			
Storage		°C	-40 - 80
Open ¹⁾		°C	-25 - 50
Mounting position			Any
Mechanical shock resistance (IEC/EN 60068-2-27)			
Half-sinusoidal shock 10 ms			
N/O		g	4
NC		g	4
Degree of protection			IP20
Protection against direct contact when actuated from front (VDE 0106 Part 100)			Finger- and back-of-hand proof
Weight		kg	0.1
Terminal capacity			
solid		mm ²	1 x (0.75 - 2.5)
			2 x (0.75 - 1.5)
Flexible with ferrule		mm ²	1 x (0.75 - 2.5)
			2 x (0.75 - 1.5)
Solid or stranded		AWG	20 - 14
Terminal Screw			M3.5
Poizdriv screwdriver		Size	2

Standard screwdriver	MM	0.8 x 5.5 / 1 x 6
max. tightening torque	N/m	1.2

1) Minimum clearance to adjacent devices: 22.5 mm

Contacts

CMD(220-240VAC)

Rated impulse withstand voltage	U_{imp}	V AC	4000
Overvoltage category/pollution degree			III/3
Rated insulation voltage	U_i	V AC	300
Rated operational voltage	U_e	V AC	240
Conventional thermal current	I_{th}	mA	65
Short-circuit protective device maximum fuse			
EN 60269-1		A gG/gL	2

Magnet systems

Voltage tolerance			
Pick-up voltage			
AC operated	Pick-up	$x U_c$	0.85 - 1.1
DC operated	Pick-up	$x U_c$	0.85 - 1.1
Power consumption			
DC operated	Pick-up = sealing	W	4
Duty factor		% DF	100
Delay time	t_u	ms	100 ±20 %

Dimensions

