



### Model Number

**KCT1-6SR-C**

Batch controller

### Features

- Counter/Timer/Tachometer
- Counter frequency up to 20 kHz
- 6-digit LED indicator, red
- 1 Pre-selection
- Status LED indication for output an preselection value
- Display range and preselection range from -199999 up to 999999  
Overflow will be evaluated correctly up to 1 decade
- Programmable functionality as pulse counter, frequency counter, timer or
- Relay output
- Adding/subtracting via 2 separate inputs
- PNP and NPN sensors can be connected
- Protection degree IP65 (front only)

### Technical data

#### General specifications

Pre-selection	single
Data storage	10 <sup>6</sup> storage cycles or 10 years
Programming	keypad-driven menu

#### Indicators/operating means

Type	7-segment LED display, red
Number of digits	6
Display value	digit height 8 mm
Pre-selection	switchable
Key interlock	with "high"-level at terminal "KEY"
Display interval	-99999 ... 999999
Decimal point	0 to max 3 fractional digits
Scale factor	0.0001 ... 99.9999
Reset	manually or external

#### Electrical specifications

Operating voltage	$U_B$	10 ... 30 V DC
Power consumption	$P_0$	max. 1.2 VA

#### Input

Counting frequency	20 kHz
Minimum pulse duration	5 ms for reset input
Impedance	approx. 10 kOhm
Voltage	low: 0 ... 0.2 x $U_e$ high: 0.6 x $U_e$ ... 30 V DC
Counting method	adding or subtracting

#### Output

Relay	250 V AC, max. 3 A 125 V DC, min. 30 mA changeover contact
Response time	7 ms


#### Ambient conditions

Ambient temperature	-10 ... 50 °C (263 ... 323 K)
Storage temperature	-25 ... 70 °C (248 ... 343 K)
Relative humidity	≤ 80 % (non-condensing)


#### Mechanical specifications

Connection	2 plug-in 7-pin screw terminals max. core cross-section 0.34 ... 1.5 mm <sup>2</sup>
Mass	approx. 200 g
Dimensions	48 mm x 48 mm x 106 mm
Mounting	latch fastener (dimension 50.5 mm x 54.5 mm)

Dimensions

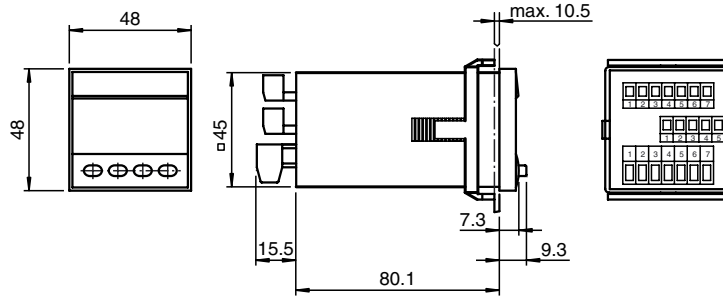

Electrical connection



Connector assignment X1  
supply voltage and outputs

Terminal No.	AC version	10 ... 30 V DC version
1	n.c.	
2	n.c.	
3	output relay common contact (C)	
4	output relay normally open contact (NO)	
5	output relay normally closed contact (NC)	
6	supply voltage 90 ... 250 V AC	operating voltage 10 ... 30 V DC
7	supply voltage 90 ... 250 V AC	0 V DC (GND)

Connector assignment X2  
inputs

Terminal No.	Name	AC version	10 ... 30 V DC version
1	+24 VDC	Sensor Supply voltage	not connected
2	0 VDC (GND)	Reference voltage	not connected
3	INP A	Counter input A	
4	INP B	Counter input B	
5	RESET	Reset input	
6	GATE	Gate circuit	
7	KEY	Input for key locking	

Attention

In the case of selection of  $\lrcorner$  and  $\llcorner$  (inverted relay function) the function of terminals 4 and 5 are changed:

Terminal No.	AC and DC versions
4	Relay normally closed (NC)
5	Relay normally open (NO)

Release date: 2010-03-01 12:15 Date of issue: 2010-03-01 110847\_ENG.xml