

Combination

Tachogenerator and encoder in combination

Solid shaft with EURO flange B10

25...5000 pulses per revolution

TDP 0,2 + OG 9



TDP 0,2 + OG 9

Technical data - electrical ratings

Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Approval	CE

Technical data - electrical ratings (tachogenerator)

Reversal tolerance	≤0.1 %
Linearity tolerance	≤0.15 %
Temperature coefficient	±0.05 %/K (open-circuit)
Isolation class	B
Calibration tolerance	±1 %
Climatic test	Humid heat, constant (IEC 60068-2-3, Ca)
Performance	12 W (speed ≥3000 rpm)
Armature-circuit time-constant	<75 μs
Open-circuit voltage	10...150 mV per rpm

Technical data - electrical ratings (encoder)

Voltage supply	9...30 VDC 5 VDC ±5 % 9...26 VDC
Consumption w/o load	≤100 mA
Pulses per revolution	25...5000
Phase shift	90° ±20°
Scan ratio	40...60 %
Reference signal	Zero pulse, width 90°
Output frequency	≤120 kHz ≤300 kHz (on request)
Output signals	K1, K2, K0 + inverted
Output stages	HTL-P (power linedriver) TTL/RS422
Sensing method	Optical

Features

- Logic level HTL or TTL
- Low response time
- Open circuit voltage 10...150 mV per rpm
- EURO-flange B10 / solid shaft ø11 mm
- High signal quality due to patented LongLife technology
- Recognition of sense of rotation possible via control

Optional

- Housing foot (B3)

Technical data - mechanical design

Size (flange)	ø115 mm
Shaft type	ø11 mm solid shaft
Admitted shaft load	≤60 N axial ≤80 N radial
Flange	EURO flange B10
Protection DIN EN 60529	IP 55
Operating speed	≤10000 rpm
Torque	1.5 Ncm
Rotor moment of inertia	1.4 kgcm ²
Materials	Housing: aluminium die-cast Shaft: stainless steel
Operating temperature	-30...+100 °C -25...+100 °C (>3072 pulses per revolution)
Resistance	IEC 60068-2-6 Vibration 10 g, 10-2000 Hz IEC 60068-2-27 Shock 100 g, 6 ms
Connection	2x terminal box
Weight approx.	3.3 kg

Combination

Tachogenerator and encoder in combination

Solid shaft with EURO flange B10

25...5000 pulses per revolution

TDP 0,2 + OG 9

Part number

Tachogenerator with incremental encoder

TDP0,2LT- +OG9 DN

Voltage supply / signals
 I 9...30 VDC / HTL + inv. signals
 TTL 5 VDC / TTL + inv. signals
 R 9...26 VDC* (9...30 VDC*) / TTL + inv. signals

Pulse number - see table

Output signals

DN K1, K2, K0

Open-circuit voltage

- 6 10 mV per rpm
- 7 20 mV per rpm
- 10 30 mV per rpm
- 5 40 mV per rpm
- 4 60 mV per rpm
- 3 100 mV per rpm
- 1 150 mV per rpm

Pulse number

25	256	720	2048	5000
120	360	1000	2500	
128	500	1024	3072	
180	512	1250	4096	

Other pulse numbers on request.


* <95 pulses: 9...26 VDC / ≥95 pulses: 9...30 VDC

Data according to type


Type	Open-circuit voltage U_0 [mV/rpm]	Minimum load required depending on speed range [rpm]			Maximum operating speed n_{max} [rpm]	Armature resistance R_A (20°C) [Ω]	Armature inductance L_A [mH]
		0-3000 R_L [kΩ]	0-6000 R_L [kΩ]	0- n_{max} R_L [kΩ]			
TDP0,2LT-6	10	≥0.1	≥0.3	≥0.9	10000	3	6
TDP0,2LT-7	20	≥0.3	≥1.2	≥3.3	10000	11	23
TDP0,2LT-10	30	≥0.7	≥2.7	≥7.5	10000	26	50
TDP0,2LT-5	40	≥1.2	≥5	≥13.5	10000	47	90
TDP0,2LT-4	60	≥2.7	≥11	≥30	10000	99	200
TDP0,2LT-3	100	≥7.5	≥30	≥30	6000	271	550
TDP0,2LT-1	150	≥16	---	≥30	4000	630	1260

Superimposed ripple (for $\tau_{RC} = 0.7$ ms): ≤0.5% (peak-peak) ≤0.2% (rms)

Replacement switching diagram

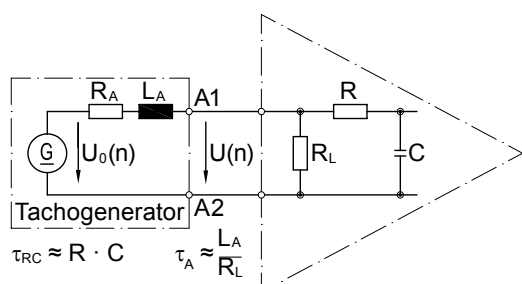

Polarity for positive rotating direction: A1: + (VDE)
 A2: - (VDE)



$$U(n) = U_0(n) \frac{R_L}{R_A + R_L} \approx U_0(n) \text{ for } R > R_L \gg R_A$$

Combination

Tachogenerator and encoder in combination


Solid shaft with EURO flange B10

25...5000 pulses per revolution

TDP 0,2 + OG 9

Dimensions

TDP 0,2 + OG 9 - Version with Euro flange (B10)

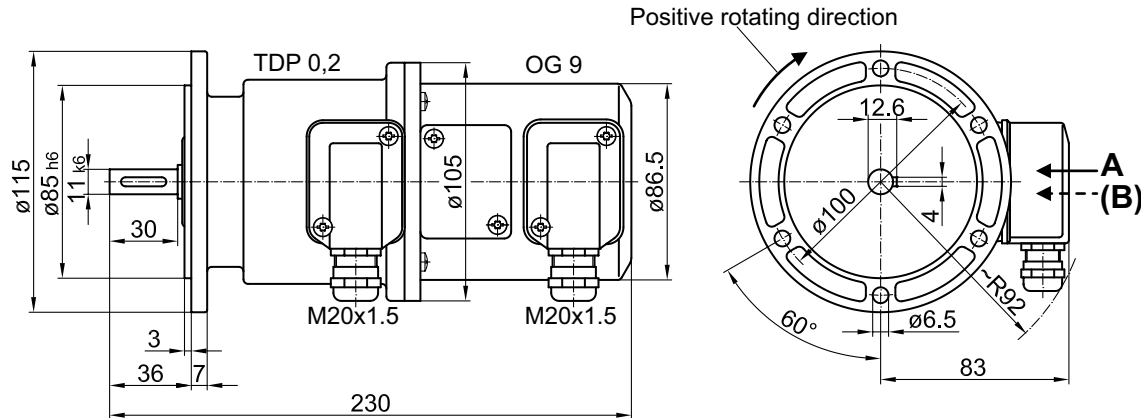

TDP 0,2 + OG 9 - Version with housing foot (B3)

