



**Model Number**



**LS611-DA-P**

Optical data coupler


**Features**

- Devices for PROFIBUS
- Identical units communicate with each other
- Problem-free light beam interruption due to TVT (Telegram Verification Technology)
- Plug connection for fast mounting
- Simple programming without opening the device
- Usable up to detection range 0
- Line indicator for signal strength

**Dimensions**

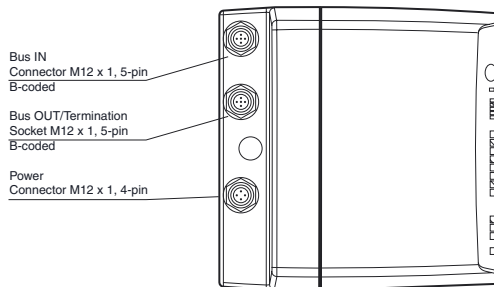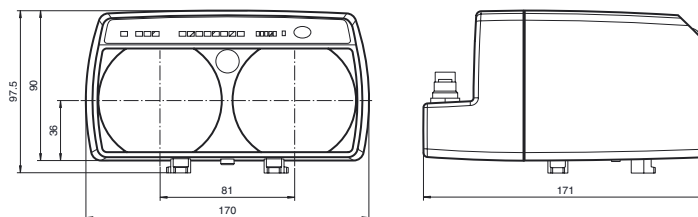

**Electrical connection**

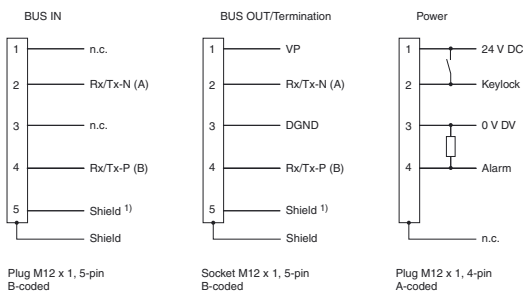

<sup>1)</sup> According to the "PROFIBUS Mounting Recommendations", the connection of the screen with Pin 5 is not recommended. If necessary, this type connection should be chosen if the contact of the screen cannot be established by screwing it to the plug housing.

Release date: 2013-08-12 14:51 Date of issue: 2013-08-16 131631\_eng.xml

**Technical data****General specifications**

Effective detection range	0 ... 150 m
Threshold detection range	200 m
Light source	IREL
Light type	modulated infrared light
Diameter of the light spot	2 m at a distance of 100 m
Angle of divergence	1.2 °
Ambient light limit	> 10000 Lux

**Functional safety related parameters**

MTTF <sub>d</sub>	240 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	0 %

**Indicators/operating means**

Data flow display	LED green: emitter LED yellow: receiver LED red: faulty telegram
Function display	alignment aid: flashing front red LED Signal strength (8 LED: Red, yellow, green) Baud rate, C1CP (collision protection)

**Electrical specifications**

Operating voltage	U <sub>B</sub>	18 ... 30 V DC
No-load supply current	I <sub>0</sub>	200 mA
Data rate		93.75/187.5/500/1500 kBit/s, adjustable
Operation frequency		8.25 MHz

**Interface**

Interface type	PROFIBUS DP-V0,-V1,-V2; FMS; MPI; FMS-DP mixed mode; galvanically isolated
----------------	--

**Input**

Function input	Keyboard disabling, digital input (current sinking), closed ON
----------------	--

**Output**

Pre-fault indication output	1 PNP (switches if there is sufficient stability control) short-circuit protected, max. 200 mA
-----------------------------	--

**Ambient conditions**

Ambient temperature	-10 ... 50 °C (14 ... 122 °F)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)

**Mechanical specifications**


Protection degree	IP65
Connection	4-pin, M12x1 connector, standard (supply), 5-pin, M12x1 connector, B-coded (Bus In), 5-pin, M12x1 socket, B-coded (Bus Out/Termination)
Material	
Housing	ABS / PC
Optical face	plastic
Mass	700 g

**Compliance with standards and directives**

Standard conformity	
Product standard	EN 60947-5-2:2007
Standards	EN 61000-6-2

**Approvals and certificates**

UL approval	cULus Listed
-------------	--------------

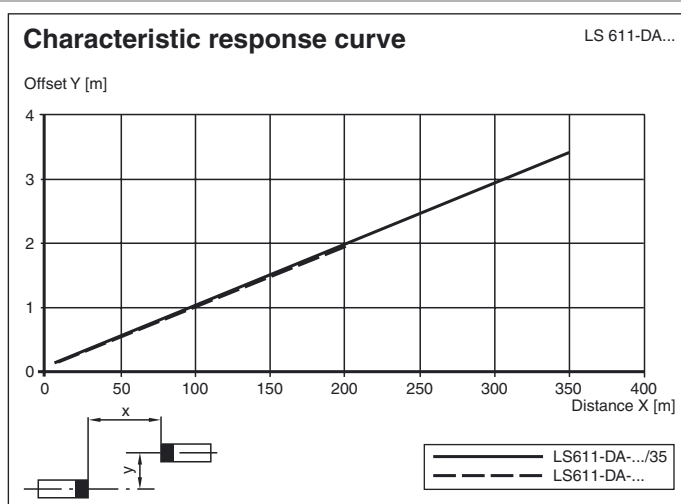**Curves/Diagrams****Accessories****OMH-LS610-05**

Mounting bracket for optical data coupler and distance measurement devices

**OMH-LS610-31**

Mounting bracket for optical data coupler and distance measurement devices

**OMH-LS610-32**

Mounting bracket for optical data coupler and distance measurement devices

**ICZ-TR-V15B**

Terminal resistor for PROFIBUS

**Schutzkappe LS610 Zubehoer**

M12 protective cap set (connector + socket) for series LS610 / LS611

**Funktionserdung LS610/VDM100 Zubehoer**

Function grounding for LS610 / LS611 / VDM100 series

**V15B-G**

Cable socket, M12, for PROFIBUS, adjustable

**V15SB-G**

Cable connector, M12, for PROFIBUS, adjustable

**OMH-LS610-01**

Mounting bracket for optical data coupler

**V15-G-PG9**

Female connector, M12, 5-pin, field attachable


**OMH-LS610-02**

Direct mounting set consisting of 4 x M4 threaded inserts

**OMH-LS610-03**

Mounting bracket with deviation mirror for optical data coupler

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

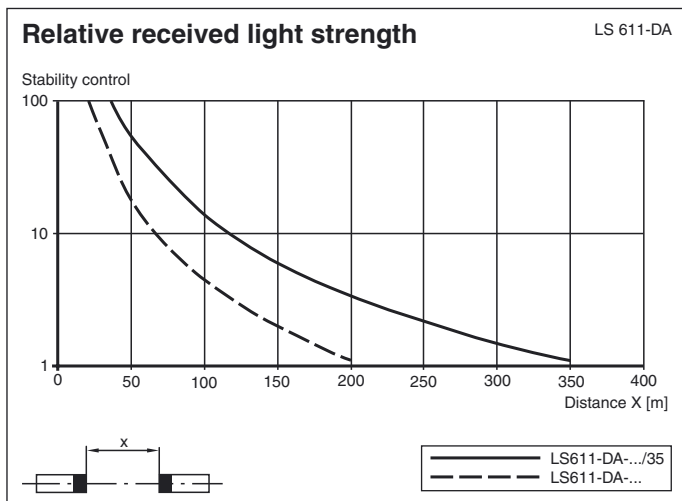

**Function**

The LS611-DA-P is a device for serial data transfer in PROFIBUS systems with transfer rates up to 1500 kbit/s and ranges up to 300 m. But the device can also be used without problem for data rates and operating ranges below these values. Two identical LS611-DA-P devices are required to create the data transfer path.

**Data transfer**

The data are transferred in both directions by means of modulated infrared light. In this process the information at the input interface is modulated on the carrier signal in real time by means of Frequency Shift Keying (FSK). The appropriate demodulation and output on the output interface takes place in the receiver.

**Function displays/Stability control**

A high-visibility alignment LED on the front of the device is provided to aid alignment. As soon as a receiver detects the light emitted from the opposite device the flashing frequency of the alignment LED reduces. By going out, the same LED finally signals that the devices are optimally aligned with each other and that there is adequate stability control. For fine adjustment, the optical data coupler is additionally provided with a bar graph display (Signal display), which provides a means of optimum adjustment.



State	weak signal	sufficient signal strength	signal with function reserve
Transmission	blocked	released	transmission with function reserve
Alignment-LED	fast flashing	slow flashing	off
Signal-indicator	red area	yellow area (at least one LED)	green area

**Operation**

The baudrate can be selected and modified by means of a push button. Operational readiness, data activity and fault signals are indicated via LEDs. The push button can be inhibited to prevent manipulation and unintentional parameter changes via an electrical signal.

**Message processing.**

In order to prevent the operation of the connected bus from malfunction in the event of the interruption of the light beam, the transfer of invalid messages is prevented. The signals are regenerated with bit and sign accuracy and sent to the bus with quartz stability. This also provides the additional effect of optimum signal processing; the signal quality is electrically and timewise identical to that of the original PROFIBUS station.

**Collision suppression**

In systems with a number of light paths, in which there are active PROFIBUS stations ("Masters", e.g. operation panels) on the moving side, a sequential fault can occur after a light path from a master has been broken, which leads to a collision with the more important master of the master terminal station (Control), resulting in the considerable disruption of the data exchange on the stationary side or even disruption of the data traffic with other light paths.

Release date: 2013-08-12 14:51 Date of issue: 2013-08-16 131631\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

In order to avoid such a collision the function C1CP (Class 1 Master Collision Protection) can be brought into the circuit on the stationary side. This prioritises the direction of transfer on this side after a light beam has become broken.

### Mounting

Mounting takes place using an appropriate accessory, e.g. OMH-LS610-01 for wall mounting.

The x-y positioning is set prior to delivery. The device is secured in the desired beam direction ( $\pm 90^\circ$  rotation is possible) on the support bracket.