

**Features**

- 1-channel signal conditioner
- 24 V DC supply (Power Rail)
- Strain gauge input (full or half bridge)
- Output 0 mA ... ± 20 mA or 0 V ... ± 10 V
- Relay contact output
- Programmable high/low alarm
- Configurable by PACTware or keypad
- RS 485 interface
- Line fault detection (LFD)

**Function**

This signal conditioner provides the isolation for non-intrinsically safe applications.

The device is used with strain gauges, load cells and resistance measuring bridges.

Designed to provide 5 V excitation voltage, this barrier's high quality A/D converter allows it to be used with those devices requiring 10 V.

Up to four 350 Ω strain gauges connected in parallel may be powered and evaluated.


The device is easily configured by the use of keypad or with the PACTware configuration software.

The current measurement for tare, zero point, and final value can be entered in this manner.


A fault is signaled by LEDs acc. to NAMUR NE44 and a separate collective error message output.

For additional information, refer to the manual and [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

**Assembly**

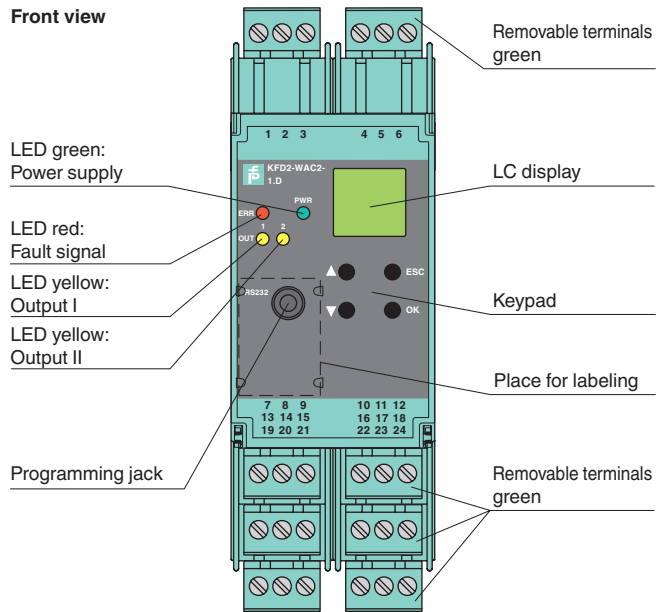

**Connection**

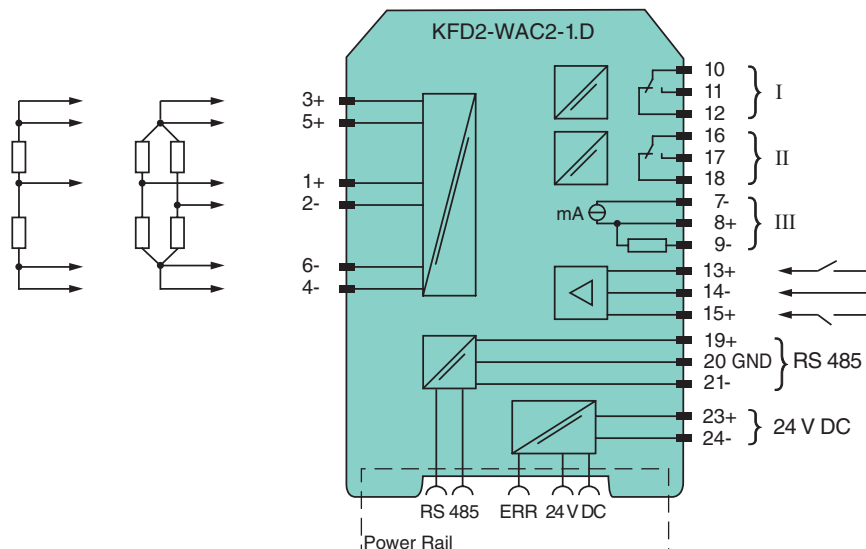

Release date 2015-03-11 10:01 Date of issue 2015-03-11 231223\_eng.xml

<b>General specifications</b>	
Signal type	Analog input
<b>Supply</b>	
Connection	Power Rail or terminals 23+, 24-
Rated voltage	$U_n$ 20 ... 35 V DC
Ripple	within the supply tolerance
Power consumption	≤ 3 W
<b>Interface</b>	
Connection	Power Rail or terminals 19+, 20 GND, 21-
Type	RS-485
Programming interface	RS 232 programming jack
<b>Field circuit</b>	
Connection	terminals 1+, 2-, 3+, 4-, 5+, 6-
Lead resistance	≤ 25 Ω per lead
<b>Input I</b>	
Connection	terminals 1+, 2-
Sensor supply	1 ... 5 V
Connection	terminals 3+, 4- (supply); 5+, 6- (signal)
Short-circuit current	50 mA
Load	≥ 116 Ω up to 5V, ≥ 85 Ω up to 4V
<b>Input</b>	
Connection	Input I: terminals 1+, 2-; Input II: terminals 13+, 14-; Input III: terminals 15+, 14-
Programmable Tare	0 ... 500 % of span
<b>Input I</b>	
Input signal	-100 ... 100 mV
Input resistance	> 1 MΩ for voltage measurement
<b>Input II, III</b>	
Open circuit voltage/short-circuit current	18 V / 5 mA
Active/Passive	I > 4 mA / I < 1.5 mA
<b>Output</b>	
Connection	Output I: terminals 10, 11, 12; Output II: terminals 16, 17, 18; Output III: terminals 7-, 8+, 9-
<b>Output I, II</b>	
Contact loading	253 V AC/2 A/500 VA/cos φ min. 0.7; 40 V DC/2 A resistive load
Mechanical life	2 x 10 <sup>7</sup> switching cycles
<b>Output III</b>	
Current range	-20 ... 20 mA
Load	≤ 550 Ω
Analog voltage output	0 ... ± 10 V; output resistance 500 Ω (bridge between terminal 7 and 9)
Analog current output	0 ... ± 20 mA or 4 ... 20 mA; load 0 ... 550 Ω (terminals 7 and 8)
Line fault detection	downscale -21.5 mA (-10.75 V) or 2 mA (1 V), upscale 21.5 mA (10.75 V)
Collective error message	Power Rail
<b>Transfer characteristics</b>	
<b>Deviation</b>	
Resolution/accuracy	≤ ± 0.05 % incl. non-linearity and hysteresis
Temperature effect	≤ ± 0.01 %/K
Reaction time	300 ... 850 ms
<b>Electrical isolation</b>	
Input I/other circuits	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output I, II against each other	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output I, II/other circuits	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output III/Input II, III	not available
Output III/Programming socket	not available
Other circuits from each other	functional insulation, rated insulation voltage 50 V <sub>eff</sub>
<b>Directive conformity</b>	
<b>Electromagnetic compatibility</b>	
Directive 2004/108/EC	EN 61326-1:2006
<b>Low voltage</b>	
Directive 2006/95/EC	EN 61010-1:2010
<b>Conformity</b>	
Electromagnetic compatibility	NE 21:2006
Degree of protection	IEC 60529:2001
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>	

Release date 2015-03-11 10:01 Date of issue 2015-03-11 231223\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

Degree of protection	IP20
Mass	approx. 250 g
Dimensions	40 x 119 x 115 mm (1.6 x 4.7 x 4.5 in) , housing type C3
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>General information</b>	
Supplementary information	Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

## Supplementary information

Single or parallel connection of strain gauges with resulting resistance between 116  $\Omega$  ... 10 k $\Omega$  can be connected and will provide a 4 mA ... 20 mA output and 2 relay outputs as well as an RS 485 interface in the safe area.

The device supports the transmission of measured values via the RS 485 interface. In this mode of operation, input signal range may be transmitted with 26 Bit resolution with up to 31 signal converters connected to the Power Rail UPR-05 or via terminals 19, 20 and 21.

RS 485 communication may be done via the Power Rail when using power feed modules with bus access, e. g. KFD2-EB2.R4A.B or via the terminals 19, 20 and 21 of one module. The device is addressed via keypad and display or with a PC with PACTware and adapter K-ADP-USB.

For additional information, refer to the manual and [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

## Accessories

### Power feed module KFD2-EB2

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. A galvanically isolated mechanical contact uses the Power Rail to transmit collective error messages.

### Power Rail UPR-05

The Power Rail UPR-05 is a complete unit consisting of the electrical inset and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

### Profile Rail K-DUCT with Power Rail

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



*Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!*