



Model Number

LGS8 Serie

Light grid

with fixed cable with 4-pin, M12 x 1 connector, and fixed cable with 8-pin, M12 x 1, connector

Features


- Automation light grid
- Optical resolution 8 mm
- Super-fast object detection, even with 3-way beam crossover
- Software-free adjustment of height monitoring
- Object identification using integrated object recognition
- IO-link interface for service and process data
- Optional temperature range to -30 °C

Product information


The LGS automation light grid series detects objects ranging in size from small to large. The very slender light grids have a modular design and come in different beam spacings and field heights. All signal evaluation takes place inside the unit. The lightweight systems can be integrated in their surroundings in a well-designed configuration, which means that machines and plants in temperature ranges between -30 °C ... +60 °C can be designed more compactly.

Dimensions

Transmitter

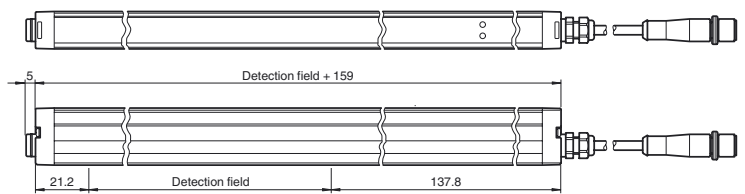


Receiver

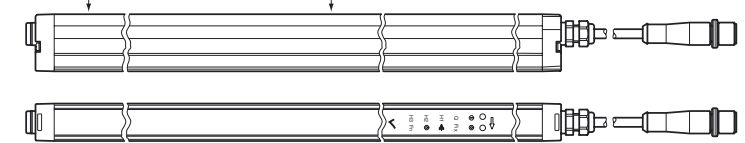


Electrical connection


Transmitter




Receiver

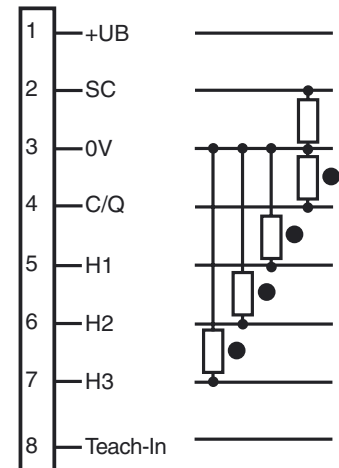

Pinout



Indicators/operating means



1	Menu button	yellow	7	Height checking 3	yellow
2	Operating indicator	green	8	Object floating	yellow
3	Status display	yellow	9	Crossing	yellow
4	Q object	yellow	10	Peripheral beam tolerance	yellow
5	Height checking 1	yellow	11	2nd level	yellow
6	Height checking 2	yellow	12	OK button	yellow

2nd level: Beam collimation, inverse mode, light-on/dark-on switching, reset factory setting, signal tracking

Technical data**General specifications**

Effective detection range	Standard : 0.3 ... 6 m Option /35: 0.5 ... 8 m
Threshold detection range	Standard : 7.5 m Option /35: 10 m
Light source	IREL
Light type	modulated infrared light , 850 nm
Field height	see Table 1, max. 2100 mm
Beam crossover	Factory setting: three beam crossing, deactivateable
Beam blanking	adjustable max. 2 fixed suppressible beam areas (blanking)
Beam spacing	8.33 mm
Number of beams	see Table 1, max. 253
Operating mode	Emitter: Emitter power adjustable in two ranges
Optical resolution	without beam crossover: 8 mm with beam crossover: 4 mm with in 25% and 75% of the range
Angle of divergence	10 °
Ambient light limit	> 50000 Lux (if external light source is outside the opening angle)

Functional safety related parameters

MTTF _d	21 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	60 %

Indicators/operating means

Operation indicator	Power on: LED green, statically lit , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz)
Function indicator	Emitter: Yellow LED, illuminates at high emitting power, off at low emitting power Receiver: Yellow LED: illuminates when an object is detected flashes when falling short of the stability control (4 Hz) Error message: Yellow LED flashes (8 Hz) in emitter and receiver
Control elements	Receiver: 2 touch buttons for programming
Parameterization indicator	IO link communication: green LED goes out briefly (1 Hz)

Electrical specifications

Operating voltage	U _B	18 ... 30 V DC
Ripple		10 %
No-load supply current	I ₀	Emitter ≤: 50 mA Receiver: ≤ 150 mA (without outputs)
Time delay before availability	t _v	see Table 1, max. 3.8 s

Interface

Interface type	IO-Link
Protocol	IO-Link V1.0
Mode	COM 2 (38.4 kBaud)

Input

Test input	Emitter switch-off with +UB or 0 V at pin 4 (emitter)
Function input	Range input activation from 1.6 m (or 2 m in case of option /35) with +UB or 0 V on pin 2 (emitter) Teach-In input for programming on pin 8 (receiver)

Output

Pre-fault indication output	Stability Control (SC) 1 PNP, short-circuit protected, reverse polarity protected on pin 2 (receiver)
Switching type	Factory setting: dark ON , Switchable to light ON mode
Signal output	Switch output (detection field C/Q) 1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected on pin 4 (receiver), Height monitoring (H1, H2, H3) 3 push-pull (4 in 1) outputs, short-circuit proof, reverse polarity protected on pin 5, pin 6, pin 7 (receiver)
Switching threshold	Factory setting: The signal tracking for the threshold value is deactivated, increasing the optical resolution by a maximum of 4 mm; switchable to active signal tracking
Switching voltage	max. 30 V DC
Switching current	max. 100 mA
Voltage drop	U _d ≤ 2 V DC
Switching frequency	f see Table 1, max. 118 Hz
Response time	see Table 1, max. 20 ms
Timer function	Off-delay programmable from 0 ... 1.25 s in 5 ms steps (adjustment via IO-Link only)

Ambient conditions

Ambient temperature	Standard : -10 ... 60 °C (14 ... 140 °F) Option /146: -30 ... 60 °C (-22 ... 140 °F)
Storage temperature	-30 ... 70 °C (-22 ... 158 °F)

Mechanical specifications

Housing length L	see Table 1, max. 2260 mm
Degree of protection	IP67

Accessories**OMH-LGS-01**

Attachment aid for light grid series LGS/LGM

OMH-SLCT-01

Quick clamp and adjustment system

V19-G-EMV-BK0,3M-PVC-V19-G

Double-ended cordset, M12 to M12, with EMC filter, 8-pin, PVC cable

OMH-SLCT-06

Swivel Bracket

OMH-SLCT-03

Mounting bracket including adjustment

OMH-SLCT-04

Mounting bracket including adjustment (with loose bearing)

OMH-SLCT-05

Mounting bracket including adjustment

AA SLCT-01

Profile alignment aid; simplified alignment of the SLCS and SLCT safety light curtains

V1-G-BK2M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V1-G-BK5M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V1-G-BK10M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V1-G-BK15M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V19-G-BK10M-PUR-IEC

Female cordset, M12, 8-pin, PUR-cable

V19-G-BK2M-PUR-IEC

Female cordset, M12, 8-pin, PUR-cable

V19-G-BK5M-PUR-IEC

Female cordset, M12, 8-pin, PUR-cable

V19-G-BK2M-PUR-U-V1-G

Connection cable, M12 to M12, 8/4-pin, PUR cable

IO-Link-Master02-USB

IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection

IO-Link-Master-USB DTM

Communication DTM for use of IO-Link-Master

PACTware 4.X

FDT Framework

IODD Interpreter DTM

Software for the integration of IODDs in a frame application (e. g. PACTware)

LGS-Serie IODD

IODD for communication with LGS-IO-Link sensors

Other suitable accessories can be found at www.pepperl-fuchs.com

Connection Emitter: 200 mm connecting cable with 4-pin, M12x1 connector
Receiver: 200 mm connecting cable with 8-pin, M12 x 1 connector
Cable cross section min. 0.25 mm²
Max. cable length 30 m

Material
Housing extruded aluminum section , Silver anodized
Optical face Plastic pane , Polycarbonate
Mass see Table 1, max. 1200 g (per profile)


Compliance with standards and directives

Directive conformity
EMC Directive 2004/108/EC EN 60947-5-2:2007
Standard conformity
Product standard EN 60947-5-2:2007
IEC 60947-5-2:2007

Approvals and certificates

Protection class III (IEC 61140)
UL approval cULus Listed
CCC approval CCC approval / marking not required for products rated ≤36 V

Curves/Diagrams

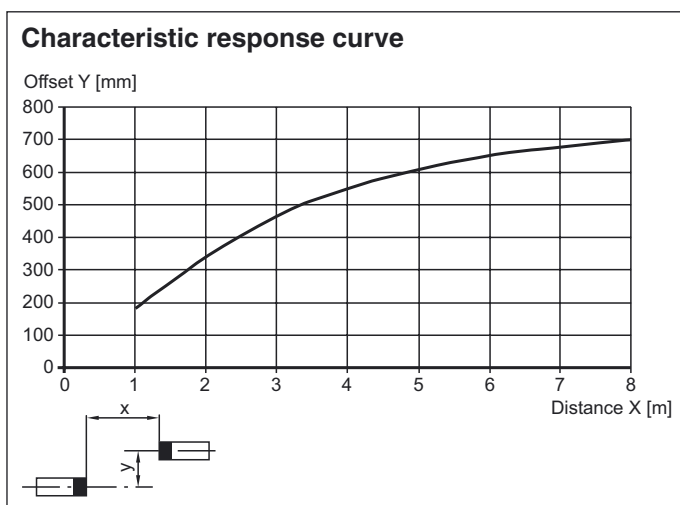

Additional information

Table 1:

Switch-on delay, maximum switching frequency and maximum time delay before availability:

Field height [mm]	Switch-on delay Q [ms] without object parameterization		Switch-on delay Q [ms] with object parameterization, HQn outputs		Max. switching frequency [Hz]	Max. time delay before availability t_v [s]
	typ.	max.	typ.	max.		
100	3	5	5	7	118	0.9
200	3	5	6	9	101	1.0
300	3	6	7	10	88	1.2
400	4	7	7	12	78	1.3
500	4	8	8	13	70	1.5
600	5	8	9	15	63	1.6
700	5	9	10	16	58	1.8
800	5	10	10	18	53	1.9
900	6	11	11	19	49	2.0
1000	6	11	12	21	46	2.2
1100	6	12	13	22	43	2.3
1200	7	13	13	24	41	2.5
1300	7	14	14	25	38	2.6
1400	8	14	15	27	36	2.8
1500	8	15	16	28	35	2.9
1600	8	16	16	30	33	3.0
1700	9	17	17	31	31	3.2
1800	9	17	18	33	30	3.3
1900	9	18	19	34	29	3.5
2000	10	19	19	36	28	3.6
2100	10	20	20	37	27	3.8

Release date: 2015-02-26 15:08 Date of issue: 2015-02-26 232504_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

Number of beams, housing length and weight:

Field height [mm]	Number of beams	Overall length of the transmitter/receiver unit [mm]	Weight of the transmitter/receiver unit [g]
100	13	260	200
200	25	360	250
300	37	460	300
400	49	560	350
500	61	660	400
600	73	760	450
700	85	860	500
800	97	960	550
900	109	1060	600
1000	121	1160	650
1100	133	1260	700
1200	145	1360	750
1300	157	1460	800
1400	169	1560	850
1500	181	1660	900
1600	193	1760	950
1700	205	1860	1000
1800	217	1960	1050
1900	229	2060	1100
2000	241	2160	1150
2100	253	2260	1200

Design and function**Safety information**

The device must only be operated with Safety Extra Low Voltage (SELV) with safe electrical disconnection. Intervention and repairs must only be carried out by your suppliers.

The system must be serviced and checked regularly.

A clean, soft cloth can be used for cleaning. Aggressive, abrasive cleaning agents that damage the surface must be avoided. The device must not be subjected to hard knocks or vibration.

Commissioning

Prerequisites

- The transmitter and receiver must be installed and aligned correctly.
- The electrical connection must be established according to the connection diagram.
- The signal output must respond to object detection.
- If at least one light beam is interrupted, the output remains active as long as the object is detected.

Fault location

- Measure operating voltage
- Check the cabling.
- Check the transmitter and receiver for dirt and clean if necessary.

Function displays

Behind the optics cover on the connection side of the profiles there is a green Power ON operating indicator LED and a yellow status display LED.

Transmitter

Function	Diagnostic description
Green operating indicator LED lights up statically	Power-On
Green operating indicator LED is dark and yellow status indicator flashes	Power save mode
Yellow status indicator LED is dark	Transmitter with low transmitting power
Yellow status indicator LED lights up statically	Transmitter with high transmitting power
Yellow status indicator LED flashes quickly (approx. 8 Hz)	Error condition
Yellow status indicator LED light changes for short time	Test input is activated

Receiver

Function	Diagnostic description
Green operating indicator LED lights up statically	Power-On
Green operating indicator LED is dark	Power save mode

Function	Diagnostic description
Green operating indicator LED flashes with brief interruption	IO-Link mode active, parameterisation only possible via IO-Link
Green operating indicator LED flashes (4 Hz)	Error condition: Short circuit at the outputs
Yellow status indicator LED lights up statically	Detection field interrupted
Yellow status indicator LED is dark	Detection field is enabled.
Yellow status indicator LED flashes (approx. 4 Hz)	Insufficient function reserve
Yellow status indicator LED flashes quickly (approx. 8 Hz)	Error condition: Incorrect signal measurement


Resolution and beam clearance

The mechanical beam clearance determines the smallest detectable object size. Crossing the light beams increases the resolution of the light grid.

The devices are delivered without programmed height checking. The beam is crossed three times.

Resolution of the crossed beam arrangement

If three-way crossing of the beams is programmed, the resolution increases. For a three-way crossing, this means that the increased resolution is offered after 25% of the transmitter range or receiver range. It must therefore be ensured that all objects pass transmitters or receivers with this clearance.

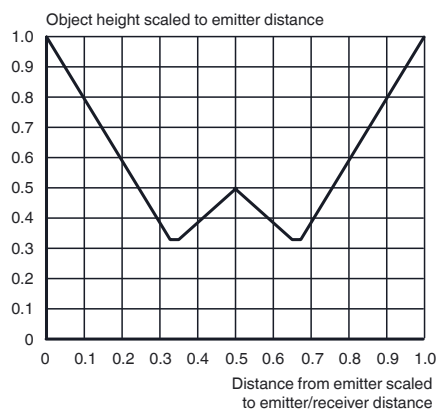

Model number

L	G	S	x	x	x	-	y	y	y	y	-	IO	/	z	z	z
---	---	---	---	---	---	---	---	---	---	---	---	----	---	---	---	---

Resolution [mm]

(8 mm; 17 mm; 25 mm; 50 mm; 100 mm)

Detection field [mm]

(min. 100 mm ... max. 3200 mm -> see technical data)

IO-Link-interface

Options

- /35 extended detection range 8 m
- /110 Push-pull output, switch output 0.1 A, short-circuit protected, reverse polarity protection
- /115b with 0.2 m fixed cable and M12 connector
- /146 extended temperature range -30 °C