

**Features**

- 1-channel signal conditioner
- 24 V DC supply (Power Rail)
- Dry contact or NAMUR inputs
- Usable as signal splitter (1 input and 2 outputs)
- Relay contact output
- Fault relay contact output
- Line fault detection (LFD)
- Housing width 12.5 mm
- Connection via spring terminals
- Up to SIL2 acc. to IEC 61508

**Function**

This signal conditioner transfers digital signals (NAMUR sensors/mechanical contacts) from the field to the control system.


The proximity sensor or switch controls a form A normally open relay contact for the load. The normal output state is reversed using switch S1. Switch S2 allows output II to be switched between a signal output and an error message output. Switch S3 enables or disables line fault detection of the field circuit.

During an error condition, relays revert to their de-energized state and LEDs indicate the fault according to NAMUR NE44.

A unique collective error messaging feature is available when used with the Power Rail system.

Due to its compact housing design and low heat dissipation, this device is useful for detecting positions, end stops, and switching states in space-critical applications.


**Assembly**

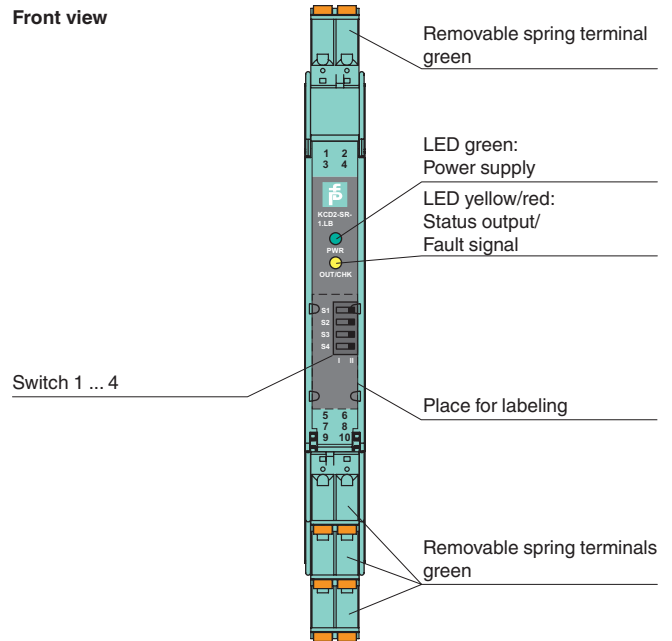

CE

SIL2

**Connection**

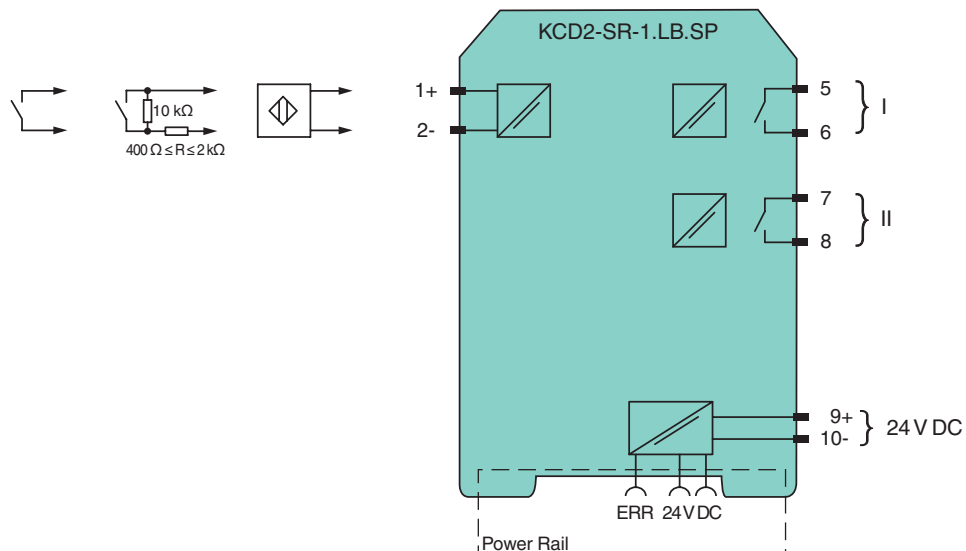


Release date 2012-12-07 16:05 Date of issue 2015-02-16 240652\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

|  |   |
|--|---|
| <b>General specifications</b>              |   |
| Signal type                                | Digital Input   |
| <b>Supply</b>                              |   |
| Connection                                 | Power Rail or terminals 9+, 10-   |
| Rated voltage $U_n$                        | 19 ... 30 V DC  |
| Ripple                                     | ≤ 10 %  |
| Rated current $I_n$                        | ≤ 30 mA   |
| Power loss                                 | ≤ 500 mW  |
| Power consumption                          | ≤ 500 mW  |
| <b>Input</b>                               |   |
| Connection                                 | terminals 1+, 2-  |
| Rated values                               | acc. to EN 60947-5-6 (NAMUR)  |
| Open circuit voltage/short-circuit current | approx. 10 V DC / approx. 8 mA  |
| Switching point/switching hysteresis       | 1.2 ... 2.1 mA / approx. 0.2 mA   |
| Line fault detection                       | breakage I ≤ 0.1 mA , short-circuit I ≥ 6.5 mA  |
| Pulse/Pause ratio                          | ≥ 20 ms / ≥ 20 ms   |
| <b>Output</b>                              |   |
| Safety note                                | If load voltage > 50 V, de-energize before removing the terminals.  |
| Connection                                 | output I: terminals 5, 6 ; output II: terminals 7, 8  |
| Output I                                   | signal ; relay  |
| Output II                                  | signal or error message ; relay   |
| Contact loading                            | 253 V AC/2 A/cos φ > 0.7; 126.5 V AC/4 A/cos φ > 0.7; 30 V DC/2 A resistive load  |
| Minimum switch current                     | 2 mA / 24 V DC  |
| Energized/De-energized delay               | ≤ 20 ms / ≤ 20 ms   |
| Mechanical life                            | 10 <sup>7</sup> switching cycles  |
| <b>Transfer characteristics</b>            |   |
| Switching frequency                        | ≤ 10 Hz   |
| <b>Electrical isolation</b>                |   |
| Input/Output                               | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub>   |
| Input/power supply                         | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub>   |
| Output/power supply                        | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub>   |
| Output/Output                              | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub>   |
| <b>Directive conformity</b>                |   |
| Electromagnetic compatibility              |   |
| Directive 2004/108/EC                      | EN 61326-1:2006   |
| Low voltage                                |   |
| Directive 2006/95/EC                       | EN 61010-1:2010   |
| <b>Conformity</b>                          |   |
| Electromagnetic compatibility              | NE 21   |
| Degree of protection                       | IEC 60529   |
| <b>Ambient conditions</b>                  |   |
| Ambient temperature                        | -20 ... 60 °C (-4 ... 140 °F)   |
| <b>Mechanical specifications</b>           |   |
| Degree of protection                       | IP20  |
| Mass                                       | approx. 100 g   |
| Dimensions                                 | 12.5 x 114 x 119 mm (0.5 x 4.5 x 4.7 in) , housing type A2  |
| Mounting                                   | on 35 mm DIN mounting rail acc. to EN 60715:2001  |
| <b>General information</b>                 |   |
| Supplementary information                  | Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> . |

Release date 2012-12-07 16:05 Date of issue 2015-02-16 240652\_eng.xml

**Configuration**

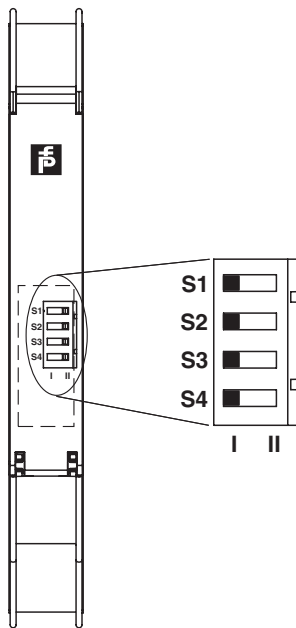

**Switch position**


| S | Function   |  | Position |
|---|--|--|----------|
| 1 | Mode of operation<br>Output I (relay)<br>energized | with high input current                        | I        |
|   |  | with low input current                         | II       |
| 2 | Assignment<br>Output II (relay)                    | switching state like relay I                   | I        |
|   |  | fault signal output<br>(de-energized if fault) | II       |
| 3 | Line fault detection                               | ON   | I        |
|   |  | OFF  | II       |
| 4 | no function  |  |          |

**Operating status**

| Control circuit                             | Input signal       |
|---|--------------------|
| Initiator high impedance/<br>contact opened | low input current  |
| Initiator low impedance/<br>contact closed  | high input current |
| Lead breakage,<br>lead short-circuit        | Line fault         |

Factory settings: switch 1, 2, 3 and 4 in position I

**Maximum switching power of output contacts**

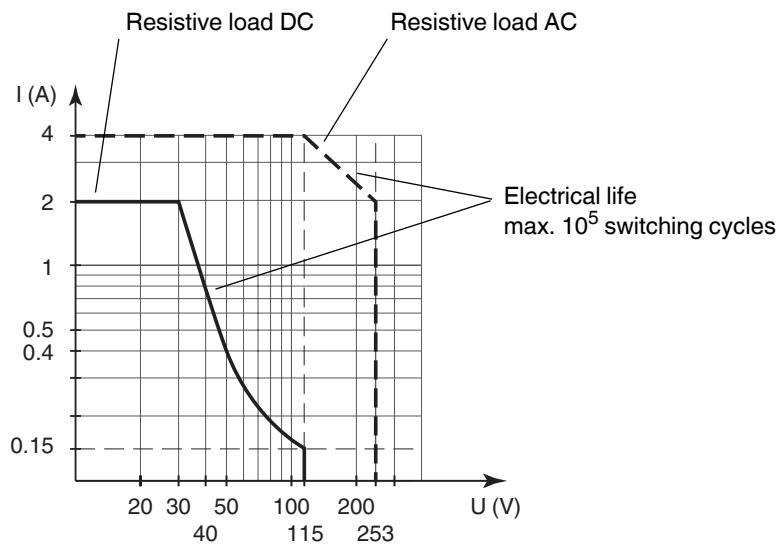

The maximum number of switching cycles is depending on the electrical load and may be higher when reduced currents and voltages are applied.

Release date 2012-12-07 16:05 Date of issue 2015-02-16 240652\_eng.xml

## Accessories

### Power feed module KFD2-EB2

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. Collective error messages received from the Power Rail activate a galvanically-isolated mechanical contact.

### Power Rail UPR-03

The Power Rail UPR-03 is a complete unit consisting of the electrical insert and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

### Profile Rail K-DUCT with Power Rail

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



*Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!*