

Ferrule fuses



Table of Contents

Basic Catalog Number	Volts	Amp Range	Page
FWA	150	5 60	197 198
FWX	250	1 50	199 200
FWH	500	0.25 30	201 204
FWC	600	6 32	205 206
FWP	690V/700	1 100	207 210
FWK	750	5 60	211 212
FWJ	1000	20 30	213 214
FWL/FWS	1250/1500/2000	2 30	215

Accessories

Fuse Holders	216
--------------	-----

Ferrule Fuse Ranges

Volts	Amps	AC	DC
150	5 60	X	X
250	1 50	X	X
500	0.25 30	X	X
600	6 32	X	X
700 (22 x 58mm)	20 100	X	
700 (14 x 51mm)	1 50	X	X
750	5 60	X	X
1000	20 30	X	X (800Vdc)
1250	20 30	X	X (1000Vdc)
1500	8 15	X	X (1000Vdc)
2000	2 6	X	X (1000Vdc)

General Information

Cooper Bussmann offers a full line of ferrule style (cylindrical clip-mounted) fuses, designed and tested to meet standards and requirements in various locations around the world.

Their unique design and construction provide:

- Superior cycling capability
- Low energy let-through (I²t)

Ferrule fuses provide an excellent solution for small UPS, small ac drives and other low power applications where space is at a premium.

Voltage Rating

All Cooper Bussmann ferrule fuses — except 690V — have been tested at their rated voltage. The 690V ferrule fuse has been tested to the IEC 60269 standard, which requires clearing at the rated voltage +5%.

Accessories

Ferrule fuses may be mounted in fuseclips, fuse holders, fuse blocks or fused switches. A variety of products are available. Please consult Cooper Bussmann Application Engineering to discuss your requirement.

Ferrule — FWA 150V: 5-60A

**FWA 5-30A (10 x 38mm)
35-60A (21 X 51mm)**

Specifications

Description: Ferrule style high speed fuses.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 150Vac/dc

Amps: — 5-60A


IR: — 100kA Sym.

Agency Information: CE, UL Recognition

Electrical Characteristics


Total Clearing I²t

The total clearing I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (rms).

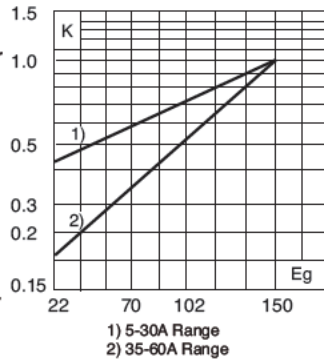


Dimensions - in (mm)

Amp Range	Dimensions		
	A	B	C
5 30	1.5 (38.1)	0.375 (9.5)	0.406 (10.3)
35 60	2.0 (50.8)	0.625 (15.9)	0.811 (20.6)

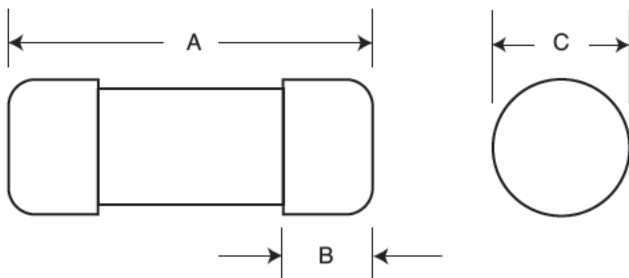


Arc Voltage

This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (rms) at a power factor of 15%.

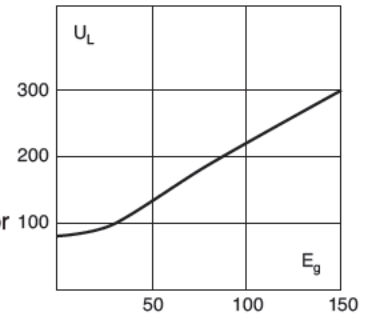

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in % of the rated current.

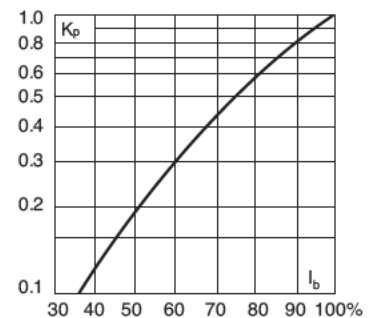

Catalog Numbers

Catalog Numbers	Size	Electrical Characteristics			
		Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss
			Pre-arc	Clearing at 150V	
FWA 5A10F	10 x 38mm (³ / ₁₆ " x 1 ¹ / ₂ ")	5	1.6	8	1
FWA 10A10F		10	3.6	16	2.7
FWA 15A10F		15	14	55	3.3
FWA 20A10F		20	33	130	3.8
FWA 25A10F		25	58	220	4.9
FWA 30A10F		30	100	400	4.9
FWA 35A21F	21 x 51mm (¹³ / ₁₆ " x 2")	35	75	800	4.5
FWA 40A21F		40	100	1000	5.1
FWA 45A21F		45	130	1300	6
FWA 50A21F		50	170	1600	7.3
FWA 60A21F		60	250	2400	8.0

*Watts loss provided at rated current.
*See accessories on page 216.

Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

Ferrule — FWA 150V: 5-60A


FWA 5-30A: 150V (10 x 38mm)

Time-Current Curve

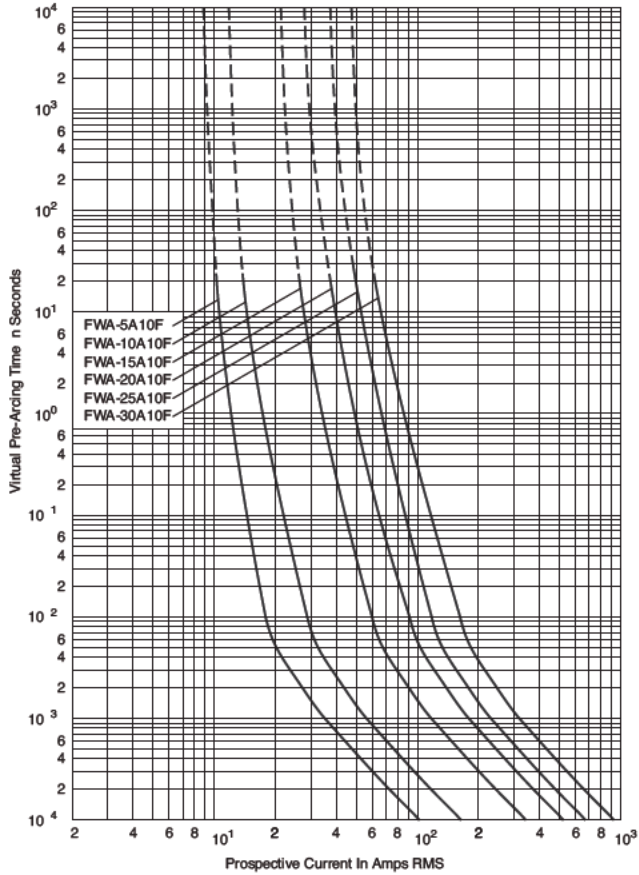


FWA 35-60A: 150V (21 x 51mm)


Time-Current Curve

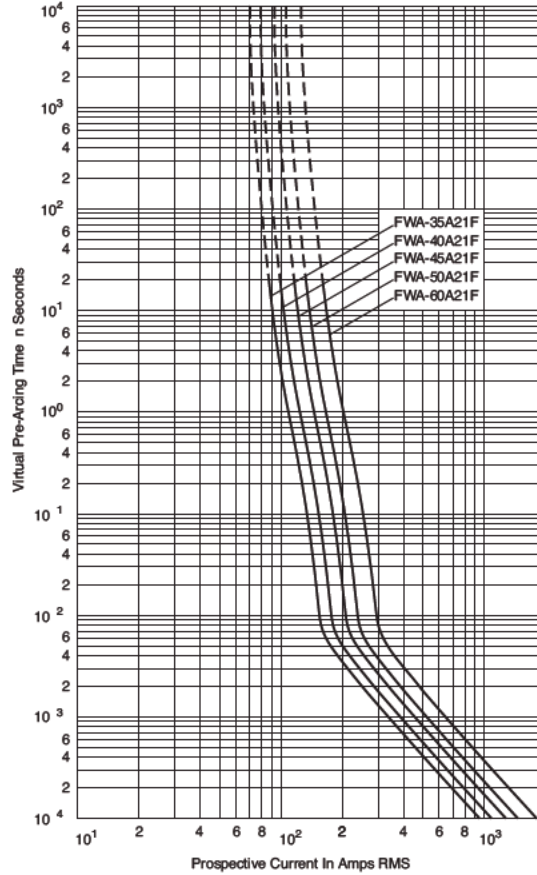

Peak Let-Through Curve

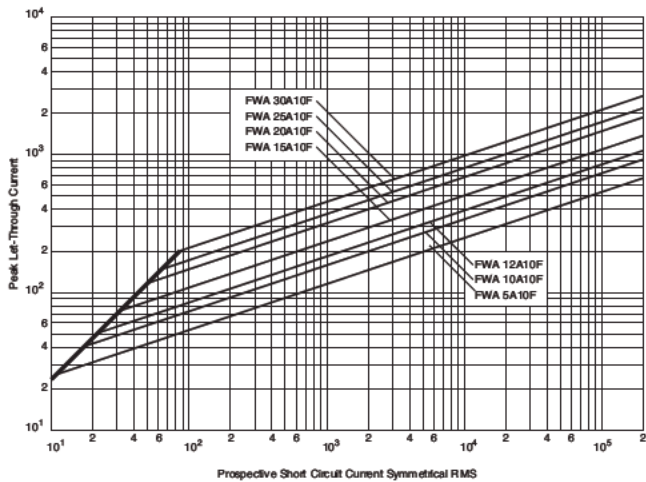

Peak Let-Through Curve

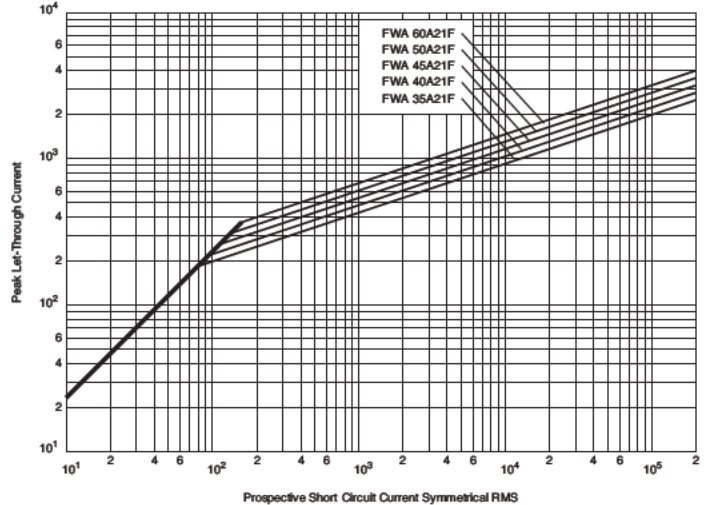

Data Sheet: 35785317

Data Sheet: 35785305

Ferrule — FWX 250V (UL): 1-50A

FWX (14 x 51mm)

Specifications

Description: Ferrule style high speed fuses.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 250Vac/dc

Amps: — 1-50A

IR: — 200kA RMS Sym.

— 50kA @ 250Vdc


Agency Information: CE, UL Recognition 1-50A & CSA
Component Acceptance: 5-30A

Electrical


Characteristics

Total Clearing I²t

The total clearing I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (rms).




Dimensions - mm (inches)

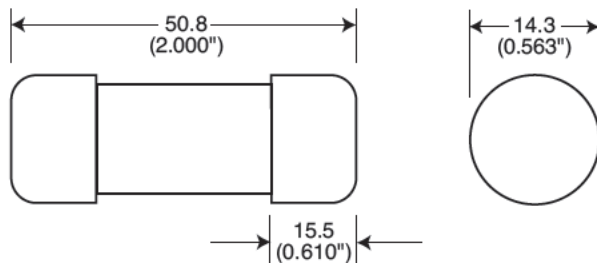


Arc Voltage

This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (rms) at a power factor of 15%.

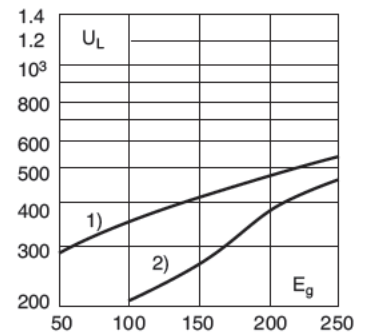

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in % of the rated current.

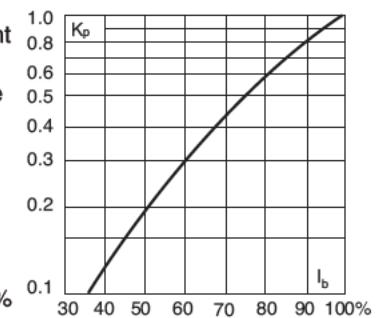

Catalog Numbers

Catalog Number	Size	Electrical Characteristics			
		Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss
			Pre-arc	Clearing at 250V	
FWX 1A14F	14 x 51mm (% ^o x 2")	1			
FWX 2A14F		2			
FWX 3A14F		3			
FWX 4A14F		4			
FWX 5A14F		5	1.6	13	1.3
FWX 10A14F		10	3.6	24	3.4
FWX 15A14F		15	14	83	3.8
FWX 20A14F		20	33	200	4.6
FWX 25A14F		25	58	300	5.3
FWX 30A14F		30	100	500	5.9
FWX 50A14F	50	200	1800	5.7	

• Watts loss provided at rated current.
• (250Vdc/Interrupting rating 50kA) UL Recognition & CSA Component Acceptance on 5 through 30A only. Consult Cooper Bussmann for additional ratings.
• See accessories on page 216.

Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters


Ferrule — FWX 250V (UL): 1-50A

FWX 1-30A: 250V (14 x 51mm)

Time-Current Curve

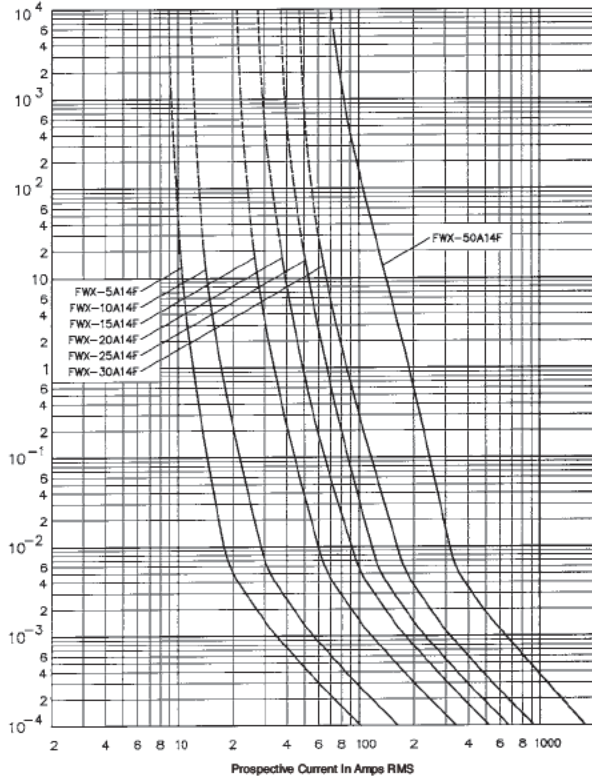

Peak Let-Through Curve

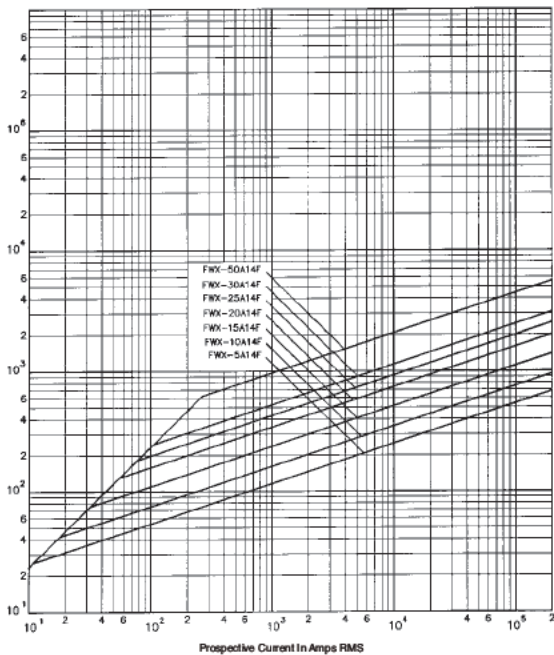

Ferrule — FWH 500V: 0.25-30A

FWH (6 x 32mm)

Specifications

Description: Ferrule style high speed fuses.

Dimensions: See dimensions illustrations.

Ratings:

Volts: — 500Vac

Amps: — 0.25-30A

IR: — 50kA at $\geq 20\%$ pf (0.25-20A)

— 20kA at $\geq 20\%$ pf (25-30A)

Agency Information: CE, UL Recognition 0.25-30A, CSA

Component Acceptance: 0.25-7A

Opening Times

Amp Ratings	150%	200%	300%
0.25 7	> 30 min	< 30 min	≤ 10 sec
10 30	< 30 min	< 30 min	≤ 10 sec



Catalog Numbers

Catalog Numbers	Size	Electrical Characteristics			
		Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss
			Pre-arc	Clearing at 500V	
FWH .250A6F	6 x 32mm ($\frac{1}{8}$ " x $1\frac{1}{4}$ ")	0.25*	0.01	0.05	2.7
FWH .500A6F		0.5*	0.05	0.25	1.2
FWH 001A6F		1*	0.4	2	1.7
FWH 002A6F		2*	1.3	3.5	3.2
FWH 3.15A6F		3.15*	3.1	7.7	2.9
FWH 005A6F		5*	15	40	2.1
FWH 6.30A6F		6.3*	36	90	2.3
FWH 007A6F		7*	50	125	2.5
FWH 010A6F		10**	9.9	139	2.86
FWH 12.5A6F		12.5**	20	60	3.53
FWH 015A6F		15**	44	146	3.08
FWH 016A6F		16**	48	177	4.48
FWH 020A6F		20**	75	259	4.26
FWH 025A6F		25**	126	345	
FWH 030A6F	30**	145	430		

*300% minimum opening current at rated voltage.


**200% minimum opening current at rated voltage.

• Consult Cooper Bussmann for DC ratings.

• See accessories on page 216.

High Speed Fuses

Dimensions - mm (inches)

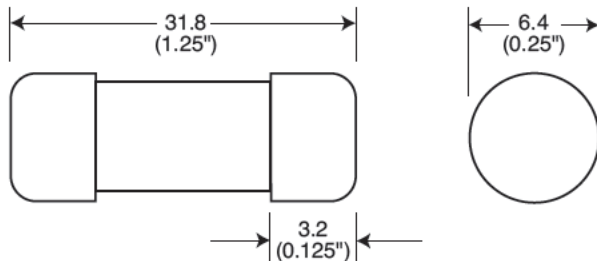

Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

Ferrule — FWH 500V: 0.25-30A


FWH 0.25-7A: 500V (6 x 32mm)

Time-Current Curve

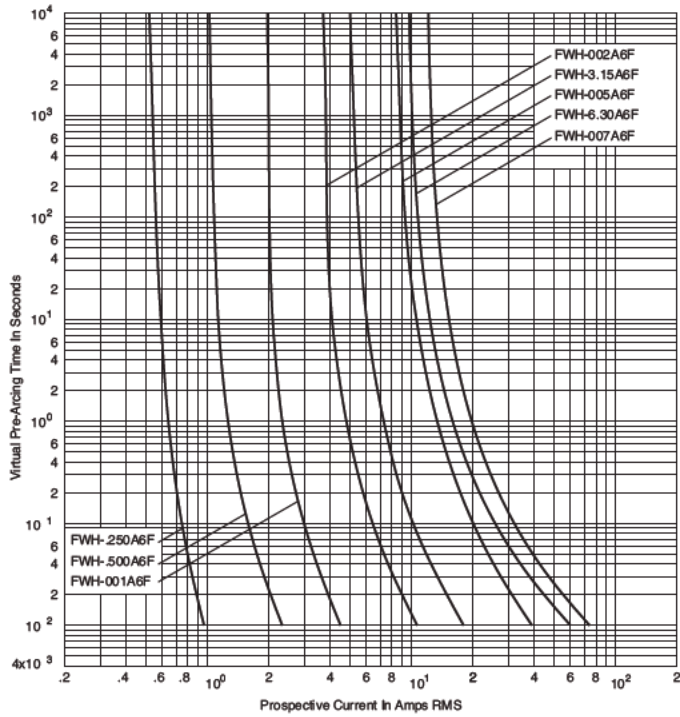

FWH 10-30A: 500V (6 x 32mm)

Time-Current Curve

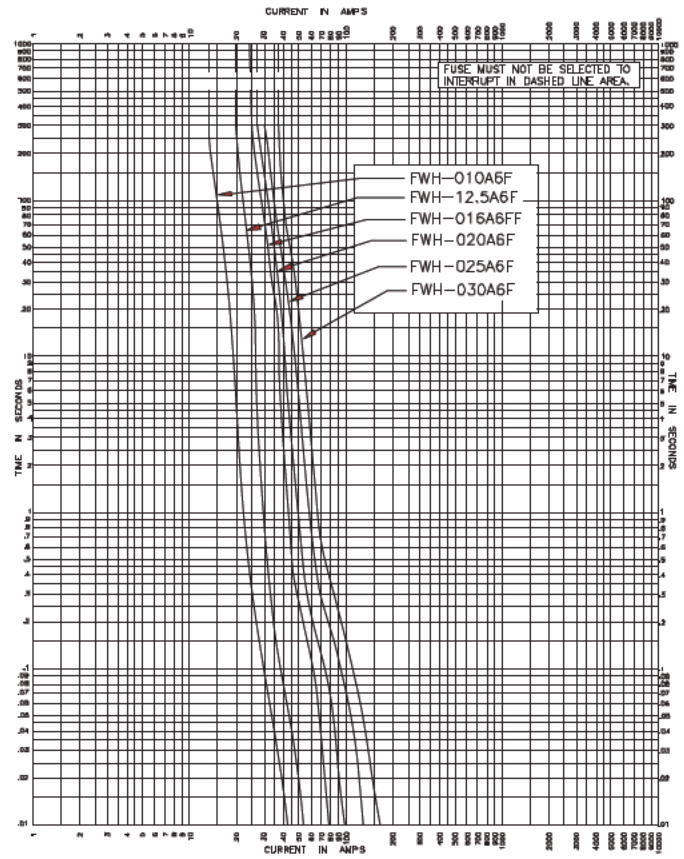

Ferrule — FWH 500V: 1-30A

FWH (14 x 51mm)

Specifications

Description: Ferrule style high speed fuses.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 500Vac/dc

Amps: — 1-30A

IR: — 200kA RMS Sym.

— 50kA @500Vdc


Agency Information: CE, UL Recognition 1- 30A & CSA Component Acceptance: 5 - 30A.




Electrical Characteristics

Total Clearing I^2t

The total clearing I^2t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I^2t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g , (rms).




Dimensions - mm (inches)

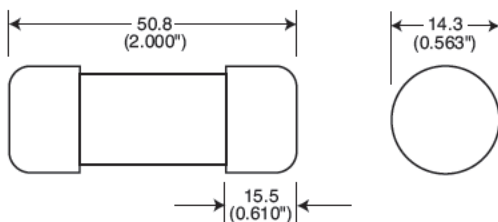

Arc Voltage

This curve gives the peak arc voltage, U_L , which may appear across the fuse during its operation as a function of the applied working voltage, E_g , (rms) at a power factor of 15%.

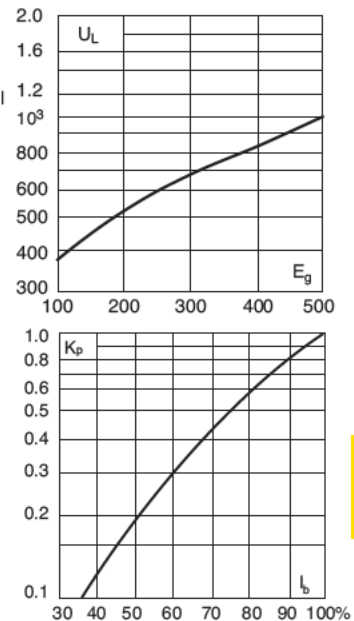

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p , is given as a function of the RMS load current, I_b , in % of the rated current.

Catalog Numbers

Catalog Numbers	Size	Electrical Characteristics			
		Rated Current RMS-Amps	I^2t (A ² Sec)		Watts Loss
			Pre-arc	Clearing at 500V	
FWH 1A14F	14 x 51mm (% ^o x 2")	1			
FWH 2A14F		2			
FWH 3A14F		3			2.3
FWH 4A14F		4			
FWH 5A14F		5	1.6	6.4	1.5
FWH 6A14F		6	1.6	6.4	1.5
FWH 10A14F		10	3.6	13	4
FWH 12A14F		12			
FWH 15A14F		15	10	40	5.5
FWH 20A14F		20	26	96	6
FWH 25A14F		25	49	191	7
FWH 30A14F		30	58	232	9

• Watts loss provided at rated current.
• See accessories on page 216.

Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I^2t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters


Ferrule — FWH 500V: 1-30A

FWH 1-30A: 500V (14 x 51mm)

Time-Current Curve

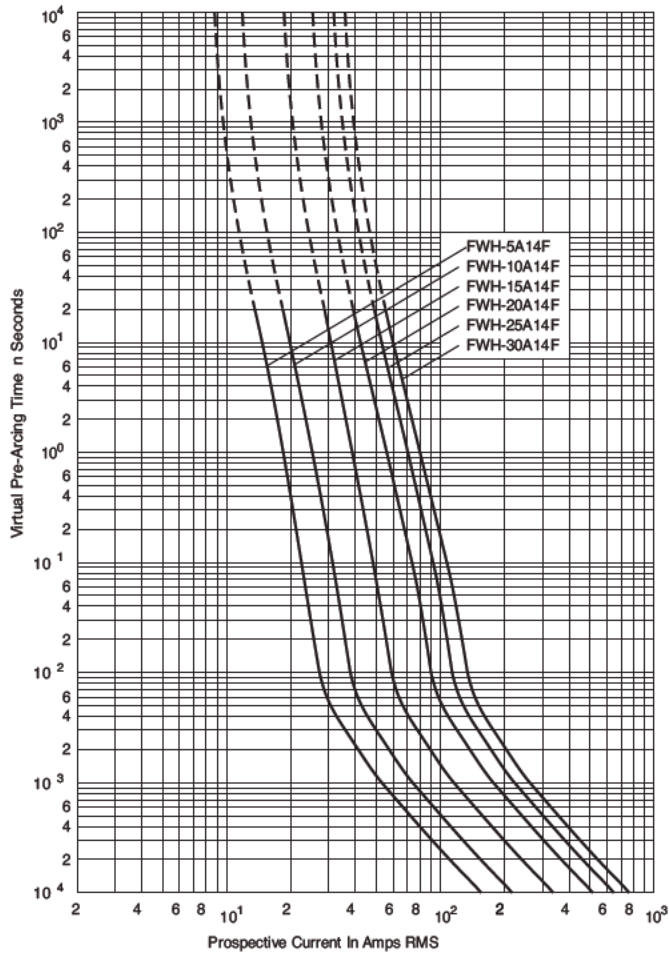

Peak Let-Through Curve

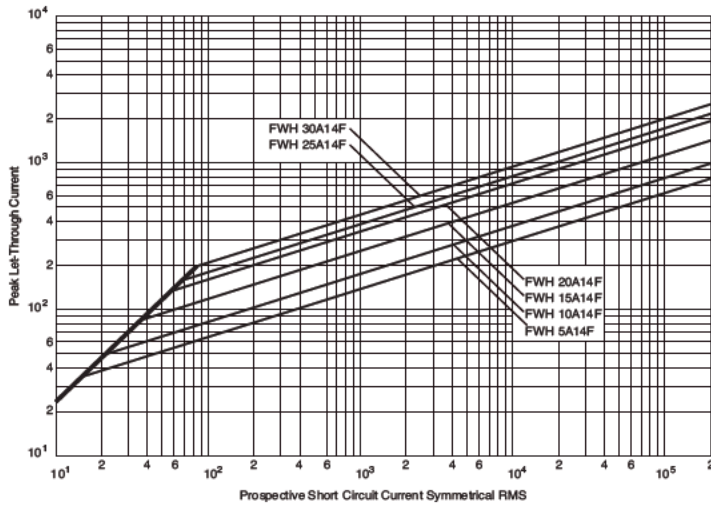

Data Sheet: 35785298

Ferrule — FWC 600V: 6-32A

FWC (10 x 38mm)

Specifications

Description: Ferrule style high speed fuses.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 600Vac/dc

Amps: — 6-32A

IR: — 200kA RMS Sym.

— 50kA @ 700Vdc (6-25A)


Agency Information: CE, UL Recognition: 6-32A.

UL Recognition: 6-25A


Electrical Characteristics

Total Clearing I²t

The total clearing I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (rms).




Dimensions - mm (inches)

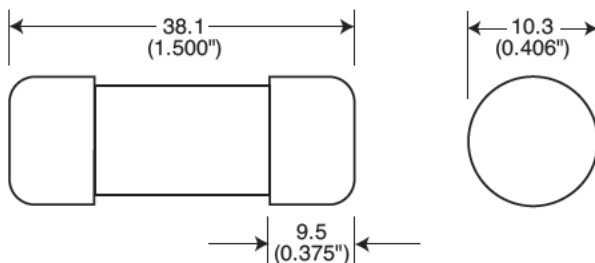


Arc Voltage

This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (rms) at a power factor of 15%.

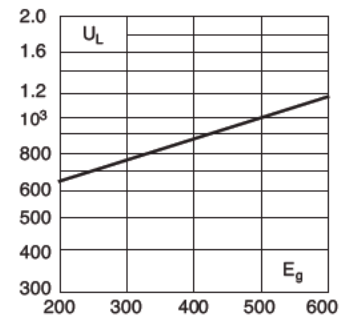

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in % of the rated current.

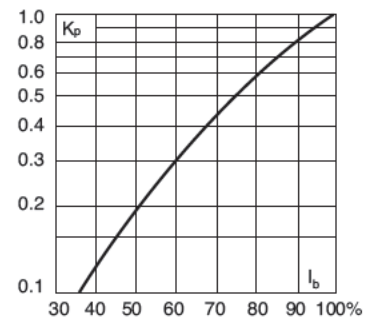

Catalog Numbers

Catalog Numbers	Size	Electrical Characteristics			
		Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss
			Pre-arc	Clearing at 600V	
FWC 6A10F	10 x 38mm (¹⁹ / ₃₂ " x 1 1/2")	6	4	30	1.5
FWC 8A10F		8	6	50	2.0
FWC 10A10F		10	9	70	2.5
FWC 12A10F		12	15	120	3.0
FWC 16A10F		16	25	150	3.5
FWC 20A10F		20	34	260	4.8
FWC 25A10F		25	60	390	6.0
FWC 30A10F		30	95	600	7.5
FWC 32A10F		32	95	600	7.5

• Watts loss provided at rated current.
• See accessories on page 216.

Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

Typical Applications


- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

High Speed Fuses


Ferrule — FWC 600V: 6-32A

FWC 6-32A: 600V (10 x 38mm)

Time-Current Curve

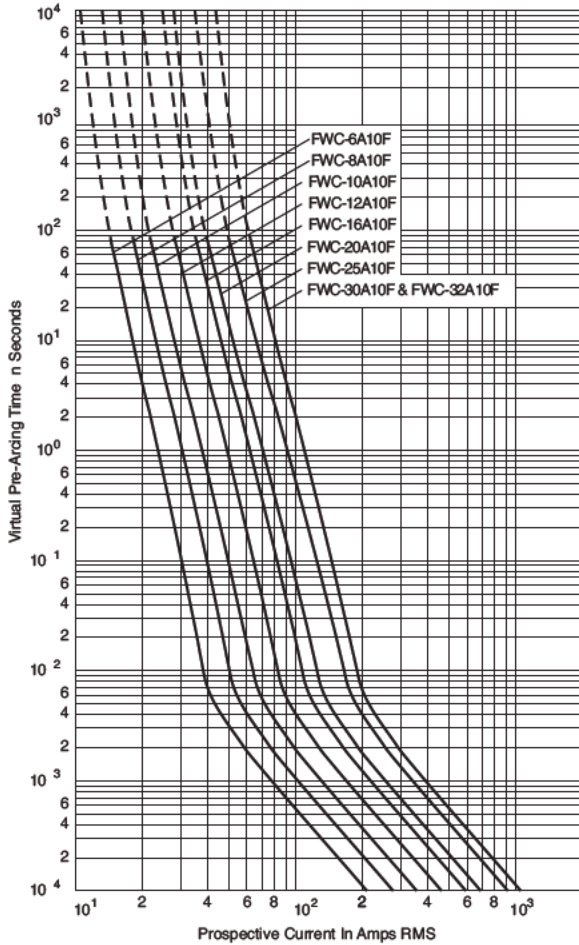

Peak Let-Through Curve

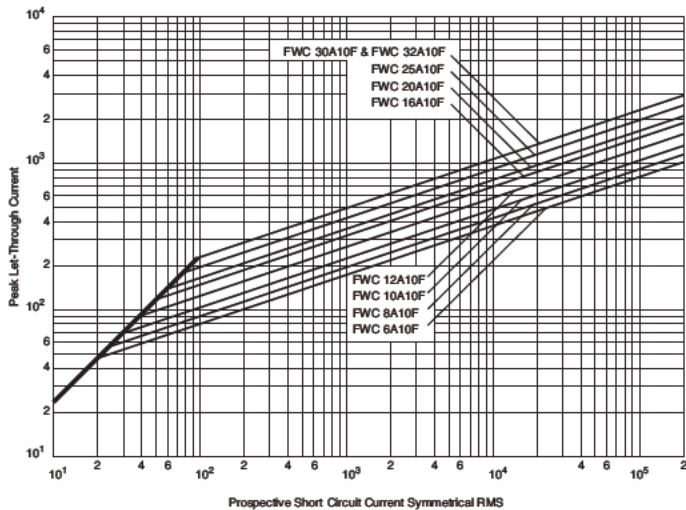

Data Sheet: 35785306

Ferrule — FWP 690V/700V (IEC/UL): 1-50A, Striker Optional

FWP (14 x 51mm)

Specifications

Description: Ferrule style high speed fuses with and without indicating striker.

Dimensions: See dimensions illustrations.

Ratings:

- Volts: — 690Vac (IEC)
- 700Vac (UL)
- 800Vdc (5-50A)


- Amps: — 1-50A
- IR: — 200kA RMS Sym.
- 50kA @800Vdc

Agency Information: CE, UL Recognition, CSA Component Acceptance for versions without indicator only.

Electrical Characteristics


Total Clearing I²t

The total clearing I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (rms).

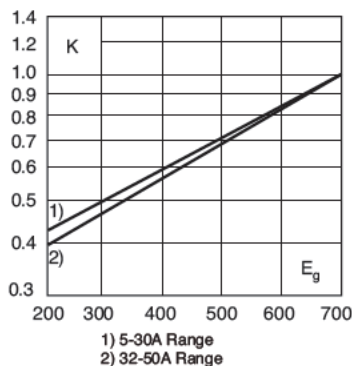


Dimensions - mm (inches)

Without Striker

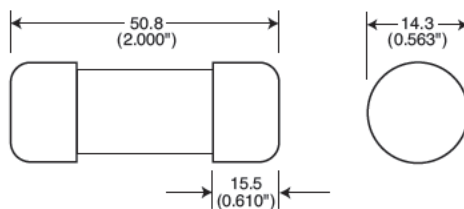


With Striker

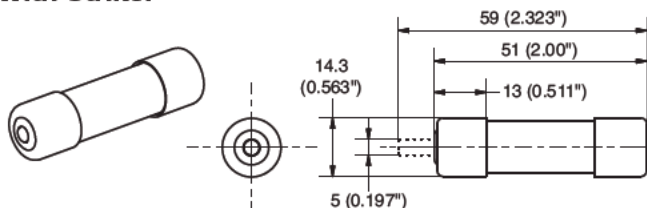

FWP with striker option.


Arc Voltage

This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (rms) at a power factor of 15%.

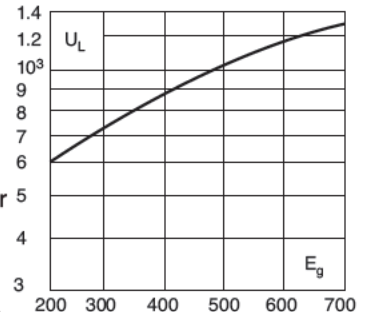

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in % of the rated current.

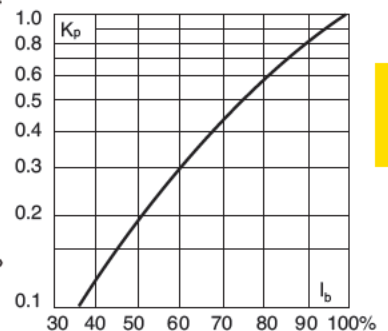

Catalog Numbers

Catalog Numbers	Size	Electrical Characteristics			
		Current RMS-Amps	Rated I ² t (A ² Sec)		Watts Loss
			Minimum Melting	Clearing At Rated Voltage	
Without Striker					
FWP 1A14Fa	14 x 51mm (% x 2")	1			
FWP 2A14Fa		2			
FWP 2.5A14Fa		2.5			
FWP 3A14Fa		3			
FWP 4A14Fa		4			
FWP 5A14Fa		5	1.6	11.0	1.5
FWP 10A14Fa		10	3.6	38.5	4
FWP 15A14Fa		15	8.6	70	5.5
FWP 20A14Fa		20	26.0	230	6
FWP 25A14Fa		25	46.5	375	7
FWP 30A14Fa	30	58	485	9	
FWP 32A14Fa	32	68	600	7.6	
FWP 40A14Fa	40	84	750	8	
FWP 50A14Fa	50	200	1800	9	
With Striker					
FWP 10A14FI	14 x 51mm (% x 2")	10	3.6	38.5	4
FWP 15A14FI		15	8.6	70	5.5
FWP 20A14FI		20	26.0	230	6
FWP 25A14FI		25	46.5	375	7
FWP 30A14FI		30	58	485	9
FWP 32A14FI		32	68	600	7.6
FWP 40A14FI		40	84	750	8
FWP 50A14FI		50	200	1800	9

* Watts loss provided at rated current.
* See accessories on page 216.

Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


Data Sheet: 720025

Ferrule — FWP 690V/700V (IEC/UL): 1-50A, Striker Optional


Without Striker

FWP 5-50A: 660V/700V (14x 51mm)

Time-Current Curve

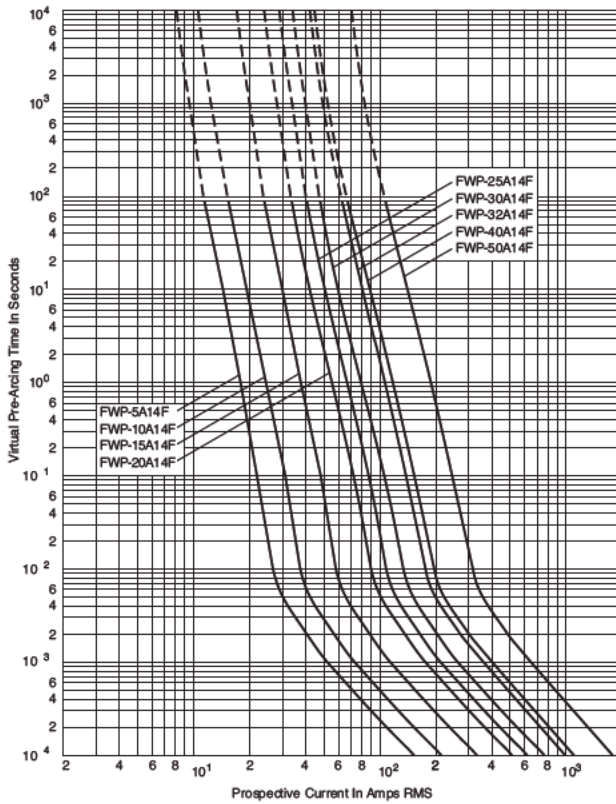

Peak Let-Through Curve

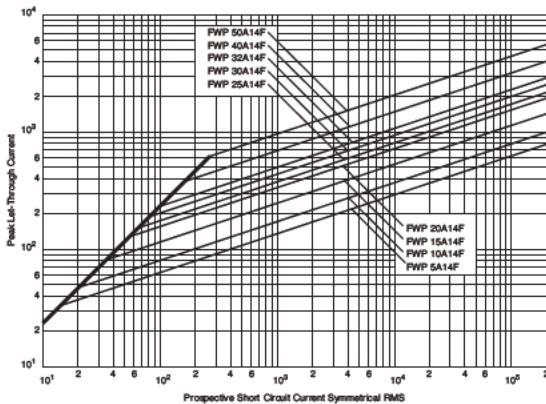

Data Sheet: 35785307

Ferrule — FWP 690V/700V (IEC/UL): 20-100A, Striker Optional

FWP (22 x 58mm)

Specifications

Description: Ferrule style high speed fuses with and without indicating striker.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 690Vac (IEC)
— 700Vac (UL)


Amps: — 20-100A
IR: — 200kA RMS Sym.
— 50kA @ 500Vdc

Agency Information: CE, UL Recognition

Electrical Characteristics


Total Clearing I²t

The total clearing I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (rms).

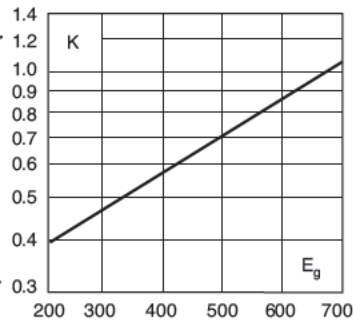


Dimensions - mm (inches)

Without Striker

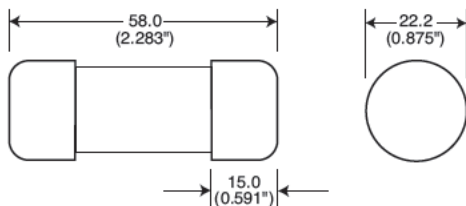

With Striker

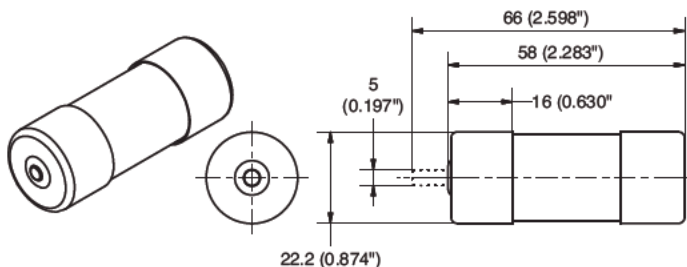


Data Sheet: 720026



FWP with striker option.


Arc Voltage

This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (rms) at a power factor of 15%.

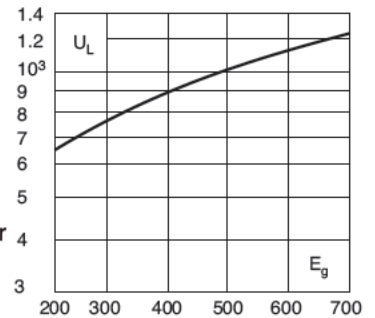

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in % of the rated current.

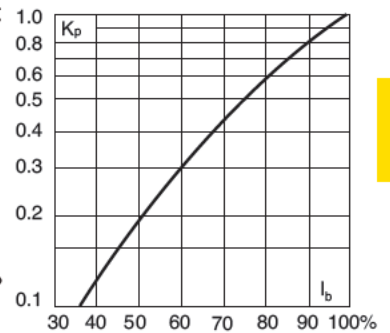

Catalog Numbers

Catalog Numbers	Size	Electrical Characteristics			
		Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss
			Minimum Melting	Clearing At Rated Voltage	
Without Striker					
FWP 20A22Fa	22 x 58mm (7/8" x 2 1/2")	20	19.0	260	5
FWP 25A22Fa		25	34.0	410	6
FWP 32A22Fa		32	53.5	605	8
FWP 40A22Fa		40	68	750	9
FWP 50A22Fa		50	135	1600	9.5
FWP 63A22Fa		63	280	3080	11
FWP 80A22Fa		80	600	6600	13.5
FWP 100A22Fa	100*	1100	12500	16	
With Striker					
FWP 20A22FI	22 x 58mm (7/8" x 2 1/2")	20	19.0	260	5
FWP 25A22FI		25	34.0	410	6
FWP 32A22FI		32	53.5	605	8
FWP 40A22FI		40	68	750	9
FWP 50A22FI		50	135	1600	9.5
FWP 63A22FI		63	280	3080	11
FWP 80A22FI		80	600	6600	13.5
FWP 100A22FI	100*	1100	12500	16	

*IEC/UL Voltage rating 690/700

Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

Typical Applications


- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

Ferrule — FWP 690V/700V (IEC/UL): 20-100A, Striker Optional


Without Striker

FWP 20-100A: 660V/700V (22 x 58mm)

Time-Current Curve

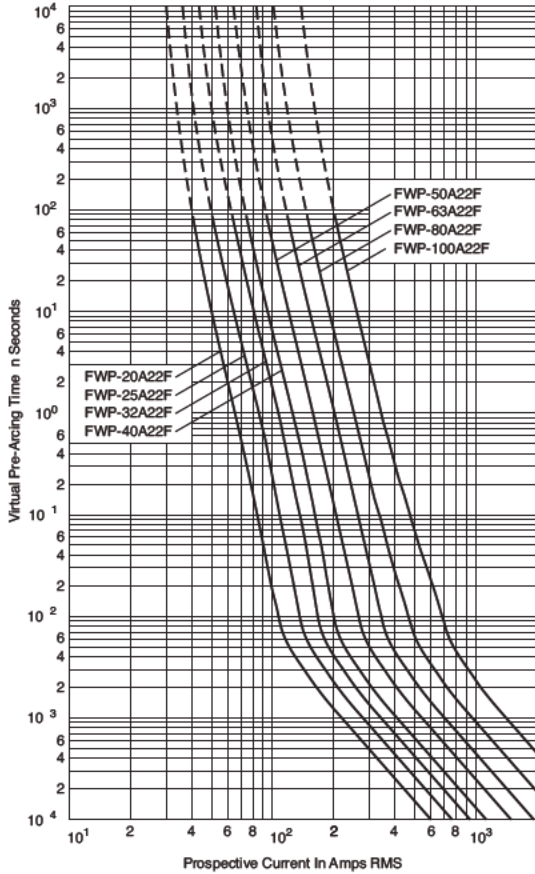

Peak Let-Through Curve

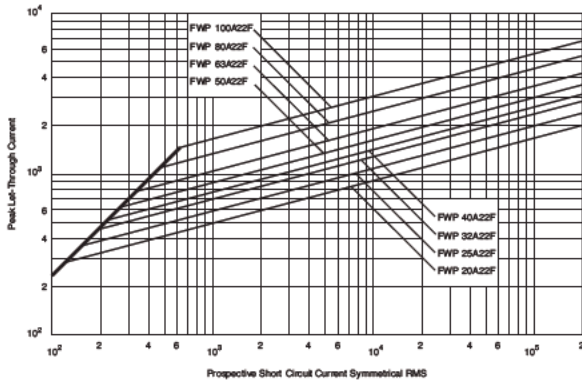

Data Sheet: 35785291

Ferrule — FWK 750V: 5-60A

FWK 5-30A (20 x 127mm) 35-60A (25 x 146mm)

Specifications

Description: Ferrule style high speed fuses.

Dimensions: See Dimensions illustrations.

Ratings:

- Volts: — 750Vac
- 750Vdc (Time constant = 10-15mS)

Amps: — 5-60A

IR: — 45kA RMS Sym.

Agency Information: CE



Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I^2t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

Catalog Numbers

Catalog Numbers	Size	Electrical Characteristics		
		Rated Current RMS-Amps	I^2t (A ² Sec)	
			Pre-arc	Clearing at 750Vdc
FWK 5A20F	20 x 127mm ($\frac{3}{8}$ " x 5")	5	8.5	16
FWK 8A20F		8	50	100
FWK 10A20F		10	95	200
FWK 15A20F		15	100	240
FWK 20A20F		20	125	315
FWK 30A20F		30	800	2600
FWK 35A25F	25 x 146mm (1" x $5\frac{7}{8}$ ")	35	1300	4300
FWK 40A25F		40	1600	5300
FWK 50A25F		50	3100	12000
FWK 60A25F		60	5900	24000

Recommended fuseholders for 20x127, CH127-1, -2, -3
 Recommended fuseclips for 20x127, 1A1837
 Recommended fuseclips for 25x146, A3354705

Dimensions - mm (inches)

Fig. 1: 5-30A


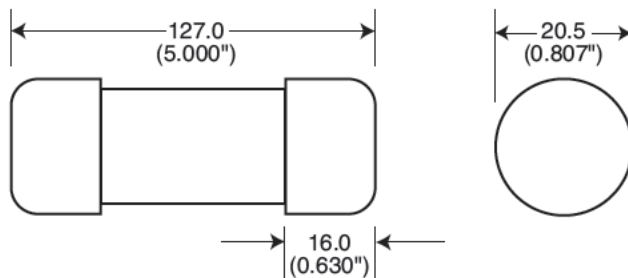


Fig. 2: 35-60A

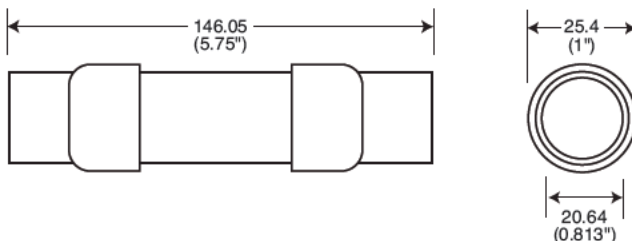


Data Sheet: 720039

Ferrule — FWK 750V: 5-60A

FWK 750V: 5-30A (20 x 127mm)
35-60A (25 x 146mm)

Time-Current Curve

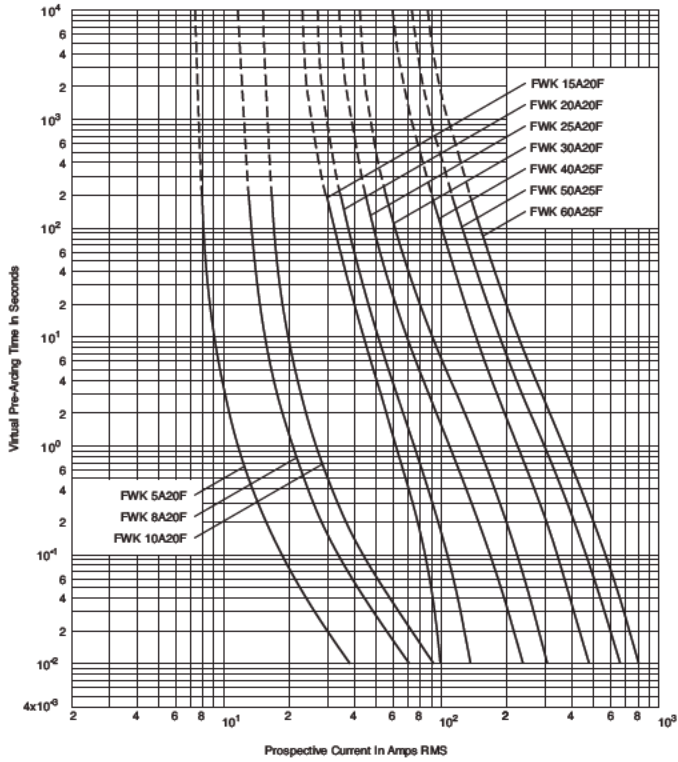

Ferrule — FWJ 1000V: 20-30A

FWJ (14 x 67mm)

Specifications

Description: Ferrule style high speed fuses.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 1000Vac/800Vdc

Amps: — 20-30A

IR: — 25kA RMS Sym.


— 20kA @ 800Vdc

Agency Information: CE, UL Recognized

Electrical Characteristics


Total Clearing I²t

The total clearing I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (rms).




Arc Voltage

This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (rms) at a power factor of 15%.

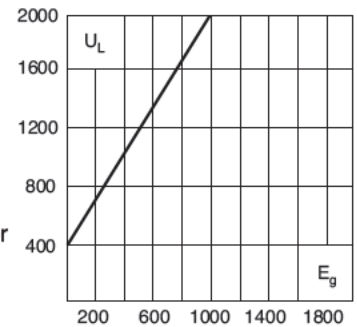

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in % of the rated current.

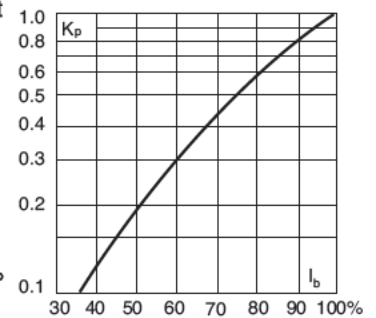

Catalog Numbers

Catalog Numbers	Size	Electrical Characteristics			
		Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss
			Pre-arc	Clearing at 1000V	
FWJ 20A14F	14 x 67mm	20	25	220	9
FWJ 25A14F	(% ^o x 2%)	25	33	350	11
FWJ 30A14F		30	52	450	14

• Watts loss provided at rated current.

• See accessories on page 216.


Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

Dimensions - mm (inches)

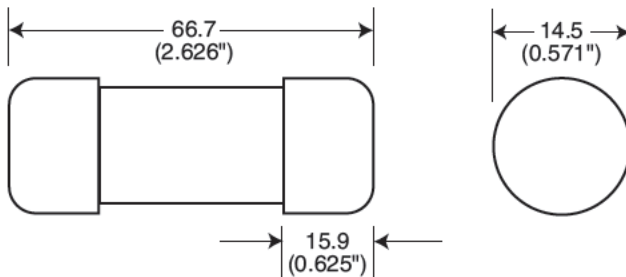


Fuseclips:

- Catalog Number: 5591 (see data sheet 2132)


Ferrule — FWJ 1000V: 20-30A

FWJ 20-30A: 1000V (14 x 67mm)

Time-Current Curve

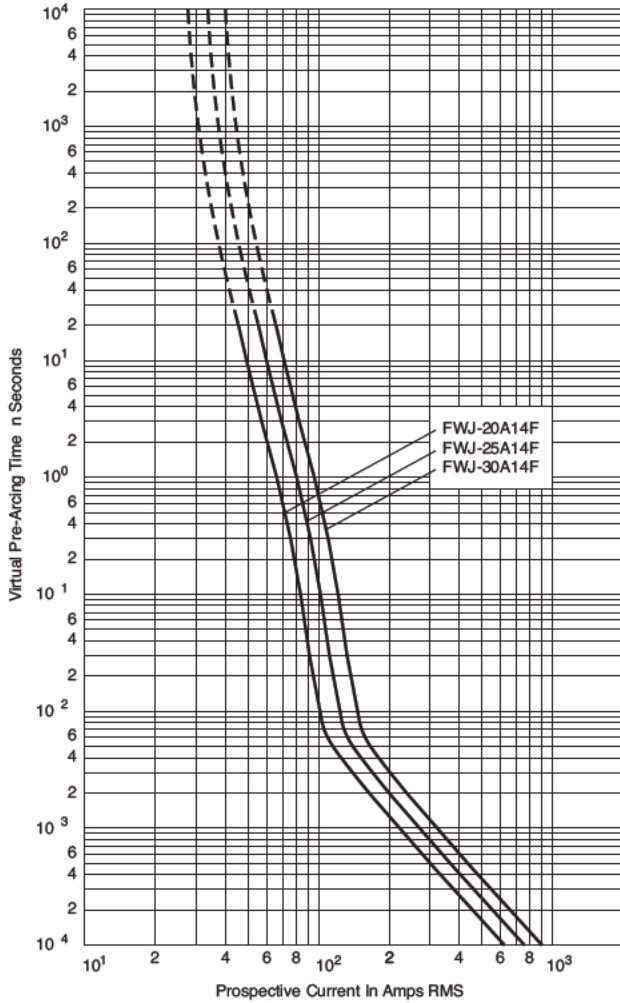

Peak Let-Through Curve

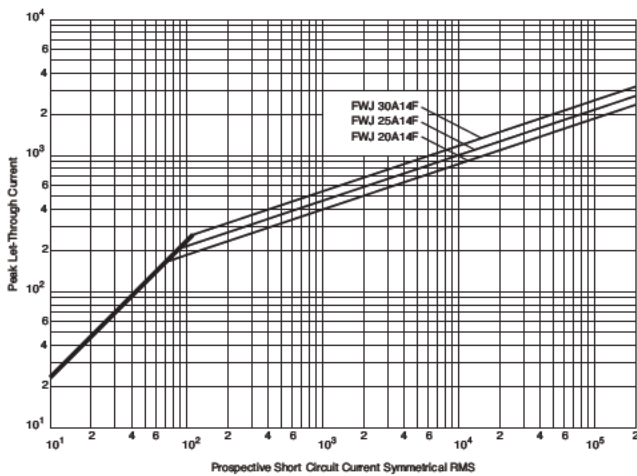

Ferrule — FWS/FWL 1000Vdc: 2-30A

FWS 2-15A (20 x 127mm) FWL 20-30A (20 x 127mm)

Specifications

Description: Ferrule style full range fuses.

Dimensions: See dimensions illustrations.

Ratings:

- Volts: — 1200Vac (FWL 20-30A)
- 1400Vac (FWS 8-15A)
- 2100Vac (FWS 2-6A)
- 1000Vdc (FWL/FWS 2-30)

Amps: — 2-30A

- IR: — 45kA RMS Sym.
- 30kA @ 1000Vdc


Agency Information: CE, IEC 60077

Catalog Numbers


Catalog Numbers	Size	Electrical Characteristics			
		Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss
			Pre-arc	Clearing at 1000Vdc	
FWS 2A20F	20 x 127mm (¹³ / ₁₆ " x 5")	2	0.8	2.4	4.4
FWS 6A20F		6	27	81	6.7
FWS 8A20F		8	64	192	7.6
FWS 10A20F		10	118	277	3.0
FWS 12A20F		12	170	380	3.4
FWS 15A20F		15	209	500	5.0
FWL 20A20F	20 x 127mm (¹³ / ₁₆ " x 5")	20	675	1550	5.9
FWL 25A20F		25	1200	2760	6.5
FWL 30A20F		30	1850	4300	7.5

- ADD "I" to catalog number for indicating version.
- Enclosed finger-safe fuse holder — CH127
- Open style fuse block — 4530-OP
- See accessories on page 216.
- Watts loss provided at rated current.

Dimensions - mm (inches)

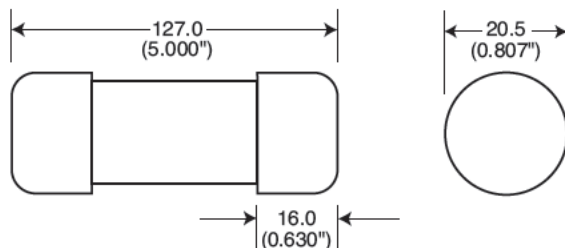

Indicating Version - Dimensions - mm (inches)

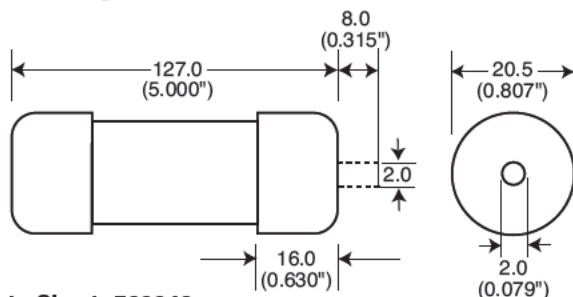

Data Sheet: 720040



Features and Benefits


- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I²t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters
- Traction aux circuits
- Capacitor protection

FWL/FWS 2-30A: 1000Vdc 2-30A (20 x 127mm)

Time-Current Curve

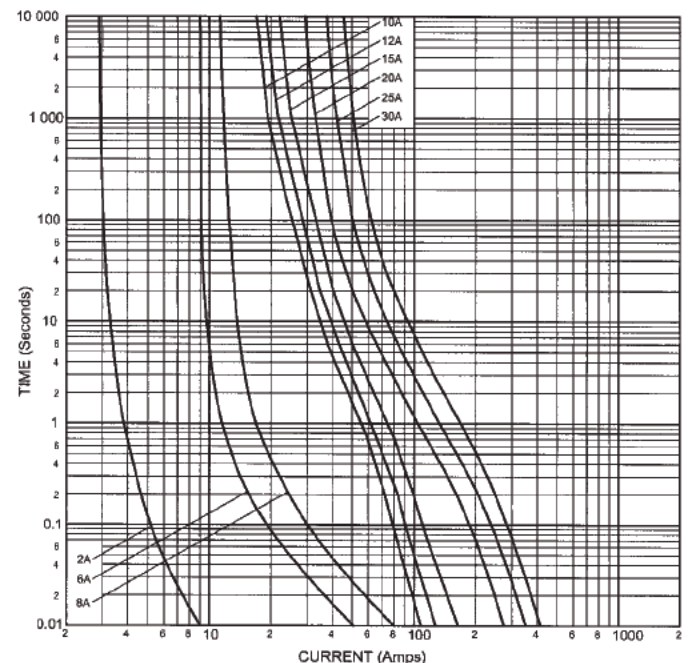

High Speed Fuses

Ferrule Fuse Accessories

Fuse Holders

Specifications

Catalog Symbol: CH Series

Description: DIN rail mount fuse holders

Agency Information:
cULus/cURus/CE

North American 10 x 38

Class CC: Listed UL 4248, Guide IZLT, File E14853, Certified CSA Std. C22.2 No. 39, Class 6225 01, File 47235

North American 10 x 38 Midget: Recognized UL 4248, Guide IZLT2, File E14853, Certified CSA Std. C22.2 No. 39, Class 6225 01, File 47235

European: 10 x 38 IEC 269-2-1, 14 x 51 IEC 269-2-1, 22 x 58 IEC 269-2-1

Features and Benefits

- Finger-safe design - No exposed contacts
- DIN rail mount (35mm) - Fits standard mounting rails
- Optional open fuse indication lights tells fuse status at a glance
- Handle/fusepuller easily installs and removes fuses
- Available in single and multi-pole configurations
- Wire ready lugs and spade terminal connections save installation time
- CE marking
- Available up to 1000Vdc
- PLC device available for remote monitoring

Typical Applications

- Switchboard panel, control consoles, small motors, transformers, and similar applications

Recommended Cooper Bussmann Fuse Types

Class CC North American Class CC Fuses - LP-CC, FNQ-R, KTK-R

10 x 38 North American Midget Fuses - FNQ, KTK, AGU, BAF, BAN, FNM, FWA, FWC, PV & DCM

14 x 51 Fuses - FWX, FWH, FWP & NON

22 x 58 Fuses - FWP

See pages 257 and 258 for CH Series fuse holder information.



Fuse Blocks

Specifications

Catalog Symbol: J70100, J70032

Description: Fuse blocks for 22 x 58mm & 14 x 51mm fuses.

Ratings:

Volts: — 700Vac

Amps: — 32-100A

Withstand: — 200kA RMS Sym.

Agency Information: CE, UL Recognized, Guide IZLT2, File E14853

Flammability Rating: UL 94V0

Catalog Numbers

Catalog Numbers	Fuse Size	Amps	Poles	Max Wire Size	Terminations
J70032 2CR	14x51	32	2	#2	Box Lug w/ Retaining Clip
J70032 3CR		32	3	#2	
J70100 1CR	22x58	100	1	#2	
J70100 2CR		100	2	#2	
J70100 3CR		100	3	#2	

