
## **WRBT 2000 K-4-Z8 Plastic fiber optic**




- Fine inner fibre for maximal resolution
- Spherical optics for cylindrical ligh beam Ø 8 mm

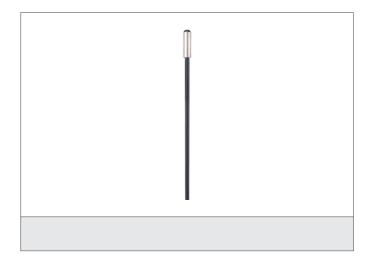

## Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

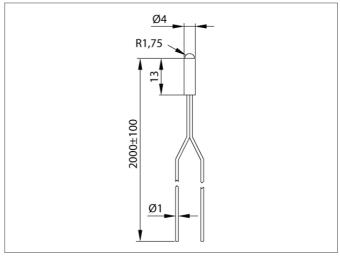

| TECHNICAL INFORMATION (typ.) |   |
|------------------------------|---|
| Operating principle          | Diffuse reflective sensor   |
| Size                         | Ø 4 mm (Diameter)   |
| Design                       | cylinder  |
| Length                       | 2.000 mm  |
| Opening angle                | 56°   |
| Light outlet                 | axial, Spherical optics   |
| Single fibre-optics          | Ø 1,0 mm  |
| single fibre                 | Ø 0,5 mm  |
| Bending radius               | > 15 mm   |
| Temperature resistance       | -25 + 70 °C   |
| Protection class             | IP 67   |
| For                          | Amplifier for plastic fiber optics  |
| Material                     | stainless steel (Thread sleeve)<br>polymethyl methacrylate (Fibre)<br>PE (Cladding) |
|                              |   |
|                              |   |