


USS 46 K 1500-TSSL

Ultrasonic Through Beam Sensor, Transmitter


- Without blind zone
- Insensitive to dirt
- Insensitive to ambient noise
- Scanning does not depend on surface

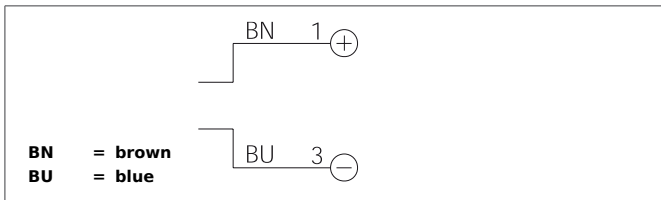

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

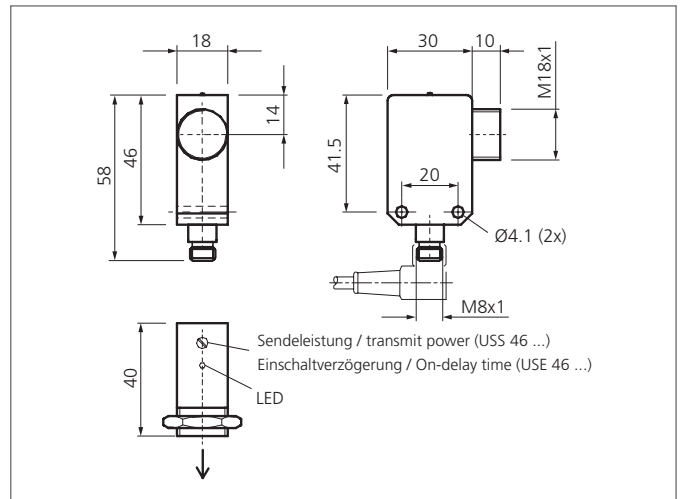

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Ultrasonic through beam sensor
Size	46 x 30 x 18 mm (Dimensions)
Design	cuboid design
Service voltage	18 ... 30 V DC
Internal power consumption	< 55 mA
Operating distance	0 ... 1.500 mm
Operating frequency	180.000 Hz
Transmitting power	0,5 ... 100 %
Ambient temperature	-20 ... +50 °C
Insulation voltage endurance	500 V
Protection class	IP 67
Casing material	stainless steel, plastics V2A (1.4301 / AISI 304), (Polyamide - PA)
Connection	Connector, M8, 3-poled