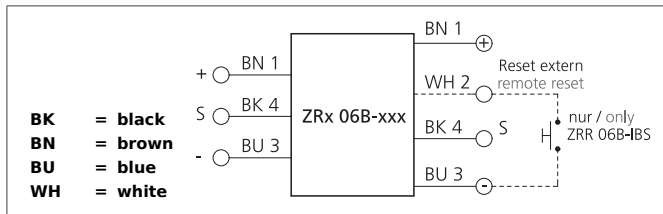# ZR 06B-TSSL
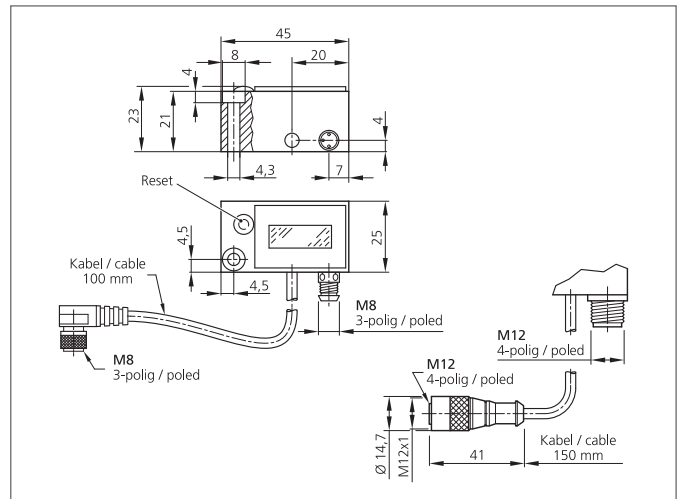# Counting Module with Reset Function

di-soric

- 6 lines LCD display
- Quick and simple mounting directly on the sensor
- Pluggable without any wiring (work)
- Long-term storage of values thanks to back-up battery
- Reset via key
- Robust metal casing

CE

BK	= **black**
BN	= **brown**
BU	= **blue**
WH	= **white**

ZRx 06B-xxx

Reset extern / remote reset

nur / only ZRR 06B-IBS

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Service voltage	10 ... 35 V DC
Internal power consumption	3 mA
Display	6 lines LCD display, LED yellow (Display output)
Countering frequency	10.000 Hz
Reset of counter	Reset key
Ambient temperature	-10 ... +60 °C
Insulation voltage endurance	500 V
Protection class	IP 67
Casing material	Aluminium black anodized
Connection	Connector, M8, 3-poled