


OLVTI 40 N3K-IBS

Amplifier for glass fiber optics


- Metal casing
- Infrared light
- Teach buttons, remote teach input
- Light/dark switching

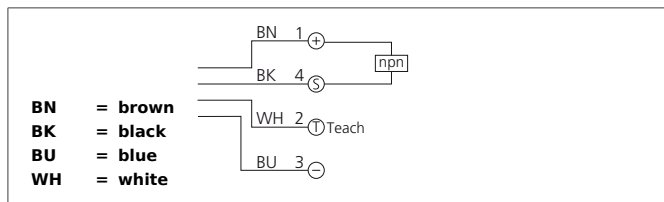

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

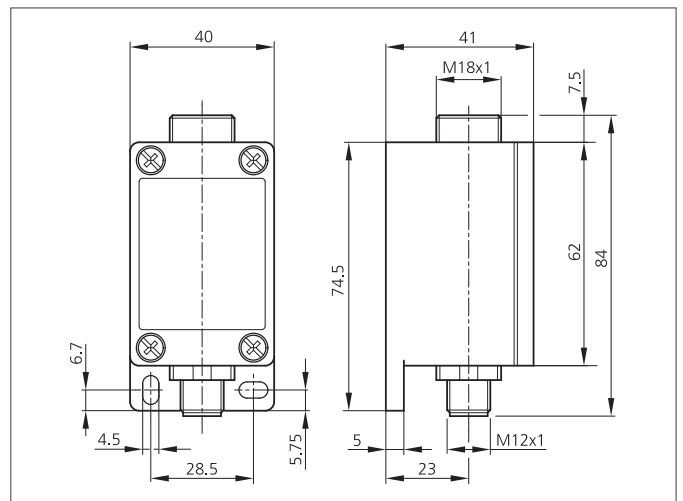

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Amplifier for		Glass fiber optics M18
Evaluation		digital
Emitted light		Infrared, 880 nm, clocked
Service voltage		10 ... 30 V DC
Internal power consumption		< 55 mA
Control buttons		3 (Teach, Man-, Man+)
Operating distance		60 mm
Sensitivity adjustment		Teach key
Switching output		npn, 200 mA, NO/NC, switchable
Switching hysteresis		< 10 %
Display		LED: green - Run, yellow - Output, red - Teach / Error
Switching frequency		1.500 Hz
Reproducibility		< 2 %
Ambient temperature		-10 ... +60 °C
Temperature drift		0,3 %/K
Ambient light immunity		50 kLx
Protection class		IP 65
Casing material		Die-cast zinc lacquered finish
Connection		Connector, M12, 4-poled