



Kraus & Naimer

BLUE LINE switchgear

since 1907

Catalog 120 Control Switches

12/2015

CG, CH and CHR type up to 25 A



Kraus & Naimer

The development of the Blue Line rotary switch, contactor and motor starter product ranges is based on more than hundred years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

BLUE LINE

Blue Line products are protected by numerous patents throughout the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL
FOR QUALITY SWITCHGEAR

Disconnectors and Main Switches acc. to IEC 60947-3 see Catalog 500

Contents	Page
Construction Data	4
Dimensions and Nominal Ratings	5
How to order	6, 7
Switch Function and Configuration	
ON/OFF Switches	8, 9
Double-throw Switches	10-12
General Application Switches	12
Coding Switches	13
Multi-step Switches	14-16
Voltmeter Switches	17-19
Ammeter Switches	19-21
Volt-ammeter Switches	21
Control Switches	21, 22
Motor Switches	23-25
Types of Mounting	
Panel Mounting	26-29
Base Mounting	30, 31
Escutcheon Plates	32, 33
Handles	34
International Standards and Approvals	35
Technical Data	36-38
Dimensions	
Panel Mounting	38-42
Base Mounting	43, 44
Overall Switch Lengths	44, 45
Blue Line Switchgear: Summary	46

Construction Data

Cam switches of the CG, CH and CHR-series are designed for universal application and may ideally be used for control switches, instrumentation switches and motor control switches. Different contact designs, contact materials and terminals allow the use as well as in electronic circuitry and in aggressive environments in accordance with IEC 60947-3, EN 60947-3, VDE 0660 part 107, UL and cUL (cUR).

The stage is the basis for all switches and can be supplied with a maximum of 2 contacts. All switches of this series are supplied with open terminals which are accessible while the switch is installed. The terminals are protected against accidental finger contact according to EN 50274, VDE 0660 part 514 and BGV A3. Captive plus-minus terminal screws and integrated screwdriver guides facilitate wiring. Due to the particular arrangement of the terminals of the CG switches, it is possible


to install the switches closely, side by side, or to mount them directly at the cable trays. The contact terminal numbers are easy to read, even if the switch is installed.

The captive plus-minus screws of the CH and CHR-series are located about 90° apart from the terminal direction. This allows for connecting wires without any interference with the terminal screws.

For connection with ring type terminals the CHR-series were designed. The switches are supplied with large open terminals. This allows for connection without removing the screws.


3 different Contact Systems are available

CG6 to
CHR16B




A rigid, double-break bridge with silver alloy contacts provides high making and breaking capabilities for regular control applications.

CG4 and
CG4-1




High contact reliability by multiple cross-point contacts, CG4 with 1 μ and CG4-1 with 35 μ gold plating.

CGD4-1



High contact reliability by H-bridge design with "cross-wire" contacts. The contact system with gold-plated contacts (CH12/CHR12 with silver contact) allows for low voltages, electronic compatible.

CH11/CHR11
CH12/CHR12




Type	Size	Possible Switching Angles	Max. No. of Stages
CG4-CGD4-1	S00	30°, 45°, 60°, 90°	8
CG6-CHR6	S00	30°, 45°, 60°, 90°	4
CG8-CHR16	S0	30°, 45°, 60°, 90°	12
CG8B	S1	30°, 45°, 60°, 90°	12
CH10B-CHR16B	S1	30°, 45°, 60°, 90°	12
CG8S	S0	60°	on request

CG-series




CH-series

CHR-series

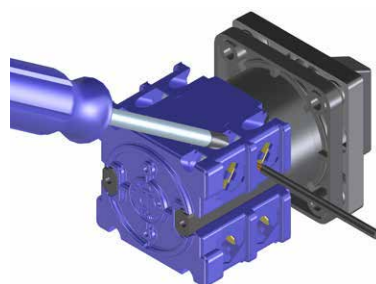

Above illustrates the standard terminal positions.

Nominal Ratings

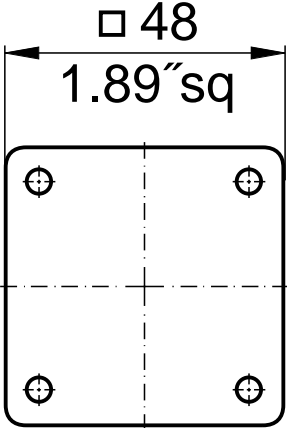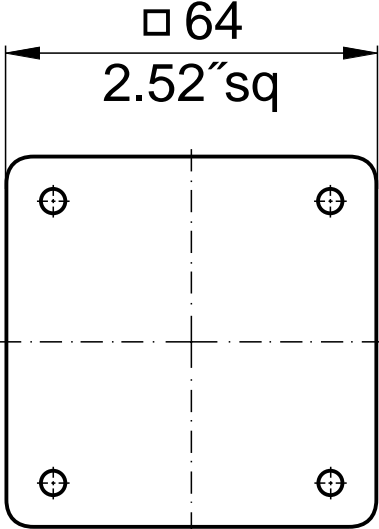Switch Size	Type	According to IEC 60947-3, EN 60947-3, VDE 0660 part 107			
		Operational Voltage ¹ U_e V	Thermal Current I_u/I_{th} A	Motor Rating 3 x 380 V-440 V AC-23A AC-3 kW kW	
S00 	CG4	440	10	3	2,2
	CG4-1	440	10	3	2,2
	CGD4-1	440	5	-	-
	CG6	690	20	7,5	5,5
	CH6	690	20	7,5	5,5
	CHR6	690	20	7,5	5,5
S0 	CG8	690	20	7,5	5,5
	CH10	690	20	7,5	5,5
	CH11	600	6	-	-
	CH12	600	6	-	-
	CH16	690	25	11	7,5
	CHR10	690	20	7,5	5,5
	CHR11	600	6	-	-
	CHR12	600	6	-	-
	CHR16	690	25	11	7,5
	S1 	CH10B	690	20	7,5
CH16B		690	25	11	7,5
CHR10B		690	20	7,5	5,5
CHR16B		690	25	11	7,5

For further technical details, refer to pages 36-38.

¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.

How to order

Disconnectors and Main Switches according to IEC 60947-3 see Catalog 500

Three types of data (shown below) are required for ordering Blue Line cam-operated switches. Code numbers for ordering are shown in this catalog.

1. Type of Switch

The type of switch required may be easily selected by referring to the table on page 5 which shows the thermal current, power rating and dimensions of each switch. For further technical details, refer to pages 36-38. Variations of contacts and terminals are shown below.

2. Switch Function

The code numbers for standard switches shown on pages 8-25 indicate the switch function, escutcheon plate, handle and any optional extras.

Additional coding to modify type and color of handle and escutcheon plate is explained below.

3. Type of Mounting

Types of mounting are shown on pages 26-31. Catalog **101** describes enclosures and optional extras.

Specify the mounting code to indicate required mounting.

CH10

A202-600

VE

Type of Switch

Extending the switch type coding the following combinations will define:

Amendment	Definition	For switch types
-1	with gold contacts ¹	CG4-1, CGD4-1, CHR6-1, CH10-1, CHR10-1, CH10B-1, CHR10B-1, CH16B-1
-4 ²	with quick connects (nickel-plated)	CH6-4, CH10-4, CH16-4, CH10B-4, CH10R-4, CH10S-4, CH16B-4
-6 ²	with angled quick connects (nickel-plated)	CH6-6, CH10-6, CH10S-6, CH16-6
B	S0 switches with latching mechanism size S1	CG8B, CH10B, CH11B, CH12B, CH16B, CH16B, CHR10B, CHR16B for four hole panel mounting
L	with lockout-relay w/o manual release	CH10L, CH16L, CHR10L, CHR16L
M	with lockout-relay with manual release	CHR10M
X	with power failure release	CG8X
R	with spring return latching mechanism	CG8R, CH10R, CH11R, CHR10R, CHR11R
S	with snap action	CG8S, CH10S, CH16S, CHR10S, CHR16S with 60° or 90° switching
Y	with power failure release and trip-free release	CG8Y

Example: Coding for switch type **CH10** with latching mechanism size S1 is **CH10B**.

Modification of Switches

The part number for switch function and options may be modified in cases where items are required other than standard. The modification may involve the escutcheon plate inscription, color combination of escutcheon plate and handle, type of escutcheon plate and handle or the optional extra.

Switch Size	Escutcheon Plate Frame	Handle	Escutcheon Plate Backing	Escutcheon Plate Lettering	Dash Number
S00, S0, S1	black	black	brushed alu	black	-600
S00, S0, S1	black	black	black	mat silver	-700

¹Technical data on request. ²Connection Diagrams on request.

How to order

Modification of Switches

The standard switch consists of a transparent escutcheon plate with brushed aluminum backing and black inscription. The escutcheon plate frame is black as well as the handle. Page 6 shows further color combinations of escutcheon plate and handle which are available. The appropriate dash number must be substituted in the switch function coding to specify other color combinations as required.

Example: The complete coding for switch type CG8 with a 3 pole ON/OFF switch function, electro-gray handle and electro-gray escutcheon plate frame with brushed aluminum backing and black inscription which reads 0-1 is as follows: **CH10 A202-100 E**.

The following is a list of special programs for escutcheon plate and handle combinations. They may be obtained by specifying any one of the following two (2) digit dash numbers as a part of the overall dash number. It is still necessary to prefix these two digit numbers with the first digit which represents the color combination desired.

Special programs for escutcheon plate and handle combinations

- 00** = without escutcheon plate, without handle
- .01** = without escutcheon plate
- .02** = without handle
- .03** = with square escutcheon plate without lettering
- .04** = with rectangular escutcheon plate without lettering
- .05** = with square escutcheon plate without lettering and without handle
- .06** = with rectangular escutcheon plate without lettering and without handle
- .07** = standard escutcheon plate, without lettering on rectangular section
- .08** = with F-handle
- .09** = with P-handle
- .10** = escutcheon plate frame and fixation ring only (if using switches with single hole mounting: - **.16**)
- .11** = without escutcheon plate, but with handle bearing plate
- .12** = with yellow escutcheon plate backing and red handle
- .14** = with B-handle
- .16** = escutcheon plate frame and fixation ring only if using switches with single hole mounting
- .17** = standard escutcheon plate and rectangular add-on escutcheon plate if using switches with single hole mounting FT2

Example: The complete coding for switch type CG8 with a 3 pole ON/OFF switch function with electro-gray escutcheon plate frame, square escutcheon plate without lettering, brushed aluminum plate backing and electro-gray handle reads as follows: **CH10 A202-103 E**.

Handles, Escutcheon Plates and Optional Extras

The handles for standard switches shown on pages 8-25 are suitable for mounting units with four hole mounting. Alternative types of handles available are illustrated on pages 26-31.

When a handle, escutcheon plate or optional extra is required but not covered by the dash number, the code number for the selected component should be entered separately. A comprehensive range of available standard escutcheon plates is illustrated on pages 32-34. Non-standard or special escutcheon plate engravings are available at extra cost. The large number of optional extras and enclosures is covered in Catalog **101**.

Switch Size

CG, CH and CHR switches are available in sizes S00, S0 and S1. These size codes indicate the dimension of the mounting, the escutcheon plate and the handle, as well as the size of optional devices and enclosures. Page 5 lists these sizes and the various switch types they include.

Ordering of Special Switches and Escutcheon Plates

When ordering special switches and escutcheon plates it is advisable to use our order form, as illustrated. The customer's requirements are shown in blue as an example.

For technical reasons, it may not be possible to follow the sequence of contacts requested by the customer. The final contact development which is sent with every switch will show the customer's original terminal markings.




























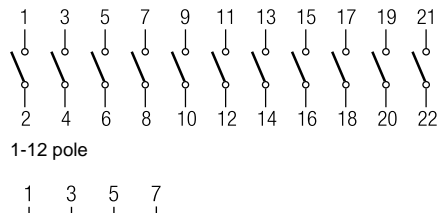



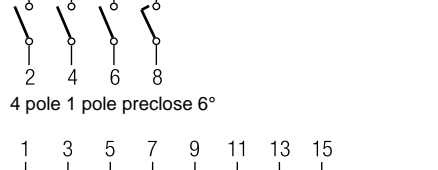



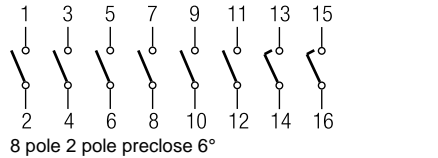



The diagram shows a circular scale for 'MOTOR 1' with positions O, H, and A marked. The grid below shows contact configurations for these positions across 48 terminals. For example, position O has contact at terminal 7, H at terminals 2, 3, 4, 11, 12, 13, 14, and A at terminals 5, 6, 10, 16, 17.

Order forms are available on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

ON/OFF Switches with 60° Switching

[Dimensions p. 45](#)

1 pole 2 pole 3 pole 3 pole with red handle 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° ¹ 9 pole 10 pole 11 pole 12 pole						A200-600 A201-600 A202-600 A202-626 A203-600 WAA653 WAA341 A342-600 A343-600 A344-600 WAA654 WAA345 A346-600 WAA347 A348-600	1 1 2 2 2 2 3 4 4 4 4 5 5 6 6		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° ¹ 9 pole 10 pole 11 pole 12 pole						A200-620 A201-620 A202-620 A203-620 WAA653 WAA341 A342-620 A343-620 A344-620 WAA654 WAA345 A346-620 WAA347 A348-620	1 1 2 2 2 2 3 4 4 4 4 5 5 6 6		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-621 A201-621 A202-621 A203-621 WAA653 WAA341 A342-621	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-622 A201-622 A202-622 A203-622 WAA653 WAA341 A342-622	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-623 A201-623 A202-623 A203-623 WAA653 WAA341 A342-623	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-624 A201-624 A202-624 A203-624 WAA653 WAA341 A342-624	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole						A200-625 A201-625 A202-625 A203-625 WAA653 WAA341 A342-625	1 1 2 2 2 3 3		









































































[< back to table of contents >](#)

¹For use in a three phase four-wire system with switched neutral.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			























































ON/OFF Switches with 90° Switching

[Dimensions p. 45](#)

1 pole contacts	 F056					A290-600	1	 1, 2, 3, 4, 5 and 6 pole
2 pole preclose 30°						A291-600	1	
3 pole						A292-600	2	
4 pole						A324-600	2	
4 pole 1 pole preclose 60° ¹						A293-600	2	
4 pole 3 pole preclose 30°						WAA327	2	
5 pole contacts	 F063					A290-620	1	 4 pole 1 pole preclose 60°
2 pole preclose 30°						A291-620	1	
3 pole						A292-620	2	
4 pole						A324-620	2	
4 pole 1 pole preclose 60° ¹	 F062					WAA208	2	
4 pole 3 pole preclose 30°						WAA327	2	
5 pole contacts						WAA325	3	
6 pole preclose 30°						A326-620	3	
3 pole 360° rotation	 F206					WAA208	2	
3 pole for foot operation						WAA386 ²	2	

[< back to table of contents >](#)

ON/OFF Switches with 30° Switching








































































1 pole	 F169					WAA100	1	 1-4 pole
2 pole						WAA101	1	
3 pole						WAA102	2	
4 pole						WAA103	2	
1 pole with spring return	 F153					A204-600	1	 1-4 pole
2 pole with spring return						A205-600	1	
3 pole with spring return						WAA206	2	
4 pole with spring return						WAA207	2	
1 pole with spring return	 F169					A204-620	1	
2 pole with spring return						A205-620	1	
3 pole with spring return						WAA206	2	
4 pole with spring return						WAA207	2	

¹For use in a three phase four-wire system with switched neutral. ²available as switch types CH16B and CHR16B

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ²
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

































Double-throw Switches without „OFF“ 60° Switching

[Dimensions p. 45](#)






















































1 pole	 <p>F072</p>					A220-600	1	
2 pole						A221-600	2	
3 pole						A222-600	3	
4 pole						A223-600	4	
4 pole 1 pole preclose 6° ¹						WAA673	4	
5 pole						A369-600	5	
6 pole						A370-600	6	
7 pole						A371-600	7	
8 pole						A372-600	8	
8 pole 2 pole preclose 6° ¹						WAA972	8	
9 pole						WAA373	9	
10 pole						WAA374	10	
11 pole					WAA375	11		
12 pole					WAA376	12		

[< back to table of contents >](#)

Double-throw Switches without „OFF“ with electrically isolated contacts

1 pole	 <p>F072</p>					A720-600	1	
2 pole						A721-600	2	
3 pole						A722-600	3	
4 pole						A723-600	4	
4 pole 1 pole preclose 6° ¹					WAA973	4		
1 pole with spring return	 <p>F026</p>					A795-600	1	

Double-throw Switches without „OFF“ 30° Switching

1 pole	 <p>F026</p>					WAA120	1	
2 pole						WAA121	2	
3 pole						WAA122	3	
4 pole						WAA123	4	
1 pole with spring return	 <p>F026</p>					A295-600	1	
2 pole with spring return						A296-600	2	
3 pole with spring return						WAA297	3	
1 pole with spring return	 <p>F153</p>					A295-620	1	
2 pole with spring return						A296-620	2	
3 pole with spring return						WAA297	3	

¹For use in a three phase four-wire system with switched neutral. ²Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ²
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Double-throw Switches with Center „OFF“ 60° Switching

Dimensions p. 45

1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° ¹						A210-600 A211-600 A212-600 A213-600 WAA913 A361-600 A362-600 WAA363 WAA364 WAA664	1 2 3 4 4 5 6 7 8 8	
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹ 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° ¹						A210-620 A211-620 A212-620 A213-620 WAA913 A361-620 A362-620 WAA363 WAA364 WAA664	1 2 3 4 4 5 6 7 8 8	
1 pole 2 pole 3 pole						A210-621 A211-621 A212-621	1 2 3	
1 pole 2 pole 3 pole						A210-622 A211-622 A212-622	1 2 3	
1 pole 2 pole 3 pole						A210-623 A211-623 A212-623	1 2 3	
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹						A210-624 A211-624 A212-624 A213-624 WAA913	1 2 3 4 4	

[< back to table of contents >](#)

Double-throw Switches with Center „OFF“ 90° Switching

1 pole 2 pole 3 pole 4 pole 1 pole preclose 6° ¹						A218-600 A219-600 WAA299 WAA294	1 2 3 4	
1 pole 2 pole 3 pole 4 pole 1 pole preclose 6° ¹						A218-620 A219-620 WAA299 WAA294	1 2 3 4	

Double-throw Switches with Center „OFF“ and electrically isolated contacts

1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° ¹						A710-600 A711-600 A712-600 A713-600 WAA963	1 2 3 4 4	
1 pole with spring return 2 pole to center						A714-600 A715-600	1 2	

¹For use in a three phase four-wire system with switched neutral. ²Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Double-throw Switches with Spring Return to Center

Dimensions p. 45

1 pole with spring return to center						A214-600 A215-600 A216-600	1 2 3	
1 pole						A214-620 A215-620 A216-620	1 2 3	
1 pole with spring return from left to center						A320-600 A321-600 A322-600	1 2 3	
1 pole						A320-621 A321-621 A322-621	1 2 3	

General Application Switches

1 pole 2 Gang 2 pole Switching sequence: 0, A, A+B 3 pole						A310-600 A312-600 WAA314	1 2 3	
1 pole						A310-620 A312-620 WAA314	1 2 3	
1 pole 3 Gang 2 pole Switching sequence: 0, A, A+B, A+B+C 3 pole						A311-600 WAA313 WAA315	2 3 5	
1 pole						A311-620 WAA313 WAA315	2 3 5	
1 pole 2 Gang 2 pole Series switching 3 pole Switching sequence: 0, A, B, A+B						WAA330 WAA331 WAA332	1 2 3	
1 pole						WAA330 WAA331 WAA332	1 2 3	
2 pole 2 Gang Series-parallel Switching Switching sequence: 0, A+B series, A, A+B parallel						WAA339	2	
						WAA339	2	

[< back to table of contents >](#)

































¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH11 CH12	CH10B- CHR16B			

Coding Switches/Binary Code

[Dimensions p. 45](#)






















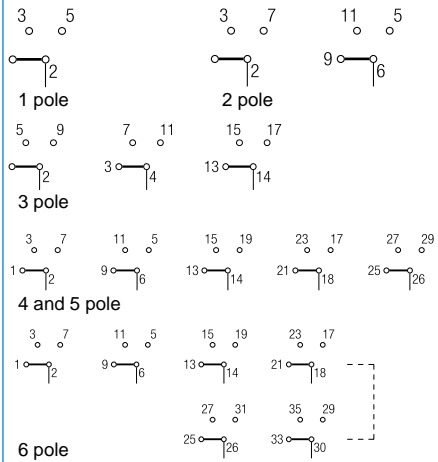





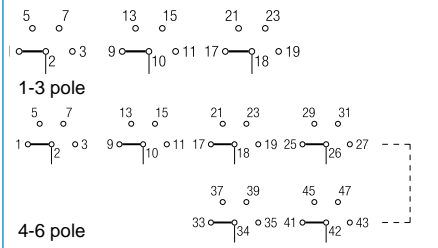











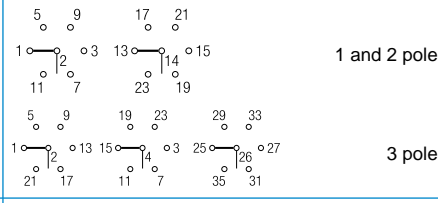




















< back to table of contents >

0 - 7 360° rotation	 F322			A540-600	2	
0 - 7 complement 360° rotation	 F322			WAA541	2	
0 - 7 + complement 360° rotation	 F322			WAA542	3	
0 - 9	 F007			A550-600	2	
0 - 9 complement	 F007			WAA551	2	
0 - 9 + complement	 F007			WAA552	4	
0 - 11 360° rotation	 F009			WAA543	2	
0 - 11 + complement 360° rotation	 F009			WAA545	4	

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Multi-step Switches without „OFF“

Dimensions p. 45

1 pole 3 Step 2 pole 3 pole 4 pole 5 pole 6 pole						A230-600 A250-600 A270-600 A476-600 WAA484 WAA489	2 3 5 6 8 9	 <p>1 pole</p> <p>2 pole</p> <p>3 pole</p> <p>4 and 5 pole</p> <p>6 pole</p>
1 pole 4 Step 2 pole 3 pole 4 pole 5 pole 6 pole						A231-600 A251-600 A271-600 A477-600 WAA485 WAA490	2 4 6 8 10 12	 <p>1-3 pole</p> <p>4-6 pole</p>
1 pole 5 Step 2 pole 3 pole 4 pole						A232-600 A252-600 WAA272 WAA478	3 5 8 10	 <p>1-4 pole</p>
1 pole 6 Step 2 pole 3 pole						A233-600 WAA253 WAA273	3 6 9	 <p>1 and 2 pole</p> <p>3 pole</p>
1 pole 7 Step 2 pole 3 pole						WAA234 WAA254 WAA274	4 7 11	 <p>1-3 pole</p>
1 pole 8 Step 2 pole 3 pole						WAA235 WAA255 WAA275	4 8 12	 <p>1-3 pole</p>
1 pole 9 Step						WAA236	5	
1 pole 10 Step						WAA237	5	
1 pole 11 Step						WAA238	6	
1 pole 12 Step 1 pole 360° rotation						WAA239 WAA639	6 6	

[< back to table of contents >](#)

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Multi-step Switches without „OFF“ with electrically isolated contacts [Dimensions p. 45](#)

1 pole 3 Step						A730-600	2	
2 pole						A750-600	3	
1 pole 4 Step						A731-600	2	
2 pole						A751-600	4	

[< back to table of contents >](#)

Multi-step Switches with „OFF“





























































































1 pole 2 Step						A240-600	1	
2 pole						A260-600	2	
3 pole						A280-600	3	
4 pole						WAA480	4	
5 pole						WAA486	5	
6 pole						WAA491	6	
1 pole						A240-620	1	1-6 pole
2 pole						A260-620	2	
3 pole						A280-620	3	
4 pole						WAA480	4	
5 pole						WAA486	5	
6 pole						WAA491	6	
1 pole 3 Step						A241-600	2	
2 pole						A261-600	3	
3 pole						A281-600	5	
4 pole						WAA481	6	
5 pole						WAA487	8	
1 pole						A241-620	2	
2 pole						A261-620	3	
3 pole						A281-620	5	
4 pole						WAA481	6	
5 pole						WAA487	8	
1 pole						A241-621	2	
2 pole						A261-621	3	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Multi-step Switches with „OFF“

[Dimensions p. 45](#)

1 pole 4 Step 2 pole 3 pole 4 pole						A242-600 WAA262 WAA282 WAA482	2 4 6 8	
1 pole 2 pole 3 pole 4 pole						A242-620 WAA262 WAA282 WAA482	2 4 6 8	1-4 pole
1 pole 5 Step 2 pole 3 pole						A243-600 WAA263 WAA283	3 5 8	
1 pole 2 pole 3 pole						A243-620 WAA263 WAA283	3 5 8	1-3 pole
1 pole 6 Step 2 pole 3 pole						A244-600 WAA264 WAA284	3 6 9	
1 pole 2 pole 3 pole						A244-620 WAA264 WAA284	3 6 9	1-3 pole
1 pole 7 Step 2 pole						WAA245 WAA265	4 7	
1 pole 2 pole						WAA245 WAA265	4 7	1 pole 2 pole
1 pole 8 Step						WAA246	4	
1 pole						WAA246	4	
1 pole 9 Step						WAA247	5	
1 pole						WAA247	5	
1 pole 10 Step						WAA248	5	
1 pole						WAA248	5	
1 pole 11 Step 1 pole 360° rotation						WAA249 WAA649	6 6	
1 pole 1 pole 360° rotation						WAA249 WAA649	6 6	

[< back to table of contents >](#)

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8- CH10- CHR16	CH10B- CHR16B			

Voltmeter Switches without „OFF“

Dimensions p. 45

3 phase 3 wire						A023-600	2	
						A023-620	2	
3 phase 3 wire 3 phase to phase and phase to neutral						A025-600	3	
						A025-620	3	

Voltmeter Switches with „OFF“

2 pole 360° rotation						WAA002	1	
3 phase 3 wire						A004-600	2	
						A004-620	2	
						A004-621	2	
						A004-622	2	
						A004-623	2	
						A004-624	2	
						WAA011	2	










































































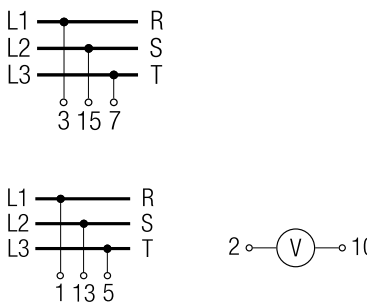



















[< back to table of contents >](#)

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Voltmeter Switches with „OFF“

[Dimensions p. 45](#)

3 phase to neutral						WAA005	2	
	F779					WAA005	2	
						WAA005	2	
	F780					WAA005	2	
						WAA005	2	
	F411-PRL					WAA005	2	
3 phase to phase and 3 phase to neutral						A007-600	3	
	F782					A007-620	3	
						A007-621	3	
	F783					A007-622	3	
						A007-623	3	
	F784					A007-624	3	
2 separate 3 phase with center „OFF“						WAA008	4	
	F786					WAA008	4	
						WAA008	4	
	F787					WAA008	4	
						WAA008	4	
	F418-PRL					WAA008	4	
						WAA008	4	
	F788					WAA008	4	

[< back to table of contents >](#)

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Voltmeter Switches with „OFF“

Dimensions p. 45

3 phase and 1 phase to neutral						WAA010	3	
	F789					WAA010	3	
						WAA010	3	
	F790					WAA010	3	
						WAA010	3	
	F419-PRL					WAA010	3	
						WAA010	3	
	F791					WAA010	3	

Ammeter Switches

[< back to table of contents >](#)

Single pole with one current transformer						WAA046	1	
	F058					WAA046	1	
						WAA046	1	
						WAA046	1	
	F340-PRL					WAA046	1	
Single pole with 3 current transformers without „OFF“						A017-600	3	
	F181-PRL					A017-620	3	
						A017-620	3	
	F719					A017-620	3	
Single pole with 3 current transformers with „OFF“ 360° rotation						A048-600	3	
	F059					A048-620	3	
						A048-621	3	
	F066					A048-622	3	
						A048-622	3	
	F186					A048-623	3	
					A048-623	3		
	F318-PRL					A048-623	3	
						A048-623	3	
	F172-PRL					A048-623	3	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CG8- CH10- CHR16	CH10B- CHR16B			

Ammeter Switches

[Dimensions p. 45](#)

Single pole with 2 current transformers (3 readings)	<p>F172-PRL</p>					A021-600	2	
	<p>F066</p>					A021-620	2	
Single pole with 4 current transformers	<p>F060</p>					WAA036	4	
	<p>F327-PRL</p>					WAA036	4	
2 pole 2 current transformers	<p>F057</p>					WAA037	3	
	<p>F064</p>					WAA037	3	
	<p>F320-PRL</p>					WAA037	3	
2 pole 3 current transformers	<p>F181-PRL</p>					WAA019	5	
	<p>F719</p>					WAA019	5	
2 pole	<p>F059</p>					A038-600	5	
	<p>F172-PRL</p>					A038-620	5	
	<p>F318-PRL</p>					A038-621	5	
2 pole 4 current transformers	<p>F060</p>					WAA039	6	
	<p>F327-PRL</p>					WAA039	6	

























[< back to table of contents >](#)

¹Connection diagrams for CHR switches on request.















































Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Volt-ammeter Switches

Dimensions p. 45

3 phase - phase to phase 3 current	 F101					WAA027	6	
	 F077					WAA028	7	
3 phase voltage 3 phase current 4 wire	 F174-PRL					WAA033	5	
3 phase voltage 3 phase current 3 wire	 F174-PRL					WAA035	5	

Control Switches

Stop switch	 F022					WAA174	1	
Start switch	 F023					A175-600	1	
Stop start switch single pole	 F024					A176-600	1	
Stop start switch 2 pole	 F024					WAA183	2	
Stop start switch with spring return from start to run	 F119					A178-600	1	
	 F130					A178-620	1	
Stop start switch with spring return to run for 2 units	 F121					WAA177	2	
	 F132					WAA177	2	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Control Switches

Dimensions p. 45

Stop start switch with spring return to run with contactor interlock contactors for 2 units						WAA182	2	
						WAA182	2	
Motor voltage control switch						WAA150	2	

Control Switches with electrically isolated contacts

Stop start switch 1 pole						A789-600	1	
Stop start switch with spring return to 1						A791-600	1	
Stop start switch with spring return to run for 2 units						WAA790	2	
Contactor control with spring return to „OFF“						WAA179	2	
						WAA179	2	
Circuit breaker control						WAA537	2	

Control and Alarm Switches¹

With slip clutch and without indicator device						WAA190	5 ²	
Without indicator device						WAA192	2	

¹Advise the indicator device, described in Catalog 101, page 9. ²incl. slip clutch

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Motor Reversing Switches

Dimensions p. 45

2 pole						A400-600	2	
	F071					A400-620	2	
						A400-621	2	
3 pole						A401-600	3	
	F071					A401-620	3	
						A401-621	3	
3 pole with spring return to „OFF“						A228-600	3	
	F025					A228-620	3	
3 pole for use with reversing contactors						WAA402	4	
	F121							

< back to table of contents >

Motor Control Switches

2 speed 2 winding 0-A-BY or Δ						WAA451	3	
	F073					WAA451	3	
3 speed 2 winding 0-AΔ-BY-AY						WAA457	6	
	F109					WAA457	6	

¹Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Motor Control Switches

[Dimensions p. 45](#)

2 speed single winding						A440-600	4	
						A440-620	4	
2 speed single winding without „OFF“						A466-600	4	
2 speed single winding with center „OFF“						A441-600	4	
						A441-620	4	
2 speed single winding reversing						A442-600	6	
						A442-620	6	
2 speed single winding for use with contactors						WAA444	5	
						WAA444	5	
2 speed reversing for 2 way operation with slip clutch for „OFF“ load use						WAA468	10 ²	
						WAA468	10 ²	






























[< back to table of contents >](#)

¹Connection diagrams for CHR switches on request. ²incl. slip clutch

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram ¹
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			





























Star-delta Switches

Dimensions p. 45

OFF-star-delta						A410-600	4	
						A410-620	4	
Reversing						WAA413	5	
With auxiliary contact closed in „OFF“ position						WAA416	5	
For use with reversing contactors						A419-600	4	





[< back to table of contents >](#)

Start and Run Switches

Split-phase start						A425-600	2	
						A425-620	2	
Split-phase start reversing						WAA426	3	
						WAA426	3	
Split-phase reversing auto cutout of start field winding						WAA622	3	

¹Connection diagrams for CHR switches on request.

Two or Four Hole Panel Mounting	Terminals rotated 90°	Code	CG4-CHR6	CG8-CHR16	CH10B-CHR16B
--	-----------------------	-------------	----------	-----------	--------------

Panel mounting						
	<p>Two hole panel mounting, Protection IP 40</p> <p>Two hole panel mounting, Protection IP 66/67/69k</p>	●	E E-V	● ●		
	<p>Four hole panel mounting, Protection IP 40</p> <p>Four hole panel mounting, Protection IP 66/67/69k</p>	●	EF EF-V	● ●		
	<p>Two hole panel mounting, Protection IP 66/67/69k</p>	●	E22 E22-V	● ●		
Panel mounting using larger escutcheon plate and handle and with heavy duty latching						
	<p>Four hole panel mounting, Protection IP 40</p> <p>Four hole panel mounting, Protection IP 66/67/69k</p>		EG EGF		● ●	

[< back to table of contents >](#)

Two Hole Panel Mounting or Mosaic Mounting	Code	CG4-CHR6
--	------	----------

Panel mounting with round shaft for combining with commercial radio knobs



Two hole panel mounting, Protection IP 40
Shaft diam. 6 mm/.24 inch

E9



Two hole panel mounting, Protection IP 40
Shaft diam. 6,35 mm/.25 inch

E91



Mosaic mounting

For Siemens-Mosaic 30 mm grid depth, Protection IP 40

E92



For Subklew-, Kreutzenbeck-, Symo-Mosaic, Protection IP 40
28 mm 25 mm 25 mm grid depth

E93




For Mauell-Mosaic 30 mm grid depth, Protection IP 40

E94







Two or Four Hole Panel Mounting	Code	CG8-CHR16	CH10B-CHR16B
--	-------------	-----------	--------------

	<p>Panel mounting with heavy duty latching and metal shaft</p> <p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size S0</p>	KN2	●	
	<p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size S1</p>	KN1	●	●
	<p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size S1 and 6 mm square metal shaft</p>	KD1	●	●
<p>Panel mounting with protective cover</p>				
	<p>Four hole panel mounting Protection front IP 40 rear IP 30</p>	EC	CH CHR	●
	<p>Four hole panel mounting with additional shaft seal Protection front IP 65 rear IP 30</p>	ED	CH CHR	●
	<p>Four hole panel mounting Protection front IP 40 rear IP 42</p>	EC1		●
	<p>Four hole panel mounting with additional shaft seal Protection front IP 66/67/69k rear IP 42</p>	ED1		●
	<p>Two hole panel mounting Protection front IP 66/69k rear IP 42</p>	ED22	●	




[< back to table of contents >](#)

Single Hole Mounting	Terminals rotated 90°	Code	CG4-CHR6	CG8-CHR16
----------------------	-----------------------	------	----------	-----------

[< back to table of contents >](#)

			mm	mm
	<p>With locking nut and shaft seal</p>			
	<p>Without escutcheon plate, Protection IP 66/67/69k</p>	●	FS1	16/22
		●	FS1-V	16/22
		●	FT1	22
		●	FT1-V	22
		●	FT3	22/30
		●	FT3-V	22/30
	<p>With square escutcheon plate, Protection IP 66/67/69k</p>	●	FS2	16/22
		●	FS2-V	16/22
		●	FT2	22
		●	FT2-V	22
		●	FT4	22/30
		●	FT4-V	22/30
	<p>With size S1 square escutcheon plate and heavy duty latching, Protection IP 66/67/69k</p>	●	FH3	22
			FH3-V	22
	<p>With rectangular escutcheon plate, Protection IP 66/67/69k</p>	●	FS4	16/22
		●	FS4-V	16/22
		●	FT6	22
		●	FT6-V	22
	<p>With size S1 rectangular escutcheon plate and heavy duty latching, Protection IP 66/67/69k</p>	●	FH4	22
			FH4-V	22
	<p>Mounting key for locking nut</p>		S00 T170 09	

Base Mounting	Terminals rotated 90°	Code	CG4- CGD4-1	CG8- CHR16
---------------	-----------------------	------	----------------	---------------

Base mounting					
	<p>Base mounting - four hole, Protection IP 40</p>	●	VE VE-V		● ●
	<p>For four hole base mounting and with integrated simplified door clutch, Protection IP 65</p>	●	VF VF-V		● ●
	<p>For two hole base mounting, Protection IP 40</p>	●	VE22 VE22V		● ●
	<p>For two hole base mounting and with integrated simplified door clutch, Protection IP 65</p>	●	VF22 VF22V		● ●
	<p>Snap-on base mounting for track EN 60715, Protection IP 40</p>		VE1		●
	<p>Snap-on base mounting for track EN 60715, Escutcheon plate can be fastened by screws at the switch, Protection IP 40</p>		VE1E	●	●
	<p>Snap-on base mounting for track EN 60715, Escutcheon plate fastened by single hole mounting at the switch e.g. for combining with key-lock device, Protection IP 66/67/69k</p>		VE1F	●	●

[< back to table of contents >](#)

Base Mounting	Code	CG4- CGD4-1	CG8- CHR16
----------------------	-------------	----------------	---------------

Base mounting



Snap-on base mounting for track EN 60715 with rectangular escutcheon plate for 45 mm standard knock-out, Protection IP 40

VE2




Snap-on base mounting for track EN 60715, both the escutcheon plate for 45 mm standard knock-out and the handle are adjustable in height, Protection IP 40

VE21



< back to table of contents >

Escutcheon Plates

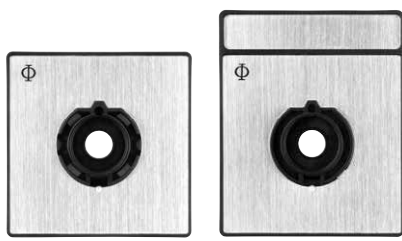

Square and rectangular escutcheon plates are available for each size of switch. The escutcheon plate consists of a frame and a faceplate having the switch positions which is then embossed with hot-foil backing. The escutcheon plate frame is an essential part of the switch and serves as a bearing surface for the handle. If the switch is to be mounted without an escutcheon plate we would recommend for size S1 the handle bearing plate T100-04.

Standard Letterings Available

(Over 500 standard letterings, special letterings upon request.)

30° switching

F022	F141	F158	F703	F023	F137	F142	F159	F701	F704	F152	F709	F026	F035	F153	F169	F024	F143
F160	F221	F222	F224	F025	F034	F036	F037	F038	F039	F139	F144	F147	F149	F150	F151	F219	F258
F259	F273	F280	F329	F384	F708	F053	F161	F297	F298	F306	F307	F001	F040	F052	F229	F355	F018
F019	F029	F030	F154	F155	F165	F166	F183	F184	F301	F302	F321	F332	F333	F334	F335	F334	F335
F712	F002	F021	F033	F041	F055	F305	F319	F054	F003	F042	F138	F255	F299	F308	F353	F350	F351
F004	F014	F017	F020	F027	F028	F031	F032	F043	F049	F135	F156	F157	F162	F167	F168	F187	F189
F303	F304	F336	F337	F347	F348	F710	F713	F714	F734	F005	F044	F136	F140	F702	F006	F010	F045
F015	F050	F007	F011	F046	F008	F012	F047	F016	F051	F009	F013	F048	F748				

45° switching

F747	F295	F742	F743	F215	F216	F738	F744	F746	F792	F793	F107	F109	F114	F115	F212	F213	F214
F217	F267	F289	F330	F375	F376	F383	F408	F409	F410	F411	F412	F413	F426	F427	F430	F729	F752
F775	F776	F777	F778	F779	F780	F781	F796	F797	F798	F105	F108	F112	F113	F117	F118	F293	F429
F739	F741	F419	F789	F790	F791	F794	F795	F110	F106	F116	F294	F317	F414	F415	F416	F417	F418
F782	F783	F784	F785	F786	F787	F788	F799	F111	F210	F211	F284	F285	F296	F322	F727	F740	

back to table of contents >

Escutcheon Plates

60° switching

F070	F087	F088	F089	F133	F197	F198	F232	F243	F247	F263	F268	F310	F311	F323	F328	F352	F367
F379	F380	F470	F754	F072	F163	F164	F192	F193	F196	F230	F231	F234	F244	F257	F262	F264	F282
F288	F291	F313	F382	F441	F705	F721	F722	F750	F757	F758	F075	F076	F098	F220	F223	F356	F357
F377	F723	F071	F073	F080	F081	F085	F086	F090	F091	F092	F093	F094	F104	F194	F235	F237	F239
F240	F241	F249	F260	F269	F274	F281	F290	F292	F312	F314	F315	F316	F324	F331	F344	F354	F358
F359	F364	F370	F371	F373	F381	F385	F442	F444	F469	F732	F735	F759	F077	F100	F101	F102	F309
F342	F343	F361	F362	F363	F365	F366	F078	F191	F325	F326	F720	F074	F082	F096	F097	F195	F724
F256	F079	F083	F084	F095	F099	F185	F190	F199	F233	F236	F238	F242	F283	F725	F730	F731	F736
F737																	

[< back to table of contents >](#)

90° switching

F056	F063	F068	F134	F201	F251	F252	F346	F456	F058	F065	F069	F177	F178	F182	F208	F253	F254
F340	F360	F378	F458	F443	F700	F743	F057	F061	F064	F067	F171	F181	F205	F207	F209	F320	F349
F437	F445	F715	F719	F059	F060	F062	F066	F170	F172	F173	F174	F175	F176	F179	F180	F186	F188
F202	F204	F206	F250	F265	F266	F286	F318	F327	F338	F339	F425	F716	F717	F718	F726	F733	F751
F755	F756																

Miscellaneous






F119	F130	F122	F126	F125	F129	F225	F248	F246	F261	F341	F345	F287	F123	F127	F145	F146	F148						
F706	F707	F245	F120	F124	F128	F131	F121	F132	F749									F990	F991	F801	F802	F803	F804
F823	F824	F825	F826	F827	F828	F829	F830	F831	F832	F833	F834	F835	F837	F838	F839	F840	F841						





¹INTERRUPTEUR PRINCIPAL, OUVERTURE EN POSITION 0 ²INTERRUPTORE GENERALE, APRIRE SOLO CON MANIGLIA SU 0
³INTERRUPTOR PRINCIPAL, ABRIR ARMARIO SOLO EN POS. "0"

Handles

Type	Color	Code	Size		
			S00	S0	S1
















Type	Color	Code	Size		
			S00	S0	S1

<p>R-Handle</p> 	black red white electro-gray	G001 G002 G003 G007	— — — —	● ● ● ●	● ● ● ●
<p>F-Handle</p> 	black red white electro-gray	G221 G222 G223 G227	● ● ● ●	● ● ● ●	● ● ● ●
<p>S-Handle</p>  <p>S0 S1</p>	black red white electro-gray	G301 G302 G303 G307	— — — —	● ● ● ●	● ● ● ●
<p>P-Handle</p>  <p>S0 S1</p>	black red white electro-gray	G211 G212 G213 G217	— — — —	● ● ● ●	● ● ● ●
<p>O-Handle</p> 	black red white electro-gray	G321 G322 G323 G327	— — — —	— — — —	● ● ● ●

<p>I-Handle</p>  <p>S00 S0, S1</p>	black red white electro-gray	G251 G252 G253 G257	● ● ● ●	● ● ● ●	● ● ● ●
<p>B-Handle</p> 	black red white electro-gray	G521 G522 G523 G527	— — — —	● ● ● ●	● ● ● ●
<p>L-Handle</p> 	black red white electro-gray	G501 G502 G503 G507	— — — —	— — — —	● ● ● ●
<p>K-Handle</p> 	black red white electro-gray	G411 G412 G413 G417	— — — —	— — — —	● ● ● ●

[< back to table of contents >](#)

International Standards and Approvals

Country	Authority	Mark or Standard					CH6	CH10	CH16	CHR6	CHR10	CHR16
			CG4	CG4-1	CG6	CG8	CH11	CH12	CH10B	CHR11	CHR12	CHR10B
USA	Underwriters Laboratories	 ¹							●		●	
		 ² ₃	●	●	●	●	●	●	●			
Canada	Canadian Standards Association	 ⁶	●	CG4-1	●	●	●	●	●	●	●	
		 ¹ _c							●		●	
		 ² ₃ _c	●	●			●	●				
Switzerland	Schweizerischer Elektrotechnischer Verein		●	+	+	+	+	+	+	+	+	
Denmark	Danmarks Elektriske Materielkontrol		+	+	+	+	+	+	+	+	+	
Norway	Norges Elektriske Materielkontrol		+	+	+	+	+	+	+	+	+	
Sweden	Svenska Elektriska Materielkontrollanstalten		+	+	+	+	+	+	+	+	+	
Finland	Sähkötar-kastuskeskus		+	+	+	+	+	+	+	+	+	
Austria	Österreichischer Verband für Elektrotechnik		+	+	+	+	+	+	+	+	+	
Federal Republic of Germany	Verband Deutscher Elektrotechniker	VDE 0660 ⁴	+	+	+	+	+	+	+	+	+	
Great Britain	British Standards Institution	BS EN 60947 ⁴	+	+	+	+	+	+	+	+	+	
International Electrical Commission (IEC) Recommendation		IEC 60947 ⁵	+	+	+	+	+	+	+	+	+	
China	China Quality Certification Centre	 GB14048.3	●	CG4-1			CH10 CH10B	●	CHR10 CHR10B	●		
Russia Belarus Kazakhstan	Eurasian Conformity		●	● +	●	●	●	●	●	●		
Germanischer Lloyd			+	+	+	+	+	+	+	+		
Lloyds Register EMEA			+	+	+	+	CH10 CH10B	●	+	+		

● Switch approved + Switch conforms to requirements

¹Approved under the "Component Program" (UL-Recognized Industrial Component). File No. E35541, Category Control No. NLRV2 (U.S.) resp. NLRV8 (Canada).

²Approved under the "Listing Program". File No. E35541, Category Control No. NLRV (U.S.) resp. NLRV7 (Canada).

³Switch types CGD4-1, CH11, CH12, CHR11, CHR12 approved under the "Listing Program". File No. E60262, Category Control No. NRNT (U.S.) resp. NRNT7 (Canada).

⁴It is not required for Industrial Switchgear to bear a symbol but must conform to requirements. By stating the specific standard no. on the product the manufacturer declares that all requirements of the product standard are met.

⁵IEC does not operate an approval scheme.

⁶File No. 13002, Class No. 3211-05 resp. 4652-04.

Selection Data	CG4	CG6	CH6	CHR6		
	CG4-1	CG8	CH10 CH10B	CHR10 CHR10B	CH16 CH16B	CHR16 CHR16B

Rated Insulation Voltage U_e	IEC 60947-3, EN 60947-3 ¹ VDE 0660 part 107 ¹	V	440	690	690	690	690	690
	SEV max.	V	400	690	–	–	–	–
	UL/Canada ²	V	300	300	600	600	600	600
	CEE 24	V	380	380	–	–	–	–
	min. voltage	V	on request					
Rated Impulse Withstand Voltage U_{imp}^1		kV	4	6	6	6	6	6
Rated Thermal Current I_u/I_{th}	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	10	20	20	20	25	25
	SEV max.	A	10	20	–	–	–	–
	UL/Canada	A	10	16	20	20	25	25
Rated Operational Current I_e								
AC-21A Switching of resistive loads, including moderate overloads	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	10	20	20	20	25	25
AC-1 Resistive or low inductive loads	SEV 400 V	A	10	–	–	–	–	–
	500 V	A	–	–	–	–	–	–
	600 V	A	–	–	–	–	–	–
AC-22A Switching of combined resistive or low inductive loads including moderate overloads	IEC 60947-3 220 V-440 V	A	10	20	20	20	25	25
	VDE 0660, 500 V	A	–	20	20	20	25	25
	part 107 660 V-690 V	A	–	16	16	16	25	25
AC-15 Switching of control devices, contactors, valves etc.	IEC 60947-5, EN 60947-5-1 110 V	A	2,5	6	5	5	8	8
	VDE 0660, 220 V-240 V	A	2,5	5	5	5	8	8
	part 200 380 V-440 V	A	1,5	4	4	4	5	5
Pilot Duty	UL/Canada ² Heavy		A300	A300	A600	A600	A600	A600
Ampere Rating Resistive or low inductive loads	UL/Canada ²	A	10	16 (150 V) 10 (300 V)	20	20	25	25
Resistive load/Motor load	CEE 24 ²	A	4/2	10/6	–	–	–	–
	NEMKO/FI ²	A	6/4 ⁴	10/6	–	–	–	–
Breaking capacity	220 V-240 V	A	50	150	150	150	200	200
	380 V-440 V	A	50	150	150	150	200	200
	660 V-690 V	A	–	80	80	80	125	125
Power loss per contact at I_u		W	0,4/0,7	0,8	1,4	1,4	2,3	2,3
Resistance to vibration					on request			
Resistance to shock					min. 5 g, 30 ms			
Short Circuit Protection								
Max. fuse size (gG-characteristic)		A	10	25	25	25	35	35
Rated short-time withstand current (1s-current)		A	90	140	200	200	250	250
DC Switching Capacity⁶								
No. of series contacts	1 2 3 4 5 6 8							
	Voltage V							
Resistive loads $T \leq 1$ ms	24 48 70 95 120 145 190	A	CG4	CG6	CH6	CHR6		
	48 95 140 190 240 290 350		CG4-1	CG8	CH10	CHR10	CH16	CHR16
	60 120 180 240 300 360 450				CH10B	CHR10B	CH16B	CHR16B
	110 220 330 440 550 660 –			CG8S ³				
	220 440 660 – – – –							
440 660 – – – – –								
Inductive loads $T = 50$ ms	24 48 70 95 120 145 190	A	CG4	CG6	CH6	CHR6		
	30 60 90 120 150 180 240		CG4-1	CG8	CH10	CHR10	CH16	CHR16
	48 95 140 190 240 290 350				CH10B	CHR10B	CH16B	CHR16B
	60 120 180 240 300 360 450							
	110 220 330 440 550 660 –							
Min. Ambient Temperature of Stages			-25 °C (valid only without optional extra)					
Max. Ambient Temperature of Stages^{5,7}	open at 100 % I_u/I_{th} enclosed at 100 % I_{the}		55 °C during 24 hours with peaks up to 60 °C 35 °C during 24 hours with peaks up to 40 °C					

[< back to table of contents >](#)

¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request. ²International Standards and Approvals, refer to page 35. ³Valid only for max. 4 simultaneously opening contacts. ⁴Valid for CG4 only. ⁵For electromagnetic optional extras see additional data in Catalog 101. ⁶Values for switches with spring return on request. ⁷Storage temperature: -40 °C to 85 °C (in case of temperature below -5 °C no shock load permissible).

Selection Data	CG4	CG6	CH6	CHR6	CH16	CHR16
	CG4-1	CG8	CH10 CH10B	CHR10 CHR10B	CH16B	CHR16 CHR16B

[< back to table of contents >](#)

Rated Utilization Category		IEC 60947-3, EN 60947-3 VDE 0660 part 107									
AC-2	Slip ring motor starting, reversing and plugging, star-delta starting (CG4-CHR10B)	3 phase	220 V-240 V	kW	2,5	4	4	4	5,5	5,5	
		3 pole	380 V-440 V		4,5	7,5	7,5	7,5	11	11	
			500 V		–	10	10	10	15	15	
			660 V-690 V		–	10	10	10	13	13	
AC-3	Direct-on-line starting, star-delta starting (CH16-CHR16B)	3 phase	220 V-240 V	kW	1,5	3	3	3	4	4	
		3 pole	380 V-440 V		2,2	5,5	5,5	5,5	7,5	7,5	
			500 V		–	5,5	5,5	5,5	7,5	7,5	
			660 V-690 V		–	5,5	5,5	5,5	7,5	7,5	
		1 phase	110 V-120 V	kW	0,3	0,6	0,6	0,6	1,5	1,5	
	2 pole	220 V-240 V	0,55		2,2	2,2	2,2	3	3		
		380 V-440 V	0,75		3	3	3	3,7	3,7		
		500 V	–		–	3	3	4	4		
		660 V-690 V	–	–	3	3	3,7	3,7			
AC-4	Direct-on-line starting, reversing, plugging and inching	3 phase	220 V-240 V	kW	0,37	0,55	0,55	0,55	1,5	1,5	
		3 pole	380 V-440 V		0,55	1,5	1,5	1,5	3	3	
			500 V		–	1,5	1,5	1,5	3	3	
			660 V-690 V	–	1,5	1,5	1,5	3	3		
		1 phase	110 V-120 V	kW	0,15	0,3	0,3	0,3	0,45	0,45	
	2 pole	220 V-240 V	0,25		0,75	0,75	0,75	1,1	1,1		
	380 V-440 V	0,5	1,5		1,5	1,5	2,2	2,2			
AC-23A	Frequent switching of motors or other high inductive loads	3 phase	220 V-240 V	kW	1,8	3,7	3,7	3,7	5,5	5,5	
		3 pole	380 V-440 V		3	7,5	7,5	7,5	11	11	
			500 V		–	7,5	7,5	7,5	11	11	
			660 V-690 V	–	7,5	7,5	7,5	11	11		
		1 phase	110 V-120 V	kW	0,37	0,75	0,75	0,75	1,5	1,5	
	2 pole	220 V-240 V	0,75		2,5	2,5	2,5	3	3		
	380 V-440 V	1,1	3,7		3,7	3,7	5,5	5,5			
		500 V	–	–	4	4	5,5	5,5			
		660 V-690 V	–	–	4	4	5,5	5,5			
Ratings	Standard motor load DOL-Rating (similar AC-3)	3 phase	110 V-120 V	HP	0,75	1,5	1,5	1,5	2	2	
		3 pole	220 V-240 V		1	1	3	3	5	5	
			440 V-600 V		–	–	5	5	10	10	
			1 phase	110 V-120 V	HP	0,33	0,5	0,5	0,5	1	1
		2 pole	220 V-240 V	0,75		1	1	1	2	2	
			277 V	0,75		1	2	2	3	3	
			440 V-600 V	–	–	2	2	5	5		
	Heavy motor load Reversing-Rating (similar AC-4)	3 phase	110 V-120 V	HP	–	0,5	0,5	0,5	1	1	
		3 pole	220 V-240 V		–	1	1	1	2	2	
			440 V-600 V		–	–	3	3	5	5	
			1 phase	110 V-120 V	HP	–	0,17	0,17	0,17	0,33	0,33
		2 pole	220 V-240 V	–		0,5	0,5	0,5	0,75	0,75	
		277 V	–	0,5		0,6	0,6	1	1		
		440 V-600 V	–	–	1,5	1,5	2	2			
Max. Permissible Wire Gage - Use copper wire only	Single-core or stranded wire		mm ²	2x1,5	2x2,5	2x4		2x4			
			AWG	2x14	2x12	2x10		2x10			
	Flexible wire (sleeving in accordance with DIN 46228)		mm ²	2x1,5(1)	2x2,5(2,5)	2x2,5(2,5)		2x2,5(2,5)			
	Flexible AWG wires (without sleeve)		AWG	2x16	2x14	2x12		2x12			
	Connection with insulated ring and fork type terminals		mm					≥3,6	≥3,6		
	Internal diameter		mm					≤8,6	≤8,6		
	External diameter		mm					6,3	6,3		
Connection with quick connect terminations		mm									

Selection Data	CGD4-1	CH11	CHR11	CH12	CHR12
-----------------------	--------	------	-------	------	-------


Rated Insulation Voltage U_e		IEC 60947-3, EN 60947-3 ¹ VDE 0660 part 107 ¹	V	440	600	600	600	600		
		North America	V	300	300	300	300	300		
		min. voltage	V	1 ⁴	1 ⁴	1 ⁴	6	6		
Rated Impulse Withstand Voltage U_{imp}				on request						
Rated Thermal Current I_U/I_{th}		IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	5	6	6	6	6		
		North America	A	5	6	6	6	6		
Rated Operational Current I_e		IEC 60947-3, EN 60947-3 VDE 0660 part 107								
AC-21A	Switching of resistive loads, including moderate overloads	North America ²	1 V/6 V	A	5/2	6/3	6/3	-/6	-/6	
			12 V/24 V	A	1,2/0,7	2/1	2/1	6/5	6/5	
			48 V/60 V	A	0,45/-	0,8/0,7	0,8/0,7	4/3,5	4/3,5	
			110 V	A	0,25	0,4	0,4	3	3	
			240 V	A	0,15	0,2	0,2	1,8	1,8	
			300 V	A	0,13	0,13	0,13	1,3	1,3	
			440 V	A	0,1	0,1	0,1	1	1	
			500 V	A	-	0,08	0,08	0,8	0,8	
				600 V	A	-	0,05	0,05	0,5	0,5
Power loss per contact at I_U			W	0,4	0,4	0,4	0,2	0,2		
Short Circuit Protection										
Max. fuse size		(glass-tube, quick)	A	5	6	6	6	6		
Rated short-time withstand current		(1s-current)	A	30	35	35	50	50		
DC Switching Capacity⁵		IEC 60947-3, EN 60947-3 VDE 0660 part 107								
DC-21B	Resistive load $T \leq 1$ ms	North America ²	1 V/6 V	A	3/1,2	4/2,5	4/2,5	-/4	-/4	
			12 V/24 V	A	0,7/0,4	1,5/0,8	1,5/0,8	3/2,2	3/2,2	
			48 V/60 V	A	0,25/0,2	0,3/0,27	0,3/0,27	1,2/1	1,2/1	
			110 V/240 V	A	0,13/0,08	0,2/0,1	0,2/0,1	0,6/0,3	0,6/0,3	
			300 V/440 V	A	0,07/0,05	0,07/0,05	0,07/0,05	0,2/0,15	0,2/0,15	
			500 V/600 V	A	-	0,03/0,02	0,03/0,02	0,1/0,1	0,1/0,1	
Max. Permissible Wire Gage - Use copper wire only										
Single-core or stranded wire			mm ²	2x1,5	2x4		2x4			
			AWG	2x14	2x10		2x10			
Flexible wire (sleeving in accordance with DIN 46228)			mm ²	2x1,5(1)	2x2,5(2,5)		2x2,5(2,5)			
Flexible AWG wires (without sleeve)			AWG	2x16	2x12		2x12			
Connection with insulated ring and fork type terminals			mm			≥3,6		≥3,6		
Internal diameter			mm			≤8,6		≤8,6		
External diameter			mm			6,3		6,3		
Connection with quick connect terminations										
Max. Ambient Temperature of Stages				-25 °C (valid only without optional extra)						
Max. Ambient Temperature of Stages^{3, 6}		open at 100 % I_U/I_{th}		55 °C during 24 hours with peaks up to 60 °C						
		enclosed at 100 % I_{the}		35 °C during 24 hours with peaks up to 40 °C						

[< back to table of contents >](#)


¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.
²max. 300 V. ³For electromagnetic optional extras see additional data in Catalog 101. ⁴Values for lower voltages on request. ⁵Values for switches with spring return on request. ⁶Storage temperature: -40 °C to 85 °C (in case of temperature below -5 °C no shock load permissible).

Two or Four Hole Panel Mounting


[< back to table of contents >](#)




E
for
CG4-CGD4-1
CH6/CHR6
E-V
for
CG6




E
E-V




E-V
for
CG4-CGD4-1
CH6/CHR6
E
for
CG6




	CG4 CG4-1 CGD4-1	CG6	CG8	CH6 CHR6	CH10- CHR16	CH10B- CHR16B
A	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89	64 2.52
B	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	56 2.20
C	4 .16	4 .16	4 .16	4 .16	4 .16	4 .16
D1	3,2 .13	3,2 .13	5 .20	3,2 .13	5 .20	5 .20
D2	8-11 .31-.43	8-11 .31-.43	8-19 .59-.75	8-11 .31-.43	8-19 .59-.75	10-22 .39-.87
E	-	-	36 1.42	-	36 1.42	48 1.89




EF
for
CG4-CGD4-1
CH6/CHR6
EF-V
for
CG6




EF
EF-V




EF-V
for
CG4-CGD4-1
CH6/CHR6
EF
for
CG6




	CG4 CG4-1 CGD4-1	CG6	CG8	CH6 CHR6	CH10- CHR16	CH10B- CHR16B
A	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89	64 2.52
B	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	56 2.20
C	4 .16	4 .16	4 .16	4 .16	4 .16	4 .16
D1	3,2 .13	3,2 .13	5 .20	3,2 .13	5 .20	5 .20
D2	8-11 .31-.43	8-11 .31-.43	15-19 .59-.75	8-11 .31-.43	15-19 .59-.75	19-22 .75-.87
E	-	-	36 1.42	-	36 1.42	48 1.89
M	1 .04	1 .04	-	1 .04	-	-



E22
for
CG
E22-V
for
CH/CHR



E22-V
for
CG
E22
for
CH/CHR




	CG8	CH10- CHR16
A	48 1.89	48 1.89
B	38 1.50	46 1.81
C	4 .16	4 .16
D1	5 .20	5 .20
E	30 1.17	30 1.17

¹see page 45


Four Hole Panel Mounting or Mosaic Mounting

**EG
EGF**

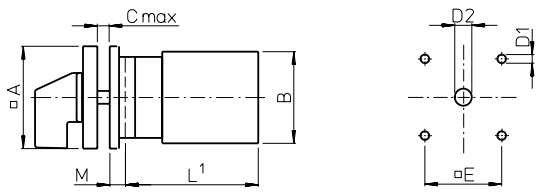


	CG8	CH10- CHR16
A	64 2.52	64 2.52
B	38 1.50	46 1.81
C	4 .16	4 .16
D1	5 .20	5 .20
EG D2	10-22 .39-.87	10-22 .39-.87
EGF D2	19-22 .75-.87	19-22 .75-.87
E	48 1.89	48 1.89
M	6,7 .26	6,7 .26


**E9
E91**

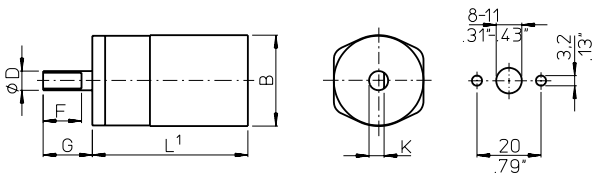

**for
CG6**




E92

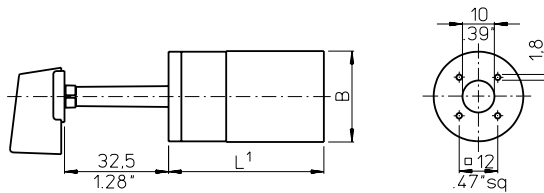

	CG4 CG4-1 CGD4-1	CG6	CH6 CHR6
--	------------------------	-----	-------------

B	28 1.10	38 1.50	46 1.81
----------	------------	------------	------------

**E93
E94**

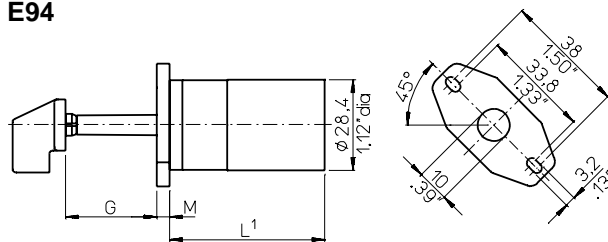


	E9	E91	E92	E93	E94
--	----	-----	-----	-----	-----


D	6 .24	6,35 .25	-	-	-
F	12 .47	12,8 .50	-	-	-
G	15,4 .61	17,4 .69	32,5 1.28	28,5 1.12	32,5 1.28
K	4,7 .19	5,5 .22	-	-	-
M	-	-	-	4 .16	-

¹see page 45


Two or Four Hole Panel Mounting



**EC
ED
EC1
ED1**



ED22





< back to table of contents >

	CH10- CG8	CH10- CHR16	CH10B- CHR16B	
	ED22	EC ED	ED22	EC ED
		ED1		ED1
A	48 1.89	64 2.52	48 1.89	64 2.52
B	74 2.91	68 2.68	74 2.91	68 2.68
C	-	4 .16	-	4 .16
C	4 .16	4 .16	4 .16	4 .16
D1	5 .20	5 .20	5 .20	5 .20
D2	-	10-19 .39-.75	-	10-22 .39-.87
D2	11-15 .43-.59	19-22 .75-.87	11-15 .43-.59	19-22 .75-.87
E	-	48 1.89	-	48 1.89
F	30 1.17	-	30 1.17	-
M	1.5 .06	-	1.5 .06	-
Fluchten L				
1	74,3 2,93	-	74,3 2,93	- 2,86
2	74,3 2,93	-	74,3 2,93	- 2,86
3	94,3 3,71	-	94,3 3,71	- 3,65
4	94,3 3,71	104 4,10	94,3 3,71	114,5 4,51
5	94,3 3,71	-	-	127 5,00
6	-	-	-	139,5 5,49
7	-	-	-	164,5 6,48
8	-	-	-	177 6,97
9	-	-	-	-
10	-	-	-	-

Four Hole Panel Mounting or Single Hole Mounting

KN1
KD1
KN2







	KN2		KN1			
	CG8	CH10-CHR16	KD1	CG8	CH10-CHR16	CH10B-CHR16B
A	48 1.89	48 1.89	A	64 2.52	64 2.52	64 2.52
B	38 1.50	46 1.81	B	38 1.50	46 1.81	56 2.20
C	4 .16	4 .16	C	4 .16	4 .16	4 .16
D1	5 .20	5 .20	D1	5 .20	5 .20	5 .20
D2	8-15 .31-.59	8-15 .31-.59	D2	10-22 .39-.87	10-22 .39-.87	10-22 .39-.87
E	36 1.42	36 1.42	E	48 1.89	48 1.89	48 1.89
M	5,2 .20	5,2 .20	M	4,7 .19	4,7 .19	7 .28

FS1...
FT1...
FT3...

FH3...
FS2...
FT2...
FT4...






FH4...
FS4...
FT6...



FS1...
FS2...
FS4...

FH3...
FH4...
FT1...
FT2...
FT6...

FT3...
FT4...




	CG4		CH6		CH10-
	CG4-1	CG6	CG8	CHR6	CHR16
A/E	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89
FH3...	-	-	64 2.52	-	64 2.52
FH4...	-	-	64 2.52	-	64 2.52
B	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81
C	5 .20	5 .20	6 .24	5 .20	6 .24
D	29,5 1.16	29,5 1.16	39 1.54	29,5 1.16	39 1.54
F	39 1.54	39 1.54	59 2.32	39 1.54	59 2.32
FH4...	-	-	78,5 3.09	-	78,5 3.09
M	12,5 .49	12,5 .49	18,2 .72	12,5 .49	18,2 .72
FH3...	-	-	25,2 .99	-	25,2 .99
FH4...	-	-	25,2 .99	-	25,2 .99


¹see page 45

Base Mounting


**VE
VE-V**

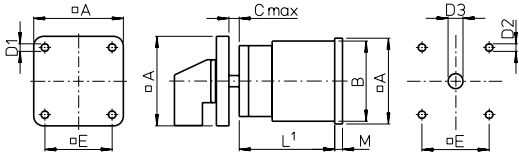


**VF
VF-V**

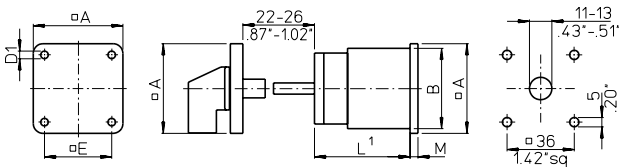

**VE22
VE22V**

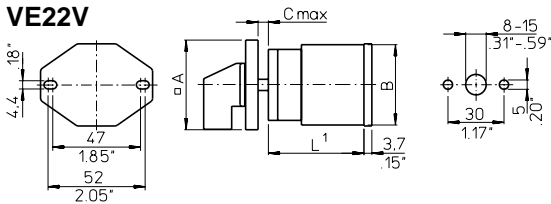

**VF22
VF22V**

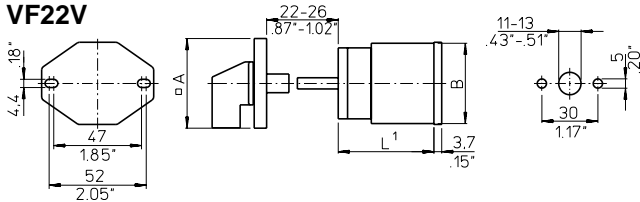


CG8 CH10-CHR16


A²	48 1.89	48 (64) 1.89 (2.52)
B	38 1.50	46 1.81
C	10,5 .41	10,5 .41
D1	4,1 .16	4,1 .16
D2	5 .20	5 .20
D3	8-15 .31-.59	8-15 .31-.59
E²	36 1.42	36 (48) 1.42 (1.89)
M	2,2 .09	5,2 .20

²Dimensions in () for revertive mounting plate


VE1

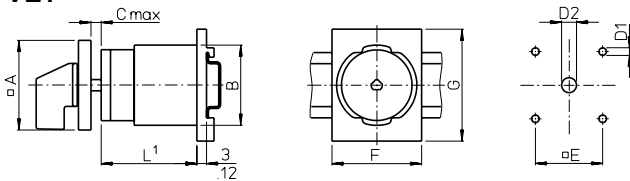

VE1E

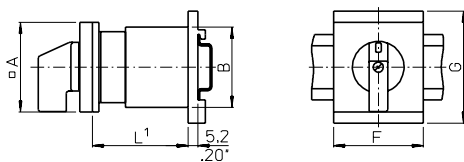

VE1F

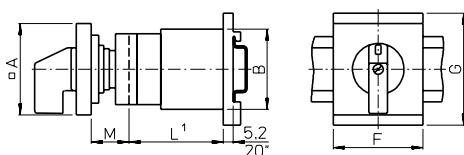


CG4
CG4-1 CG8 CH10-CHR16
CGD4-1

A	30 1.18	48 1.89	48 1.89
B	28 1.10	38 1.50	46 1.81
C	-	10,5 .41	10,5 .41
D1	-	5 .20	5 .20
D2	-	8-15 .31-.59	8-15 .31-.59
E	-	36 1.42	36 1.42
F	35,5 1.40	48 1.89	48 1.89
G	60 2.36	60 2.36	60 2.36
M	12,5 .49	20 .79	20 .79


¹see page 45

Base Mounting and Escutcheon Plates


VE2

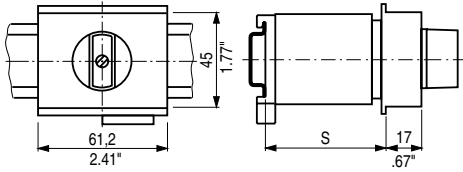


VE21
for CG4-CGD4-1

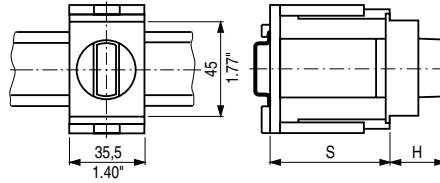


VE3

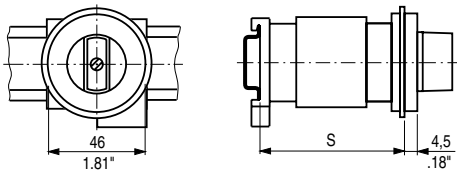

VE21
for CG8-CHR16

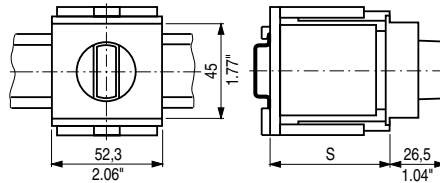


VE4

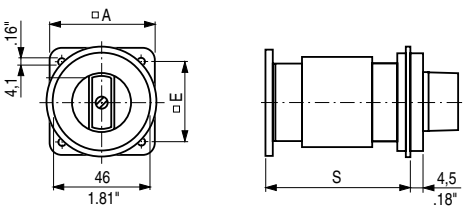

	VE2		VE3		VE4	
	CG8 Max. no. of stages	CH10- CHR16 Max. no. of stages	CG8 Max. no. of stages	CH10- CHR16 Max. no. of stages	CG8 Max. no. of stages	CH10- CHR16 Max. no. of stages
S = 46 1.81	1	1	-	-	1	-
S = 50 1.97	2	2	1	1	1	-
S = 61 2.40	3	2	2	1	2	1
S = 67 2.64	3	3	2	2	2	2
S = 69 2.70	3	3	2	2	2	2
A					48 1.89	64 2.52
E					36 1.42	48 1.89

VE21		CG4- CGD4-1	CG8	CH10- CHR16
S_{min.}	H			
44 1.73	21 .83	1	1	1
46 1.81	26.5 1.04	2	2	-
50 1.97	-	-	-	2
54 2.13	-	-	-	-
60 2.36	-	-	3	-
62 2.44	26.5 1.04	3	-	-
64 2.52	-	-	-	3
72 2.83	-	-	4	-

Escutcheon plates for mounting E, EF, EG, EGF, KN1, KD1, KN2, EC, EC1, ED, ED1, VE, VE1, VF

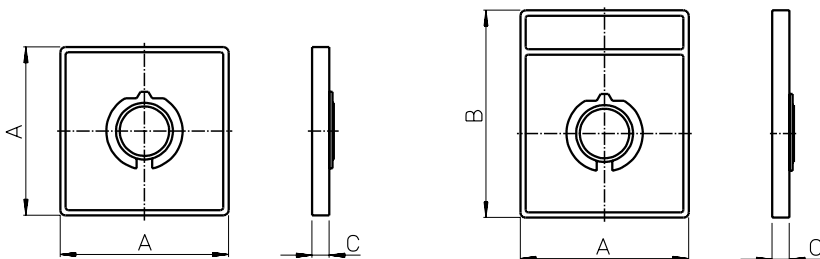

Size	A	B	C
S00	30 1.18	39 1.54	5.5 .22
S0	48 1.89	59 2.32	6.7 .26
S1	64 2.52	78 3.07	7.4 .29


< back to table of contents >

Additional Lengths


Additional lengths for amendment (page 6)

	CG8	CH10 CH16	CHR10 CHR16
B	6,2 .24	6,2 .24	6,2 .24
S	17,3 .68	17,3 .68	17,3 .68
L, M	24,8 .98	24,8 .98	24,8 .98
X	23,3 .92	23,3 .92	23,3 .92

Quick connect terminations (plug 2,8 mm or 6,35 mm) for CH switches (page 6)



with quick connects



with angled quick connects

Length L

Stages	CG4		CG6	CG8	CH6 CHR6	CH10	CHR10	CH10B CHR10B	CHR16B CHR16B
	CG4-1					CH11	CHR11		
	CGD4-1					CH12 CH16	CHR12 CHR16		
1	38,5 1.52	43,2 1.70	40,7 1.60	46 1.81	43,5 1.71	43,5 1.71	48,9 1.93	48,9 1.93	
2	50,5 1.99	55,9 2.20	53,4 2.10	60 2.36	57,5 2.26	57,5 2.26	62,9 2.48	62,9 2.48	
3	62,5 2.46	68,6 2.70	66,1 2.60	74 2.91	71,5 2.81	71,5 2.81	76,9 3.03	76,9 3.03	
4	74,5 2.93	81,3 3.20	78,8 3.10	88 3.46	85,5 3.37	85,5 3.37	90,9 3.58	90,9 3.58	
5	86,5 3.41	-	91,5 3.60	-	99,5 3.92	99,5 3.92	104,9 4.13	104,9 4.13	
6	98,5 3.88	-	104,2 4.10	-	113,5 4.47	113,5 4.47	118,9 4.68	118,9 4.68	
7	110,5 4.35	-	116,9 4.60	-	127,5 5.02	127,5 5.02	132,9 5.23	132,9 5.23	
8	122,5 4.82	-	129,6 5.10	-	141,5 5.57	141,5 5.57	146,9 5.78	146,9 5.78	
9	-	-	142,3 5.60	-	155,5 6.12	155,5 6.12	160,9 6.34	160,9 6.34	
10	-	-	155 6.10	-	169,5 6.67	169,5 6.67	174,9 6.89	174,9 6.89	
11	-	-	167,7 6.60	-	183,5 7.22	183,5 7.22	188,9 7.44	188,9 7.44	
12	-	-	180,4 7.10	-	197,5 7.77	197,5 7.77	202,9 7.99	202,9 7.99	

The Range of “Blue Line” Switchgear

Technical literature covering the following products is available on request.

	Catalog Number
Main Switches and Main Switches with Emergency Function 16 A-315 A Maintenance Switches 20 A-315 A Switch Disconnectors 20 A-315 A According to IEC 60947-3, EN 60947-3, VDE 0660 part 107, IEC 60204, EN 60204 and VDE 0113	500
CL Switches 10 A-20 A C, CA and CAD Switches 10 A-315 A and L Switches 350 A-2400 A C, CA and CAD switches are designed for universal application. They are recommended for instrument, isolator, double-throw and motor control. L switches are designed for load and off-load applications. They are used to switch resistive or low inductive loads.	100
Optional Extras and Enclosures The complete product line, a large number of optional extras is available, including door interlocks, push-pull devices, cylinder and padlock attachments, control and indicator devices, AC motor drives, as well as enclosures, both insulated and metal.	101
A and AD Switches 6 A-25 A A and AD switches have 4 contacts in each switching stage. These switches provide an extensive range of switch functions and require a minimum mounting depth. Up to 24 switching positions are possible, with availability of 48 contacts per 12 stage switch column.	110
CG, CH and CHR Switches 10 A-25 A Ultra compact CG, CH and CHR switches are ideally suited for control and instrumentation applications. Switch terminals are “finger-proof” and conveniently accessible for wiring and are delivered open. All CG4 switches offer specially designed gold plated contacts or H-bridges with “cross-wire” contact systems, which facilitates their use in electronic circuitry and chemically aggressive environments.	120
DH, DHR, DK and DKR Switches 6 A-16 A DH, DHR, DK and DKR switches incorporate unique corrosion resistant contacts that permit operation on system voltage as low as 1 V. They have fully enclosed and protected contacts which can be operated either by rotary and/or lateral handle movement. D switches are used in calibration and semiconductor circuits. They are also used for relay and contactor control.	130
X Switches 200 A-630 A X switches can be applied for load, tap and gang switching duties. They incorporate 6 contacts in each switching stage. Their compact design provides a minimum length dimension for mounting purposes.	140
KG Switches 20 A-315 A and KH and KHR Switches 16 A-80 A KG, KH and KHR switches are excellent circuit interruptors. They have high through fault and fault making capacities and are especially designed for use as isolators and safety switches for machine tools, distribution panels and switchboards. KG ON/OFF switches offer unusually high dimensioned air and creepage distances between terminals which are designed for time saving “straight-line” wiring. ON/OFF switches are available with up to 8 poles and double-throw switches are available with up to 4 poles.	150
Push Buttons and Pilot Lights, 22,5 mm Ø A complete range of state-of-the-art push buttons and pilot lights represent an ideal combination of functional security and economical efficiency in a modular design.	302

SALES AND SERVICE ORGANIZATION

Australia

Kraus & Naimer Pty. Ltd.
379 Liverpool Road, ASHFIELD, N.S.W. 2131
Tel: +61 2 9797-7333, Fax: 0092
salesaus@krausnaimer.com

Austria

Kraus & Naimer GmbH
Schumanngasse 35
1180 WIEN
Tel: +43 1 404 06-0, Fax: 404 06-190
aso@krausnaimer.com

Belgium, Luxembourg

Kraus & Naimer B.V.
Ikaros Business Park
Ikaroslaan 2
B-1930 ZAVENTHEM
Tel: +32 2 757-0141, Fax: 1640
sales.be@krausnaimer.com

Brazil

Central and South America
Kraus & Naimer Ind. Com. Ltda.
Rua Santa Monica, 1061
Parque Industrial San Jose
06715-865 Cotia - SP
Tel: +55 11 2198-1288, Fax: 1251
knbrasil@krausnaimer.com.br

Canada

Kraus & Naimer Ltd.
219 Connie Crescent, Unit: 13A
CONCORD, Ontario, L4K 1L4
Tel: +1 905 738-1666, Fax: 9327
salescan@krausnaimer.com

Cyprus

ELECTROMATIC CONSTRUCTIONS LTD.
72, Evagoras Pellikarides Str., CY-2235 LATSIA-Nicosia
P. O. Box 12630, CY-2251 LATSIA-Nicosia
Tel: +357 2 48 41 41, Fax: 48 57 47

Czech Republic

OBZOR, výrobní družstvo Zlín
Na Slanici 378
CZ-76413 ZLÍN
Tel: +420 57 7195-111/-153 (Techn. Supp.)
Fax: +420 57 7195-152/-138
ots@obzor.cz

Denmark

THIIM A/S
Transformervej 31
DK-2730 HERLEV
Tel: +45 4485 8000, Fax: 8005
thiim@thiim.com

Finland

Kraus & Naimer Oy
Kiitoradankuja 8
FIN-01530 VANTAA
Tel: +358 9 825-424-0, Fax: 424-10
myynti@krausnaimer.com

France

Kraus & Naimer s.a.s.
33, rue Bobillot
F-75013 PARIS
Tel: +33 1 58 40 80 80, Fax: 45 80 91 19
ventes@krausnaimer.com

Germany

Kraus & Naimer GmbH
Wikingerstraße 20-28, D-76189 KARLSRUHE
Postfach 10 01 24, D-76231 KARLSRUHE
Tel: +49 721 59 88-0, Fax: 59 28 28
sales.ger@krausnaimer.com

Great Britain

Kraus & Naimer Ltd.
115 London Road
NEWBURY/BERKSHIRE RG14 2AH
Tel: +44 1635 262626, Fax: 37807
sales-uk@krausnaimer.com

Greece

KALAMARAKIS-SAPOUNAS S. A.
Ionias & Neromilou Str., P. O. Box 46566
GR-13671 ACHARNES/ATHENS
Tel: +30 2 10 240-6000-6, Fax: 240-6007
kalamarakis.sapounas@ksa.gr

Hungary

GANZ, Schalter- u. Gerätefabrik
X. Kőbányal út 41/c, Postfach 87
H-1475 BUDAPEST
Tel: +36 1 261-5479, Fax: 4685
ganzkk@ganzkk.hu

Iceland

BRAEDURNIR ORMSSON EHF
Lágmúli 6-8, P. O. Box 8670
REYKJAVIK
Tel: +354 530-28 00, Fax: 28 10
skuli@ormsson.is

India

BLISS ELECTRICALS Pvt. Ltd.
SA42 A&B, 2nd Flr, Lake City Mall,
Kapurbavdi Junction,
THANE (W) - 400 607
Tel: +91-22-25368609
kane.shriram@blisselectricals.com

Republic of Ireland

Kraus & Naimer Ltd.
4235 Atlantic Avenue
Westpark Business Campus
Shannon, Co. Clare
Tel: +353 61 704700, Fax: 471084
sales-ie@krausnaimer.com

Italy

Kraus & Naimer s.r.l.
Via Terracini, 9
I-24047 TREVIGLIO (BG)
Tel: +39 0363-30 11 12, Fax: 30 21 13
SalesItaly@krausnaimer.com

Japan

Kraus & Naimer Ltd.
Yoshiwada Building 2F
1-11-6 Hamamatsucho
Minato-Ku, TOKYO 105-0013
Tel: +81 3 3436-6151, Fax: 6325
sales-jpn@krausnaimer.com

Mexico

JC Ingeniería y Control, SA de CV.
Ángel Gaviño 30.
C. Satélite, C. Medicos,
Naucalpan Edo. de Mexico, C.P. 53100
Tel. (+52 55) 55 62 75 77, Fax. 55 62 04 34
ventas@jcingenieraycontrol.com

Middle East - UAE

Branch Office, Kraus & Naimer Pte. Ltd.
SAIF Zone, P. O. Box 121607,
Sharjah, UAE
Tel: +971 6 557 8886
Fax: +971 6 557 8088
uae@krausnaimer.com

Netherlands

Kraus & Naimer B.V.
Wegtersweg 38-40, Postbus 199
NL-7556 BR HENGEL0 (Ov.)
Tel: +31 74 291-9441, Fax: 8380
sales.nl@krausnaimer.com

New Zealand

Kraus & Naimer Ltd.
42 Miramar Avenue, WELLINGTON 6022
P. O. Box 15-009, WELLINGTON 6243
Tel: +64 4 380-9888, Fax: 9877
sales-nz@krausnaimer.com

Norway

Kraus & Naimer AS
Hjalmar Brantings vei 8, P. O. Box 21, Økern
N-0508 OSLO
Tel: +47 22 64 44 20, Fax: 65 39 49
ordre.no@krausnaimer.com

Poland

ASTAT sp. z o.o.
ul. Dąbrowskiego 461
PL-60451 POZNAN
Tel: +48 61 848-8871/72, Fax: 8276
info@astat.com.pl

Portugal

ELECTRICOL-DAMAS, FERREIRA & DAMASCENO, LDA.
Apartado 1063, S. Ant. Cavaleiros
P-2670 LOURES
Tel: +351 21 989-8939, Fax: 988-6464
electrical@electricol.pt

Singapore

Kraus & Naimer Pte. Ltd.
Blk 115A, Commonwealth Drive
#03-17/23
SINGAPORE 149 596
Tel: +65 6473-8166, Fax: 8643
sgp@krausnaimer.com

Slovenia

SCHRACK Technik d.o.o.
Pameče 175
SI-2380 Slovenj Gradec
Tel: +386 2 883 92 00, Fax: +386 2 884 34 71
m.abeln@schrack.si

Republic of South Africa

Kraus & Naimer Pty. Ltd.
7 Village Crescent, Linbro Village
Linbro Business Park, SANDTON 2065
P. O. Box 511, KELVIN 2054
Tel: +27 11 608-6060, Fax: 608-2874
salesZAF@krausnaimer.com

Spain

Kraus & Naimer B.V.
Tel: +34 662 696 014
sales.es@krausnaimer.com

Sweden

Kraus & Naimer AB
Dr. Widerströms Gata 11, FRUÅNGEN
Box 42097, S-126 14 STOCKHOLM
Tel: +46 8 97 00 80, Fax: 97 87 33
order.se@krausnaimer.com

Switzerland

AWAG Elektrotechnik AG
Sandbühlstraße 2, Postfach
CH-8604 VOLKETSCHWIL
Tel: +41 44 908 19 19, Fax: 19 99
info@awag.ch, www.awag.ch

Turkey

KARDEŞ ELEKTRİK SANAYİ VE TİCARET ANONİM ŞİRKETİ
Beşyol, Eski Londra Asfaltı-6
TR-34295 İSTANBUL-Sefaköy
Tel: +90 212 624-9204, Fax: 592-4810
info@unalkardes.com.tr

USA

Kraus & Naimer Inc.
760 New Brunswick Road
SOMERSET, NJ 08873
Tel: +1 732 560-1240, Fax: 8823
salesusa@krausnaimer.com



Kraus & Naimer

BLUE LINE switchgear



Contact us:

www.krausnaimer.com