
# **Monitoring Technique**

# VARIMETER Standstill Monitor BD 5936



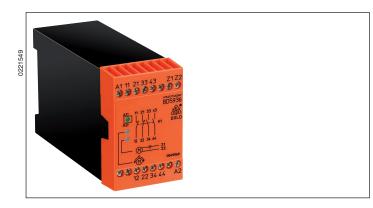


# **Product Description**

The BD 5936 detecting standstills of 3- and 1-phase asynchronous motors. At 2 terminals of the stator winding the BD 5936 measures the voltage of the slowing motor which has been induced.. If the induction voltage approaches 0 this indicates that the device is at a standstill and the output relay is activated.

Additional the monitor detects strand breaks between measurement inputs Z1 / Z2.. If a line breakage is detected, the output relay goes into the normal position (as when the motor is running). This state ist saved and can only be cleared by (briefly) switching off the auxiliary voltage.

# **Function Diagram**

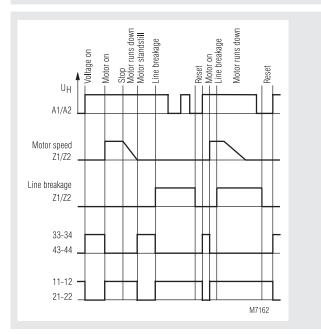

# Your Advantage

Standstill monitoring without sensor

#### Features

- According to IEC/EN 60255-1, IEC/EN 60255-26
- For standstill monitoring of 3- and 1-phase asynchronous motors
- Line breakage detection in the measurement circuit
- Forcibly guided output contacts: 2 NO, 2 NC contacts for 250 V AC
- LED indicators for motor standstill, line breakage, and operating voltage
- Wire connection: also 2 x 1.5  $\rm mm^2$  stranded ferruled (isolated), DIN 46 228/-1/-2/-3/-4 or
- $2\ x\ 2.5\ mm^2\ stranded\ ferruled\ DIN\ 46\ 228-1/-2/-3$
- Width 45 mm

# Approvals and Marking



\* see variants

#### Applications

For detecting standstills of 3- and 1-phase asynchronous motors, for example, for releasing protective door interlocks of machine tools or for activationg stopping brakes.


## Notes

In the case on the motor wires the Z1 / Z2 connection wire should be installed separately from the motor supply and connected directly to the motor terminals. For longer distances please use twisted pair wires.

## Indicators

1st green LED: 2nd green LED: Red LED: comes on when operating voltage present comes on when motor at a standstill comes on in event of line breakage between Z1 and Z2

#### **Circuit Diagram**



# **Connection Terminals**

1

Terminal designation	Signal designation
A1, A2	Auxiliary voltage U <sub>H</sub>
Z1, Z2	Measuring input (connection on motor)
11, 12, 21, 22	Forcibly guided NC contacts
33, 34, 43, 44	Forcibly guided NO contacts

## **Technical Data**

#### Input

Auxiliary voltage U<sub>µ</sub>:

 Voltage range:
 0.8 ... 1.1

 Nominal consumption:
 approx. 3

 Nominal frequency:
 50 / 60 H:

 Measurement/motor voltage:
 AC 690 V

 Response value:
 approx. 2/

 Release value:
 approx. 4/

# Output

Contacts BD 5936.17: Contact type: Output rated voltage: Thermal current I<sub>th</sub>: Switching capacity to AC 15: NO contact: NC contact: Electrical life to AC 15 at 2 A, AC 230 V: Short circuit strength max. fuse rating: Mechanical life:

**General Data** 

 Operating mode:
 Continuous operation

 Temperature range:
 - 15 ... + 55 °C

 otherway:
 00 % circle human

at max. 90 % air humidity Clearance and creepage distances rated impulse voltage / pollution degree, Terminals Z1/Z2: IEC 60 664-1 at AC-Auxiliary voltage  $U_{H}$ : 6 kV / 2 (Overvoltage category III) at AC/DC-Auxiliary voltage U.: 4 kV / 2 (Overvoltage category II) **FMC** Electrostatic discharge: 8 kV (air) IEC/EN 61 000-4-2 HF irradiation: 10 V/m IEC/EN 61 000-4-3 2 kV IEC/EN 61 000-4-4 Fast transients: Surge voltages between 2 kV IEC/EN 61 000-4-5 wires for power supply: 4 kV IEC/EN 61 000-4-5 between wire and ground: IEC/EN 61 000-4-6 HF-wire guided 10 V Interference suppression: Limit value class B EN 55 011 Degree of protection: IP 40 Housing: IEC/EN 60 529 Terminals: IP 20 IEC/EN 60 529 Thermoplastic with V0 behaviour Housing: to UL Subj. 94 Vibration resistance: Amplitude 0.35 mm frequency 10 ... 55 Hz IEC/EN 60 068-2-6 Climate resistance: 15 / 055 / 04 IEC/EN 60 068-1 Terminal designation: EN 50 005 Wire connection: 1 x 4 mm<sup>2</sup> solid or 1 x 2.5 mm<sup>2</sup> stranded ferruled (isolated) or 2 x 1.5 mm<sup>2</sup> stranded ferruled (isolated) DIN 46 228-1/-2/-3/-4 or 2 x 2.5 mm<sup>2</sup> stranded ferruled DIN 46 228-1/-2/-3 Line attachment: Plus-minus terminal screws M 3.5 box terminal with wire protection Mounting: DIN rail IEC/EN 60 715 Weigth: 325 g Dimensions

AC 24, 48, 110, 120, 230 V, AC/DC 24 ... 60 V, 110 ... 230 V (other voltages on request) 0.8 ... 1.1 U<sub>N</sub> approx. 3 VA,3 W 50 / 60 Hz AC 690 V approx. 20 mV approx. 40 mV

2 NO, 2 NC contacts

relay, forcibly guided

250 V AC

3 A / AC 230 V

2 A / AC 230 V

10<sup>5</sup> switching cycles

10 x 10<sup>6</sup> switching cycles

5 A

6 A gL

UL-Data

Switching capacity: NO contacts:

NC contacts:

10A 24Vdc 10A 250Vac G.P.

Pilot duty A300 10A 250Vac G.P.

10A 250Vac G.H 10A 24Vdc



Technical data that is not stated in the UL-Data, can be found in the technical data section.

# CCC-Data

Thermal current I<sub>th</sub>: Switching capacity to AC 15: to DC 13: 5 A

2 A / AC 230 V

1 A / DC 24 V

IEC/EN 60 947-5-1 IEC/EN 60 947-5-1

Info

IEC/EN 60 947-5-1

IEC/EN 60 947-5-1

IEC/EN 60 947-5-1

Technical data that is not stated in the CCC-Data, can be found in the technical data section.

without automatic reset for broken wire

with UL-approval (Canada/USA)

with CCC-approval on request


# Standard Type

BD 5936.17/001 AC 230 V 50/60 Hz Article number: 0049069 • Output: 2 NO, 2 NC contacts • Auxiliary voltage U<sub>H</sub>: AC 230 V • With automatic reset for broken wire detection • Width: 45 mm

# Variants


BD 5936.17: BD 5936.17/61: BD 5936:

# Ordering example for variants



detection

# **Connection Example**



E. DOLD & SÖHNE KG • D-78114 Furtwangen • PO Box 1251 • Telephone (+49) 77 23 / 654-0 • Telefax (+49) 77 23 / 654-356

45 x 74 x 121 mm

Width x height x depth: