


IS 204 Inductive switches

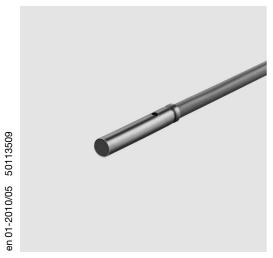




- Slim and short cylindrical metal housing Ø 4mm
- Stainless steel housing
- Built-in short circuit protection, inductive protection and polarity reversal protection
- LED for switching state

Dimensioned drawing



- A Active surface
- B Yellow indicator diode

Electrical connection





(available separately)

IS 204

Specifications

General specifications Type of installation Typ. operating range limit S_n

Operating range Sa

Electrical data

Operating voltage U_B 1) Residual ripple σ Output current IL Open-circuit current I₀ Residual current I,

Switching output/function

Voltage drop U_d Hysteresis H of S Temperature drift of Sr Repeatability

Timing

Switching frequency f Delay before start-up

Indicators

Yellow LED

Mechanical data Housing

Standard surface plate Active surface Weight (M8 plug/cable) Connection type

Environmental data

Ambient temperature Protection class Protective circuit 4) Standards applied

Electromagnetic compatibility

IS 204...-1E5

embedded installation 1.5mm

0 ... 1.2mm

 $\begin{array}{l} 10 \ ... \ 30 VDC \\ \leq 20 \ \% \ of \ U_B \end{array}$ ≤ 200 mA ≤ 10mA < 100 µA

PNP transistor, make-contact (NO) PNP transistor, break-contact (NC) .../4NO... .../4NC... .../2NO... NPN transistor, make-contact (NO) .../2NC... NPN transistor, break-contact (NC)

 $\leq 2V$ ≤ 10 % ≤ 10 % 2) ≤ 2 % 3)

3kHz ≤ 10ms

switching state

stainless steel 4.5 x 4.5 mm², Fe360

PA66

approx. 32g cable: 2m, PVC, 3 x 0.14mm², Ø 3.5mm

-25°C ... +70°C

IP 67 1, 2, 3 IEC/EN 60947-5-2

IEC 60255-5 IEC 61000-4-2

Level 2 air 4kV (ESD) Level 3 10V/m (RFI) IEC 61000-4-3 IEC 61000-4-4 Level 3 2kV (Burst)

- 1) Observe the safety regulations and installation instructions regarding power supply and wiring.
- Over the entire operating temperature range For $U_B = 20 \dots 30 \text{VDC}$, ambient temperature $T_a = 23 \text{ °C} \pm 5 \text{ °C}$
- 1=polarity reversal protection, 2=short circuit protection, 3=inductive protection for all outputs

Order guide

The sensors listed here are preferred types; current information at www.leuze.com.

Designation Part No.

IS 204 MP/4NO-1E5 50113478 $S_{n} = 1.5 \, \text{mm}$


Tables


Reduction factors:

for $S_n = 1.5 \text{mm}$ Steel Fe360 0.40 Copper Aluminum 0.40 0.50 Brass Stainless steel 0.75

Mounting

Embedded installation:






<u>Ferromagnetic and</u> <u>non-ferromagnetic materials</u>			
S _n [mm]	D1 [mm]	D2 [mm]	D3 [mm]
1.5	0	1.0	1.5


Diagrams

Models with $s_n = 1.5$ mm



IS 204...E... - 01 2010/05 IS 204 Inductive switches

Type key

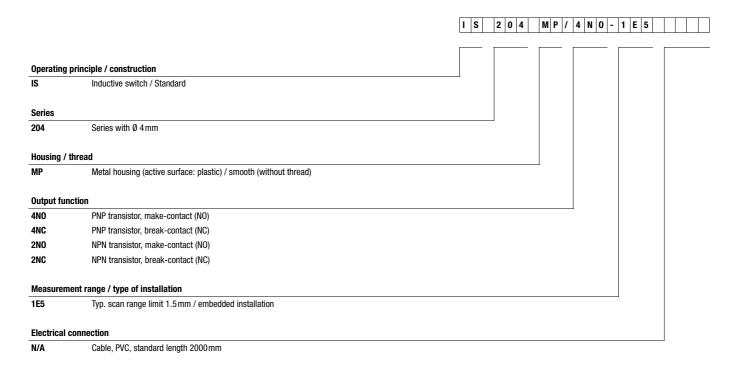

Remarks

• Approved purpose:

The inductive switches are electronic sensors for the inductive, contactless detection of objects. This product may only be used by qualified personnel and must only be used for the approved purpose. This sensor is not a safety sensor and is not to be used for the protection of persons.

IS 204

IS 204...E... - 01 2010/05