MEF EMC-FILTER 3-PHASE 2-STAGE

I:16A U:3x500 VAC book-style

Current: 16 A
2-stage

Attenuation curves on request.

Link to Product

Illustration

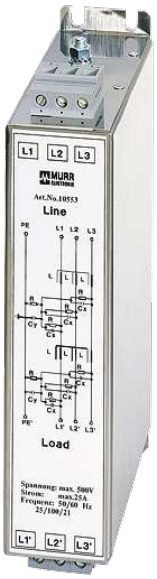

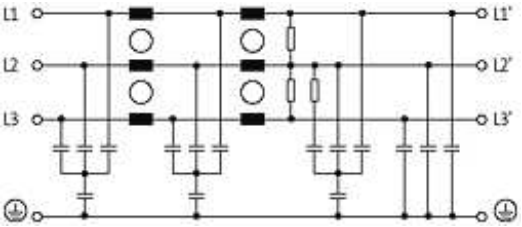

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

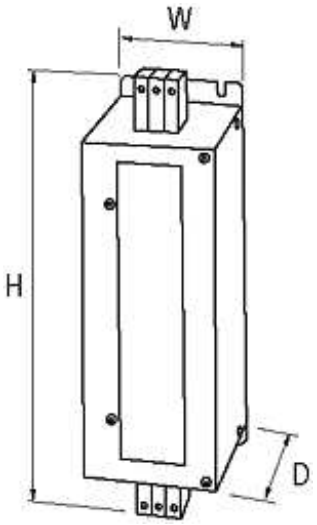

Product may differ from Image

Approvals

General data

Climatic category	25/085/21 (EN 60068-1)
Test isolation voltage	3.3 kV (L - N), 2 s; 3.1 kV (L -L), 2 s
Connection	Screw connection, touch protected
Mounting method	screw fixing
Dimensions H × W × D	226×50×140 mm

Technical Data

Connection cross section	0.2...10 mm² single core (AWG 24...7); 0.2...6 mm² multiple core (AWG 24...9)

Description

Functional description	The 3-phase and 1-/2-stage EMC filters MEF 3/1-3/2 are used in the range 0.1...30 MHz and dampen interferences found in cables from the mains, supply units and control systems. They are suitable for TN-C- and IT mains. The best results are obtained with s

Commercial data

country of origin	IT
customs tariff number	85363010
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16