
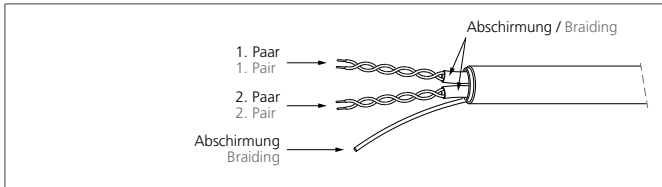


MC 50
MS - Connecting cable RS485

- Flexible lead design
- Good stripping properties
- Shielded

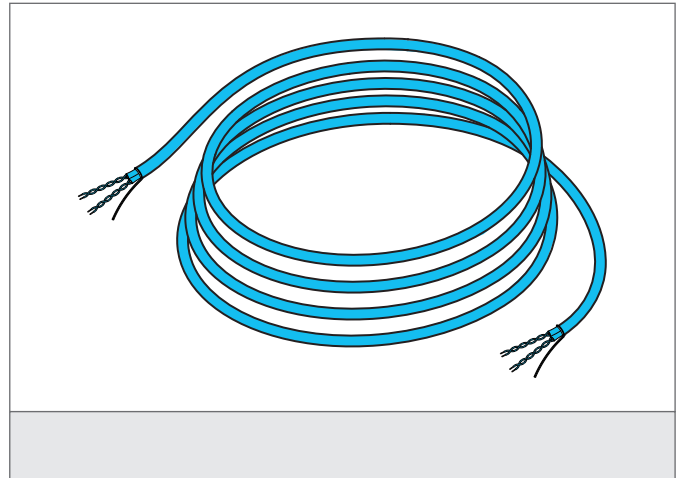

Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to.
 The set-up of the products have to be made by skilled staff, only.
 Repair exclusively made by di-soric.

TECHNICAL INFORMATION (typ.)		+20°C, 24V DC
Operating principle		Connecting cable RS485
Design		open ends
Length		50.000 mm
Characteristics		shielded
For		Connection of MS-CTx interface modules
Model		Serial RS485 cable
Connection		flying leads, 5-poled