

VISION SENSOR CS 50

Blickfeld und Anschluss

VISION SENSOR CS 50


Field of view and Connection



Blickfeld - Vision Sensor CS 50


Field of view - Vision Sensor CS 50

Blickfeld, Brennweite 5/10 mm
Field of view, Focal length 5/10 mm

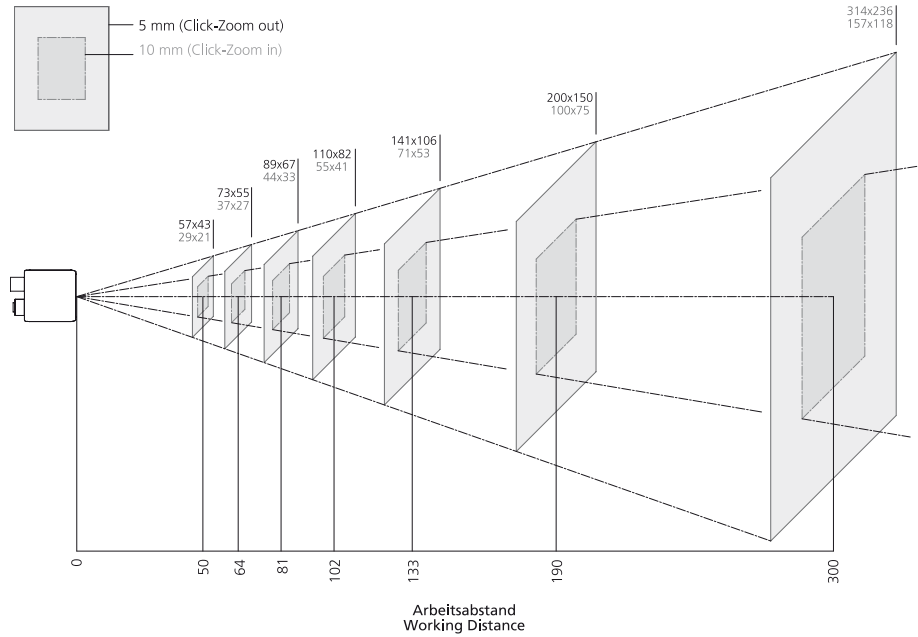

alle Angaben in mm
 all values in mm

Blickfeld, Brennweite 16/32 mm
Field of view, Focal length 16/32 mm

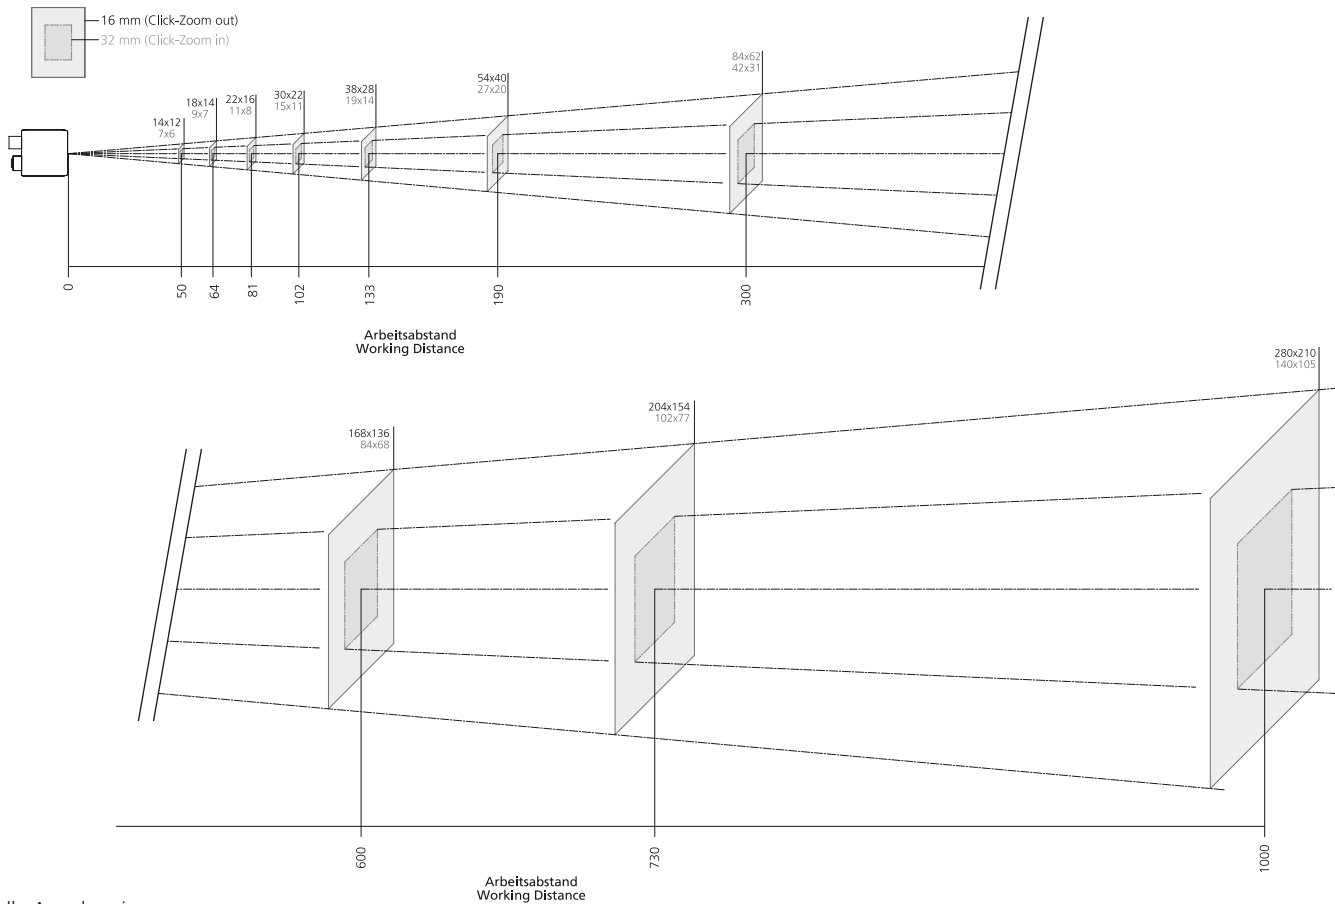

alle Angaben in mm
 all values in mm


Anschluss - Vision Sensor CS 50

Connection - Vision Sensor CS 50

Stecker M12, 12-polig Plug M12, 12-poled			Buchse M12, 8-polig Socket M12, 8-poled	
PIN / Pin	Port A: Power I/O	Aderfarbe / Wire colour	Port B: Ethernet	
1	Trigger	Braun / brown	V (+)	
2	Power	Blau / blue	V (-)	
3	Nicht verwendet / Not used	Weiß / white	V (-)	
4	Nicht verwendet / Not used	Grün / green	TX (-)	
5	Ausgang 1 / Output 1	Pink / pink	RX (+)	
6	Ausgang 3 / Output 3	Gelb / yellow	TX (+)	
7	0VDC / Ground	Schwarz / black	V (+)	
8	Gemeinsamer Eingang / Input common	Grau / grey	RX (-)	
9	Host RxD	Rot / red	-	
10	Host TxD	Violett / violet	-	
11	Ausgang 2 / Output 2	Grau/Pink / grey/pink	-	
12	Gemeinsamer Ausgang / Output common	Rot/Blau / red/blue	-	

Spannungs-, Trigger- und Ausgangsverkabelung

Voltage, trigger and output cabling

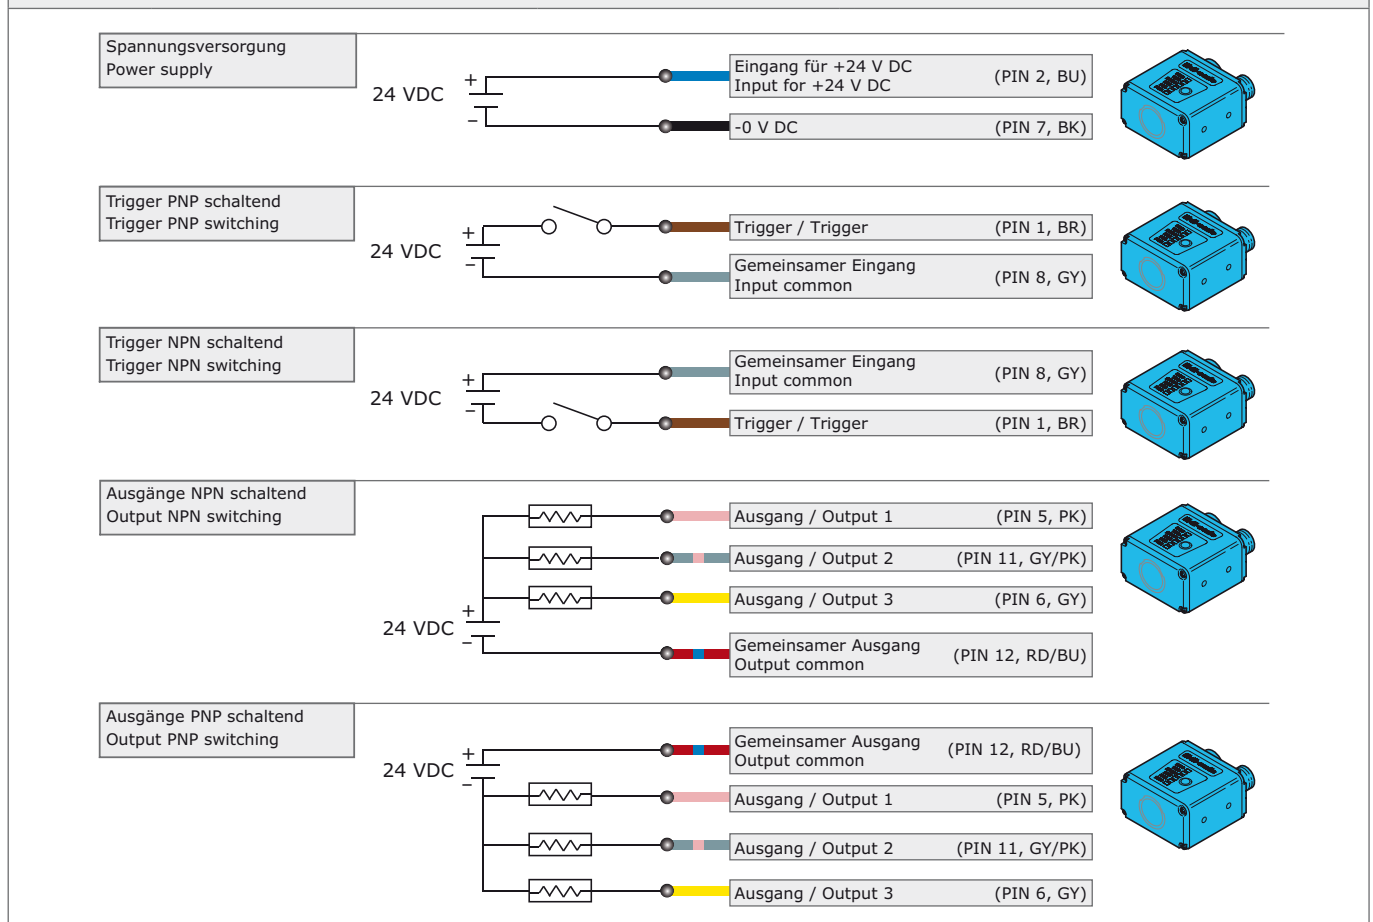

KONTAKTIEREN SIE UNS
CONTACT US

di-soric GmbH & Co. KG
Steinbeisstraße 6
73660 Urbach
Germany

Fon: +49 (0) 71 81 / 98 79 - 0
Fax: +49 (0) 71 81 / 98 79 - 179
info@di-soric.com
www.di-soric.com

INTERNATIONAL

AUSTRIA

di-soric Austria GmbH & Co. KG
Burg 39
4531 Kematen an der Krems
Austria

Fon: +43 (0) 72 28 / 72 366
Fax: +43 (0) 72 28 / 72 366 - 4
info.at@di-soric.com

FRANCE

di-soric SAS
19, Chemin du Vieux Chêne
38240 Meylan
France

Fon: +33 (0) 4 76 / 61 65 90
Fax: +33 (0) 4 76 / 61 65 98
info.fr@di-soric.com

SINGAPORE

di-soric Pte. Ltd.
33 Ubi Avenue 3, #03-47 Vertex
Singapore 408868
Singapore

Fon: +65 / 66 34 38 43
Fax: +65 / 66 34 38 44
info.sg@di-soric.com

