


CONFIGURATION GUIDE

ID-200

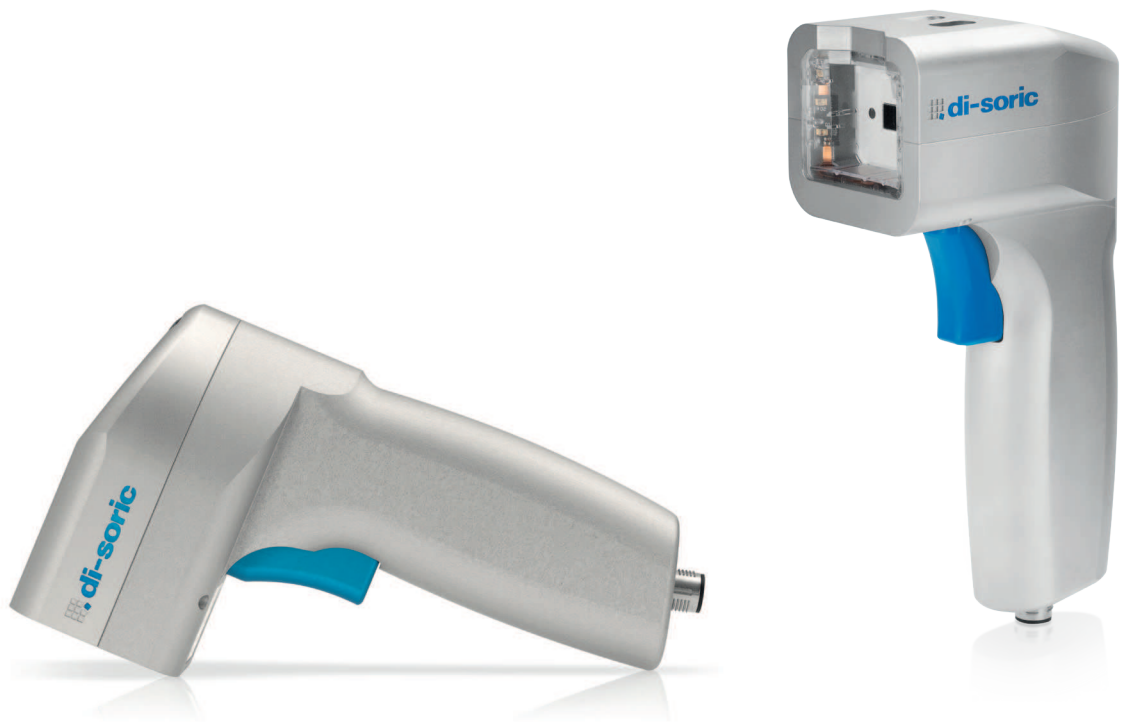

Made in Germany




Table of content

Direct Part Mark (DPM) Reading Mode Settings	6
DPM Auto Mode - Default	6 (A2)
DPM Dark Field (Dot Peen 15-45 Degrees)	6 (A3)
DPM Dark Field (Dot Peen 15-45 Degrees/Laser-Etched 90 Degrees)	6 (A4)
DPM Dark Field (Laser-Etched 90 Degrees)	6 (B1)
DPM Diffuse Bright Field (Dot Peen 90 Degrees)	6 (B2)
DPM Diffuse Bright Field (Dot Peen/Laser-Etched 90 Degrees)	6 (B3)
DPM Diffuse Bright Field (Laser-Etched 90 Degrees)	6 (B4)
DPM Curved Surface Mode (Dot Peen/Laser-Etched 90 Degrees)	6 (C1)
DPM Direct Bright Field (Paper Label)	6 (C2)
DPM Motion Detection Dark Field - Default	6 (C3)
DPM Motion Detection Diffuse Bright Field	6 (C4)
DPM Motion Detection Direct Bright Field	6 (D1)
General Reading Mode Settings	6-7
Continuous Scan Both Imagers On	6 (D3)
Continuous Scan Off - Default	6 (D4)
Motion Detection On in Stand, Trigger Out of Stand - Default	6 (E1)
Motion Detetion On In and Out of Stand	6 (E2)
Optimize Motion Detection for Bright Environments - Default	6 (E3)
Optimize Motion Detection for Dark Environments	6 (E4)
No Motion Detection Delay - Default	7 (A1)
500ms Motion Detection Delay	7 (A2)
Motion Detection Off In and Out of Stand	7 (A3)
Mirroring On	7 (B2)
Mirroring Off - Default	7 (B3)
Targeting On - Default	7 (B4)
Targeting Off	7 (C1)
Data Formatting (Prefix/Suffix) Settings	7-8
Erase Prefix & Suffix Data - Default	7 (C3)
Erase Prefix Data - Default	7 (C4)
Erase Suffix Data - Default	7 (D1)
Prefix AIM ID On	7 (D2)
Prefix AIM ID Off - Default	7 (D3)
Prefix Carriage Return Line Feed (RS232 Mode Only)	7 (D4)
Prefix Comma	7 (E1)
Prefix Space	7 (E2)
Prefix Tab (USB Keyboard Mode Only)	7 (E3)
Prefix Tab (RS232 Mode Only)	7 (E4)
Suffix Carriage Return (RS232 Mode Only)	8 (A1)
Suffix Carriage Return Line Feed (RS232 Mode Only)	8 (A2)
Suffix Comma	8 (A3)
Suffix Enter (USB Keyboard Mode Only)	8 (A4)
Suffix Line Feed (RS232 Mode Only)	8 (B1)
Suffix Space	8 (B2)
Suffix Tab (USB Keyboard Mode Only)	8 (B3)
Suffix Tab (RS232 Mode Only)	8 (B4)
Translate all Characters to Uppercase On	8 (C1)
Translate all Characters to Uppercase Off - Default	8 (C2)
Symbologies	8-14
Australian Post On	8 (C4)
Australian Post Off - Default	8 (D1)
Aztec On - Default	8 (D2)
Aztec Off	8 (D3)
Aztec Inverse On	8 (D4)
Aztec Inverse & Normal On	8 (E1)
Codabar On - Default	8 (E2)
Codabar Off	8 (E3)

Table of content

Codablock F On	8 (E4)
Codablock F Off - Default	9 (A1)
Code 11 On	9 (A2)
Code 11 Off - Default	9 (A3)
Code 11 Checksum Stripped from Result On	9 (A4)
Code 128 On - Default	9 (B1)
Code 128 Off	9 (B2)
Code 32 (Italian Pharmacode) On	9 (B3)
Code 32 (Italian Pharmacode) Off - Default	9 (B4)
Code 39 On - Default	9 (C1)
Code 39 Off	9 (C2)
Code 39 Checksum On	9 (C3)
Code 39 Checksum Off - Default	9 (C4)
Code 39 Checksum and Stripped from Results On	9 (D1)
Code 39 Extended Full ASCII On	9 (D2)
Code 39 Extended Full ASCII Off - Default	9 (D3)
Code 93 On - Default	9 (D4)
Code 93 Off	9 (E1)
Composite On	9 (E2)
Composite Off - Default	9 (E3)
Data Matrix (Defaulted On and Cannot be Disabled)	
Data Matrix Rectangle (Defaulted On and Cannot be Disabled)	
Data Matrix Inverse On - Default	9 (E4)
Data Matrix Inverse Off	10 (A1)
All GS1 DataBar On - Default	10 (A2)
All GS1 DataBar Off	10 (A3)
GS1 DataBar Omnidirectional and GS1 DataBar Truncated On	10 (A4)
GS1 DataBar Omnidirectional and GS1 DataBar Truncated Off	10 (B1)
GS1 DataBar Expanded On	10 (B2)
GS1 DataBar Expanded Off	10 (B3)
GS1 DataBar Expanded Stacked On	10 (B4)
GS1 DataBar Expanded Stacked Off	10 (C1)
GS1 DataBar Limited On	10 (C2)
GS1 DataBar Limited Off	10 (C3)
GS1 DataBar Stacked and GS1 DataBar Omnidirectional On	10 (C4)
GS1 DataBar Stacked and GS1 DataBar Omnidirectional Off	10 (D1)
Han Xin On	10 (D2)
Han Xin Off - Default	10 (D3)
Hong Kong 2 of 5 On	10 (D4)
Hong Kong 2 of 5 Off - Default	10 (E1)
IATA 2 of 5 On (IATA 2 of 5 is a variant of Straight 2 of 5; to enable IATA 2 of 5 scan Straight 2 of 5 On)	
IATA 2 of 5 Off (IATA 2 of 5 is a variant of Straight 2 of 5; to disable IATA 2 of 5 scan Straight 2 of 5 Off)	
Int 2 of 5 On - Default	10 (E2)
Int 2 of 5 Off	10 (E3)
Int 2 of 5 Checksum On	10 (E4)
Int 2 of 5 Checksum Off	11 (A1)
Int 2 of 5 Checksum Stripped from Result On	11 (A2)
Japan Post On	11 (A3)
Japan Post Off - Default	11 (A4)
KIX Code On	11 (B1)
KIX Code Off - Default	11 (B2)
Korean Post On	11 (B3)
Korean Post Off - Default	11 (B4)
Maxicode On	11 (C1)
Maxicode Off - Default	11 (C2)
Matrix 2 of 5 On	11 (C3)
Matrix 2 of 5 Off - Default	11 (C4)
Micro PDF417 On	11 (D1)
Micro PDF417 Off - Default	11 (D2)
MSI Plessey On	11 (D3)

Table of content

MSI Plessey Off -Default	11 (D4)
NEC 2 of 5 On	11 (E1)
NEC 2 of 5 Off - Default	11 (E2)
PDF417 On - Default	11 (E3)
PDF417 Off	11 (E4)
Pharmacode On	12 (A1)
Pharmacode Off - Default	12 (A2)
Pharmacode Normal Barcode Decoding (Left to Right)	12 (A3)
Pharmacode Reverse Barcode Decoding (Right to Left)	12 (A4)
All QR Code On	12 (B1)
All QR Code Off	12 (B2)
Standard QR Code On - Default	12 (B3)
Standard QR Code Off	12 (B4)
Straight 2 of 5 On	12 (C1)
Straight 2 of 5 Off - Default	12 (C2)
Telepen On	12 (C3)
Telepen Off - Default	12 (C4)
Trioptic On	12 (D1)
Trioptic Off - Default	12 (D2)
UK Plessey On	12 (D3)
UK Plessey Off - Default	12 (D4)
UK Royal Mail On	12 (E1)
UK Royal Mail Off - Default	12 (E2)
UPC On - Default	12 (E3)
UPC Off	12 (E4)
UPC E Expansion On	13 (A1)
UPC E Expansion Off - Default	13 (A2)
UPC Supplemental On	13 (A3)
UPC Supplemental Off	13 (A4)
UPU ID-Tag On	13 (B1)
UPU ID-Tag Off - Default	13 (B2)
USPS Intelligent Mail/IMB/4-State CB On	13 (B3)
USPS Intelligent Mail/IMB/4-State CB Off - Default	13 (B4)
USPS Planet On	13 (C1)
USPS Planet Off - Default	13 (C2)
USPS Postnet On	13 (C3)
USPS Postnet Off - Default	13 (C4)
Keyboard Language Settings	13-14
US English Keyboard Mapping - No Leading 0	13 (D2)
US English Keyboard Mapping - with Leading 0 for Non Printable ASCII	13 (D3)
Keyboard Control Characters for Non Printable ASCII	13 (D4)
Belgium Keyboard	13 (E1)
French Keyboard	13 (E2)
German Keyboard	13 (E3)
Japanese Keyboard	13 (E4)
Spanish (Latin America) Keyboard	14 (A1)
Swiss Keyboard	14 (A2)
Universal Keyboard Mapping	14 (A3)
Operating System Settings	14
Alternative Operating System (Linux/Mac) On	14 (B2)
Alternative Operating System (Linux/Mac) Off - Default	14 (B3)
USB Settings	14
Reset to USB Factory Defaults	14 (C2)
USB Keyboard Mode	14 (C3)
USB Downloader Mode	14 (C4)
USB HID POS (Terminal ID 131)	14 (D1)
USB Native Two Way Mode	14 (D2)

Table of content

USB Virtual COM One Way Mode	14 (D3)
USB Virtual COM Multiple Ports	14 (D4)
USB Virtual COM Common Port	14 (E1)
RS232 Settings	14-15
Reset to RS232 Factory Defaults	14 (E3)
RS232 Interface - 1200 Baud Rate	14 (E4)
RS232 Interface - 2400 Baud Rate	15 (A1)
RS232 Interface - 4800 Baud Rate	15 (A2)
RS232 Interface - 9600 Baud Rate	15 (A3)
RS232 Interface - 19200 Baud Rate	15 (A4)
RS232 Interface - 38400 Baud Rate	15 (B1)
RS232 Interface - 57600 Baud Rate	15 (B2)
RS232 Interface - 115200 Baud Rate - Default	15 (B3)
RS232 Interface - 7 Data Bits	15 (B4)
RS232 Interface - 8 Data Bits - Default	15 (C1)
RS232 Interface - Stop Bits - 1 - Default	15 (C2)
RS232 Interface - Stop Bits - 2	15 (C3)
RS232 Interface - Even Parity	15 (C4)
RS232 Interface - Odd Parity	15 (D1)
RS232 Interface - No Parity - Default	15 (D2)
RS232 Interface - Flow Control Off - Default	15 (D3)
RS232 Interface - Flow Control - Hardware	15 (D4)
RS232 Packet Mode	15 (E1)
RS232 Raw Mode - Default	15 (E2)
Reader Feedback Settings	16
Beep On Vibrate On - Default	16 (A2)
Beep Off Vibrate Off	16 (A3)
Beep Off Vibrate On	16 (A4)
Beep On Vibrate Off	16 (B1)
Beep Volume 100% - Default	16 (B2)
Beep Volume 67%	16 (B3)
Beep Volume 33%	16 (B4)
Beep Volume 0%	16 (C1)
Scan Delay Settings	16
Duplicate Scan Disabled - Default	16 (C3)
1 Second Duplicate Scan Delay	16 (C4)
2 Second Duplicate Scan Delay	16 (D1)
3 Second Duplicate Scan Delay	16 (D2)
5 Second Duplicate Scan Delay	16 (D3)
10 Second Duplicate Scan Delay	16 (D4)
30 Second Duplicate Scan Delay	16 (E1)
1 Hour Duplicate Scan Delay	16 (E2)
1 Day Duplicate Scan Delay	16 (E3)
Reader Commands	17
Reader ID and Firmware Version	17 (A2)
Reader Text Commands On	17 (A3)
Reader Text Commands Off - Default	17 (A4)
Reset, Clear and Save Reader Settings	17
Clear All Stored Data and Images	17 (B2)
Clear All JavaScript Rules	17 (B3)
Reboot Reader	17 (B4)

ID-200-IM3-2-S

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>Direct Part Mark (DPM) Reading Mode Settings</p>	<p>DPM Auto Mode - Default</p>  <p>M10375_01</p> <p>A2</p>	<p>DPM Dark Field (Dot Peen 15-45 Degrees)</p>  <p>M10378_01</p> <p>A3</p>	<p>DPM Dark Field (Dot Peen 15-45 Degrees/ Laser-Etched 90 Degrees)</p>  <p>M10379_01</p> <p>A4</p>
<p>DPM Dark Field (Laser-Etched 90 Degrees)</p>  <p>M10377_01</p> <p>B1</p>	<p>DPM Diffuse Bright Field (Dot Peen 90 Degrees)</p>  <p>M10382_01</p> <p>B2</p>	<p>DPM Diffuse Bright Field (Dot Peen/Laser-Etched 90 Degrees)</p>  <p>M10376_01</p> <p>B3</p>	<p>DPM Diffuse Bright Field (Laser-Etched 90 Degrees)</p>  <p>M10381_01</p> <p>B4</p>
<p>DPM Curved Surface Mode (Dot Peen/Laser-Etched 90 Degrees)</p>  <p>M10383_01</p> <p>C1</p>	<p>DPM Direct Bright Field (Paper Label)</p>  <p>M10380_01</p> <p>C2</p>	<p>DPM Motion Detection Dark Field - Default</p>  <p>M10384_01</p> <p>C3</p>	<p>DPM Motion Detection Diffuse Bright Field</p>  <p>M10385_01</p> <p>C4</p>
<p>DPM Motion Detection Direct Bright Field</p>  <p>M10386_01</p> <p>D1</p>	<p>General Reading Mode Settings</p>	<p>Continuous Scan Both Imagers On</p>  <p>M10012_01</p> <p>D3</p>	<p>Continuous Scan Off - Default</p>  <p>M10011_01</p> <p>D4</p>
<p>Motion Detection On in Stand Trigger Out of Stand - Default</p>  <p>M10403_02</p> <p>E1</p>	<p>Motion Detection On In and Out of Stand</p>  <p>M10404_02</p> <p>E2</p>	<p>Optimize Motion Detection for Bright Environments - Default</p>  <p>M10014_03</p> <p>E3</p>	<p>Optimize Motion Detection for Dark Environments</p>  <p>M10015_03</p> <p>E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>No Motion Detection Delay - Default</p>  <p>M10016_03</p> <p style="text-align: right;">A1</p>	<p>500ms Motion Detection Delay</p>  <p>M10017_03</p> <p style="text-align: right;">A2</p>	<p>Motion Detection Off In and Out of Stand</p>  <p>M10013_02</p> <p style="text-align: right;">A3</p>	<p style="text-align: right;">A4</p>
<p style="text-align: right;">B1</p>	<p>Mirroring On</p>  <p>M10125_01</p> <p style="text-align: right;">B2</p>	<p>Mirroring Off - Default</p>  <p>M10124_02</p> <p style="text-align: right;">B3</p>	<p>Targeting On - Default</p>  <p>M10153_01</p> <p style="text-align: right;">B4</p>
<p>Targeting Off</p>  <p>M10154_01</p> <p style="text-align: right;">C1</p>	<p style="text-align: center;">Data Formatting (Prefix/Suffix Settings)</p>	<p>Erase Prefix & Suffix Data - Default</p>  <p>M10135_01</p> <p style="text-align: right;">C3</p>	<p>Erase Prefix Data - Default</p>  <p>M10126_01</p> <p style="text-align: right;">C4</p>
<p>Erase Suffix Data - Default</p>  <p>M10130_01</p> <p style="text-align: right;">D1</p>	<p>Prefix AIM ID On</p>  <p>M10199_01</p> <p style="text-align: right;">D2</p>	<p>Prefix AIM ID Off - Default</p>  <p>M10198_01</p> <p style="text-align: right;">D3</p>	<p>Prefix Carriage Return Line Feed (RS232 Mode Only)</p>  <p>M10405_01</p> <p style="text-align: right;">D4</p>
<p>Prefix Comma</p>  <p>M10127_01</p> <p style="text-align: right;">E1</p>	<p>Prefix Space</p>  <p>M10128_01</p> <p style="text-align: right;">E2</p>	<p>Prefix Tab Line Feed (RS232 Mode Only)</p>  <p>M10129_01</p> <p style="text-align: right;">E3</p>	<p>Prefix Tab (RS232 Mode Only)</p>  <p>M10319_01</p> <p style="text-align: right;">E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>Suffix Carriage Return (RS232 Mode Only)</p>  <p>M10320_01</p> <p>A1</p>	<p>Suffix Carriage Return Line Feed (RS232 Mode Only)</p>  <p>M10322_01</p> <p>A2</p>	<p>Suffix Comma</p>  <p>M10131_01</p> <p>A3</p>	<p>Suffix Enter (USB Keyboard Mode Only)</p>  <p>M10134_01</p> <p>A4</p>
<p>Suffix Line Feed (RS232 Mode Only)</p>  <p>M10321_01</p> <p>B1</p>	<p>Suffix Space</p>  <p>M10132_01</p> <p>B2</p>	<p>Suffix Tab (USB Keyboard Mode Only)</p>  <p>M10133_01</p> <p>B3</p>	<p>Suffix Tab (RS232 Mode Only)</p>  <p>M10323_01</p> <p>B4</p>
<p>Translate all Characters to Uppercase On</p>  <p>M10220_02</p> <p>C1</p>	<p>Translate all Characters to Uppercase Off - Default</p>  <p>M10426_01</p> <p>C2</p>	<p>Symbology Settings</p>	
<p>Australian Post Off - Default</p>  <p>M10289_02</p> <p>D1</p>	<p>Aztec On - Default</p>  <p>M10018_01</p> <p>D2</p>	<p>Aztec Off</p>  <p>M10019_01</p> <p>D3</p>	<p>Aztec Inverse On</p>  <p>M10020_01</p> <p>D4</p>
<p>Aztec Inverse & Normal On</p>  <p>M10021_01</p> <p>E1</p>	<p>Codabar On - Default</p>  <p>M10022_01</p> <p>E2</p>	<p>Codabar Off</p>  <p>M10023_01</p> <p>E3</p>	<p>Codablock F On</p>  <p>M10027_01</p> <p>E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>Codablock F Off - Default</p>  <p>M10026_01</p> <p style="text-align: right;">A1</p>	<p>Code 11 On</p>  <p>M10029_01</p> <p style="text-align: right;">A2</p>	<p>Code 11 Off - Default</p>  <p>M10028_01</p> <p style="text-align: right;">A3</p>	<p>Code 11 Checksum Stripped from Result On</p>  <p>M10031_01</p> <p style="text-align: right;">A4</p>
<p>Code 128 On - Default</p>  <p>M10044_01</p> <p style="text-align: right;">B1</p>	<p>Code 128 Off</p>  <p>M10045_01</p> <p style="text-align: right;">B2</p>	<p>Code 32 (Italian Pharmacode) On</p>  <p>M10239_02</p> <p style="text-align: right;">B3</p>	<p>Code 32 (Italian Pharmacode) Off - Default</p>  <p>M10238_02</p> <p style="text-align: right;">B4</p>
<p>Code 39 On - Default</p>  <p>M10033_02</p> <p style="text-align: right;">C1</p>	<p>Code 39 Off</p>  <p>M10034_02</p> <p style="text-align: right;">C2</p>	<p>Code 39 Checksum On</p>  <p>M10036_01</p> <p style="text-align: right;">C3</p>	<p>Code 39 Checksum Off - Default</p>  <p>M10035_01</p> <p style="text-align: right;">C4</p>
<p>Code 39 Checksum Stripped from Result On</p>  <p>M10037_01</p> <p style="text-align: right;">D1</p>	<p>Code 39 Extended Full ASCII On</p>  <p>M10039_01</p> <p style="text-align: right;">D2</p>	<p>Code 39 Extended Full ASCII Off - Default</p>  <p>M10038_01</p> <p style="text-align: right;">D3</p>	<p>Code 93 On - Default</p>  <p>M10042_01</p> <p style="text-align: right;">D4</p>
<p>Code 93 Off</p>  <p>M10043_01</p> <p style="text-align: right;">E1</p>	<p>Composite On</p>  <p>M10047_01</p> <p style="text-align: right;">E2</p>	<p>Composite Off - Default</p>  <p>M10046_01</p> <p style="text-align: right;">E3</p>	<p>Data Matrix Inverse On - Default</p>  <p>M10051_03</p> <p style="text-align: right;">E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>Data Matrix Inverse Off</p>  <p>M10050_03</p> <p style="text-align: right;">A1</p>	<p>All GS1 DataBar On - Default</p>  <p>M10054_01</p> <p style="text-align: right;">A2</p>	<p>All GS1 DataBar Off</p>  <p>M10055_01</p> <p style="text-align: right;">A3</p>	<p>GS1 DataBar Omnidirectional and GS1 DataBar Truncated On</p>  <p>M10057_03</p> <p style="text-align: right;">A4</p>
<p>GS1 DataBar Omnidirectional and GS1 DataBar Truncated Off</p>  <p>M10355_02</p> <p style="text-align: right;">B1</p>	<p>GS1 DataBar Expanded On</p>  <p>M10059_03</p> <p style="text-align: right;">B2</p>	<p>GS1 DataBar Expanded Off</p>  <p>M10417_02</p> <p style="text-align: right;">B3</p>	<p>GS1 DataBar Expanded Stacked On</p>  <p>M10357_02</p> <p style="text-align: right;">B4</p>
<p>GS1 DataBar Expanded Stacked Off</p>  <p>M10356_02</p> <p style="text-align: right;">C1</p>	<p>GS1 DataBar Limited On</p>  <p>M10056_03</p> <p style="text-align: right;">C2</p>	<p>GS1 DataBar Limited Off</p>  <p>M10354_02</p> <p style="text-align: right;">C3</p>	<p>GS1 DataBar Stacked and GS1 DataBar Stacked Omnidirectional On</p>  <p>M10058_03</p> <p style="text-align: right;">C4</p>
<p>GS1 DataBar Stacked and GS1 DataBar Stacked Omnidirectional Off</p>  <p>M10353_03</p> <p style="text-align: right;">D1</p>	<p>Han Xin On</p>  <p>M10248_01</p> <p style="text-align: right;">D2</p>	<p>Han Xin Off - Default</p>  <p>M10249_01</p> <p style="text-align: right;">D3</p>	<p>Hong Kong 2 of 5 On</p>  <p>M10079_01</p> <p style="text-align: right;">D4</p>
<p>Hong Kong 2 of 5 Off - Default</p>  <p>M10078_02</p> <p style="text-align: right;">E1</p>	<p>Int 2 of 5 On - Default</p>  <p>M10060_01</p> <p style="text-align: right;">E2</p>	<p>Int 2 of 5 Off</p>  <p>M10061_01</p> <p style="text-align: right;">E3</p>	<p>Int 2 of 5 Checksum On</p>  <p>M10235_01</p> <p style="text-align: right;">E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>Int 2 of 5 Checksum Off</p>  <p>M10234_01</p> <p style="text-align: right;">A1</p>	<p>Int 2 of 5 Checksum Stripped from Result On</p>  <p>M10065_01</p> <p style="text-align: right;">A2</p>	<p>Japan Post On</p>  <p>M10292_02</p> <p style="text-align: right;">A3</p>	<p>Japan Post Off - Default</p>  <p>M10293_02</p> <p style="text-align: right;">A4</p>
<p>KIX (Dutch Post) Code On</p>  <p>M10290_02</p> <p style="text-align: right;">B1</p>	<p>KIX (Dutch Post) Code Off - Default</p>  <p>M10291_02</p> <p style="text-align: right;">B2</p>	<p>Korean Post On</p>  <p>M10358_01</p> <p style="text-align: right;">B3</p>	<p>Korean Post Off - Default</p>  <p>M10359_01</p> <p style="text-align: right;">B4</p>
<p>Maxicode On</p>  <p>M10067_02</p> <p style="text-align: right;">C1</p>	<p>Maxicode Off - Default</p>  <p>M10066_01</p> <p style="text-align: right;">C2</p>	<p>Matrix 2 of 5 On</p>  <p>M10069_01</p> <p style="text-align: right;">C3</p>	<p>Matrix 2 of 5 Off - Default</p>  <p>M10068_01</p> <p style="text-align: right;">C4</p>
<p>Micro PDF417 On</p>  <p>M10073_01</p> <p style="text-align: right;">D1</p>	<p>Micro PDF417 Off - Default</p>  <p>M10072_01</p> <p style="text-align: right;">D2</p>	<p>MSI Plessey On</p>  <p>M10076_01</p> <p style="text-align: right;">D3</p>	<p>MSI Plessey Off - Default</p>  <p>M10077_01</p> <p style="text-align: right;">D4</p>
<p>NEC 2 of 5 On</p>  <p>M10082_01</p> <p style="text-align: right;">E1</p>	<p>NEC 2 of 5 Off - Default</p>  <p>M10083_01</p> <p style="text-align: right;">E2</p>	<p>PDF417 On - Default</p>  <p>M10070_01</p> <p style="text-align: right;">E3</p>	<p>PDF417 Off</p>  <p>M10071_01</p> <p style="text-align: right;">E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>Pharmacode On</p>  <p>M10275_02</p> <p>A1</p>	<p>Pharmacode Off - Default</p>  <p>M10274_03</p> <p>A2</p>	<p>Pharmacode Normal Barcode Decoding (Left to Right)</p>  <p>M10281_02</p> <p>A3</p>	<p>Pharmacode Reverse Barcode Decoding (Right to Left)</p>  <p>M10280_02</p> <p>A4</p>
<p>All QR Code On - Default</p>  <p>M10101_02</p> <p>B1</p>	<p>All QR Code Off</p>  <p>M10351_03</p> <p>B2</p>	<p>Standard QR Code On - Default</p>  <p>M10095_03</p> <p>B3</p>	<p>Standard QR Code Off</p>  <p>M10096_02</p> <p>B4</p>
<p>Straight 2 of 5 On</p>  <p>M10241_01</p> <p>C1</p>	<p>Straight 2 of 5 Off - Default</p>  <p>M10240_01</p> <p>C2</p>	<p>Telepen On</p>  <p>M10103_01</p> <p>C3</p>	<p>Telepen Off - Default</p>  <p>M10104_01</p> <p>C4</p>
<p>Trioptic On</p>  <p>M10041_01</p> <p>D1</p>	<p>Trioptic Off - Default</p>  <p>M10040_01</p> <p>D2</p>	<p>UK Plessey On</p>  <p>M10237_02</p> <p>D3</p>	<p>UK Plessey Off - Default</p>  <p>M10236_02</p> <p>D4</p>
<p>UK Royal Mail On</p>  <p>M10294_02</p> <p>E1</p>	<p>UK Royal Mail Off - Default</p>  <p>M10295_02</p> <p>E2</p>	<p>UPC On - Default</p>  <p>M10105_01</p> <p>E3</p>	<p>UPC Off</p>  <p>M10106_01</p> <p>E4</p>
















ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>UPC E Expansion On</p>  <p>M10108_01</p> <p>A1</p>	<p>UPC E Expansion Off - Default</p>  <p>M10107_01</p> <p>A2</p>	<p>UPC Supplemental On</p>  <p>M10110_01</p> <p>A3</p>	<p>UPC Supplemental Off - Default</p>  <p>M10109_01</p> <p>A4</p>
<p>UPU ID-Tag On</p>  <p>M10360_02</p> <p>B1</p>	<p>UPU ID-Tag Off - Default</p>  <p>M10361_02</p> <p>B2</p>	<p>USPS Intelligent Mail/IMB/4-State CB On</p>  <p>M10286_02</p> <p>B3</p>	<p>USPS Intelligent Mail/IMB/4-State CB Off - Default</p>  <p>M10287_02</p> <p>B4</p>
<p>USPS Planet On</p>  <p>M10284_02</p> <p>C1</p>	<p>USPS Planet Off - Default</p>  <p>M10285_02</p> <p>C2</p>	<p>USPS Postnet On</p>  <p>M10282_02</p> <p>C3</p>	<p>USPS Postnet Off - Default</p>  <p>M10283_02</p> <p>C4</p>
<p>Keyboard Language Settings</p>	<p>US English Keyboard Mapping - No Leading 0</p>  <p>M10111_01</p> <p>D2</p>	<p>US English Keyboard Mapping - with Leading 0 for Non Printable ASCII</p>  <p>M10411_01</p> <p>D3</p>	<p>Keyboard Control Characters for Non Printable ASCII</p>  <p>M10412_01</p> <p>D4</p>
<p>Belgium Keyboard</p>  <p>M10115_01</p> <p>E1</p>	<p>French Keyboard</p>  <p>M10414_01</p> <p>E2</p>	<p>German Keyboard</p>  <p>M10415_01</p> <p>E3</p>	<p>Japanese Keyboard</p>  <p>M10416_01</p> <p>E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>Spanish (Latin America) Keyboard</p>  <p>M10120_02</p> <p style="text-align: right;">A1</p>	<p>Swiss Keyboard</p>  <p>M10116_01</p> <p style="text-align: right;">A2</p>	<p>Universal Keyboard Mapping</p>  <p>M10413_01</p> <p style="text-align: right;">A3</p>	<p>Intentionally Blank</p> <p style="text-align: right;">A4</p>
<p>Operating System Settings</p>	<p>Alternative Operating System (Linux/Mac) On</p>  <p>M10123_02</p> <p style="text-align: right;">B2</p>	<p>Alternative Operating System (Linux/Mac) Off - Default</p>  <p>M10122_02</p> <p style="text-align: right;">B3</p>	<p>Intentionally Blank</p> <p style="text-align: right;">B4</p>
	<p>Reset to USB Factory Defaults</p>  <p>M10002_02</p> <p style="text-align: right;">C2</p>	<p>USB Keyboard Mode</p>  <p>M10200_01</p> <p style="text-align: right;">C3</p>	<p>USB Downloader Mode</p>  <p>M10004_02</p> <p style="text-align: right;">C4</p>
<p>USB HID POS (Terminal ID 131)</p>  <p>M10425_01</p> <p style="text-align: right;">D1</p>	<p>USB Native Two Way Mode</p>  <p>M10006_02</p> <p style="text-align: right;">D2</p>	<p>USB Virtual COM One Way Mode</p>  <p>M10005_01</p> <p style="text-align: right;">D3</p>	<p>USB Virtual COM Multiple Ports</p>  <p>M10431_01</p> <p style="text-align: right;">D4</p>
<p>USB Virtual COM Common Port</p>  <p>M10432_01</p> <p style="text-align: right;">E1</p>	<p>RS232 Settings</p>	<p>Reset to RS232 Factory Defaults</p>  <p>M10389_02</p> <p style="text-align: right;">E3</p>	<p>RS232 Interface 1200 Baud Rate</p>  <p>M10392_01</p> <p style="text-align: right;">E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>RS232 Interface 2400 Baud Rate</p>  <p>M10393_01</p> <p style="text-align: right;">A1</p>	<p>RS232 Interface 4800 Baud Rate</p>  <p>M10394_01</p> <p style="text-align: right;">A2</p>	<p>RS232 Interface 9600 Baud Rate</p>  <p>M10395_01</p> <p style="text-align: right;">A3</p>	<p>RS232 Interface 19200 Baud Rate</p>  <p>M10396_01</p> <p style="text-align: right;">A4</p>
<p>RS232 Interface 38400 Baud Rate</p>  <p>M10397_01</p> <p style="text-align: right;">B1</p>	<p>RS232 Interface 57600 Baud Rate</p>  <p>M10398_01</p> <p style="text-align: right;">B2</p>	<p>RS232 Interface 115200 Baud Rate - Default</p>  <p>M10399_01</p> <p style="text-align: right;">B3</p>	<p>RS232 Interface 7 Data Bits</p>  <p>M10390_01</p> <p style="text-align: right;">B4</p>
<p>RS232 Interface 8 Data Bits - Default</p>  <p>M10391_01</p> <p style="text-align: right;">C1</p>	<p>RS232 Interface Stop Bits 1 - Default</p>  <p>M10406_01</p> <p style="text-align: right;">C2</p>	<p>RS232 Interface Stop Bits 2</p>  <p>M10407_01</p> <p style="text-align: right;">C3</p>	<p>RS232 Interface Even Parity</p>  <p>M10400_01</p> <p style="text-align: right;">C4</p>
<p>RS232 Interface Odd Parity</p>  <p>M10401_01</p> <p style="text-align: right;">D1</p>	<p>RS232 Interface No Parity - Default</p>  <p>M10402_01</p> <p style="text-align: right;">D2</p>	<p>RS232 Interface Flow Control Off - Default</p>  <p>M10408_01</p> <p style="text-align: right;">D3</p>	<p>RS232 Interface Flow Control - Hardware</p>  <p>M10409_01</p> <p style="text-align: right;">D4</p>
<p>RS232 Packet Mode</p>  <p>M10388_01</p> <p style="text-align: right;">E1</p>	<p>RS232 Raw Mode - Default</p>  <p>M10387_01</p> <p style="text-align: right;">E2</p>	<p>Intentionally Blank</p> <p style="text-align: right;">E3</p>	<p>Intentionally Blank</p> <p style="text-align: right;">E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

<p>Reader Feedback Settings</p>	<p>Beep On Vibrate On - Default</p>  <p>M10140_01</p> <p>A2</p>	<p>Beep Off Vibrate Off</p>  <p>M10143_01</p> <p>A3</p>	<p>Beep Off Vibrate On</p>  <p>M10141_01</p> <p>A4</p>
<p>Beep On Vibrate Off</p>  <p>M10142_01</p> <p>B1</p>	<p>Beep Volume 100% - Default</p>  <p>M10197_01</p> <p>B2</p>	<p>Beep Volume 67% - Default</p>  <p>M10196_01</p> <p>B3</p>	<p>Beep Volume 33% - Default</p>  <p>M10195_01</p> <p>B4</p>
<p>Beep Volume 0% - Default</p>  <p>M10194_01</p> <p>C1</p>	<p>Scan Delay Settings</p>	<p>Duplicate Scan Disabled - Default</p>  <p>M10144_01</p> <p>C3</p>	<p>1 Second Duplicate Scan Delay</p>  <p>M10145_01</p> <p>C4</p>
<p>2 Second Duplicate Scan Delay</p>  <p>M10146_01</p> <p>D1</p>	<p>3 Second Duplicate Scan Delay</p>  <p>M10147_01</p> <p>D2</p>	<p>5 Second Duplicate Scan Delay</p>  <p>M10148_01</p> <p>D3</p>	<p>10 Second Duplicate Scan Delay</p>  <p>M10149_01</p> <p>D4</p>
<p>30 Second Duplicate Scan Delay</p>  <p>M10150_01</p> <p>E1</p>	<p>1 Hour Duplicate Scan Delay</p>  <p>M10151_01</p> <p>E2</p>	<p>1 Day Duplicate Scan Delay</p>  <p>M10152_01</p> <p>E3</p>	<p>Intentionally Blank</p> <p>E4</p>

ID-200-IM3-2-S Configuration Guide

NOTE: The configuration change will take effect immediately and be saved to memory.

Reader Commands	<p>Reader ID and Firmware Version</p>  <p>M10157_01</p> <p style="text-align: right;">A2</p>	<p>Reader Text Commands On</p>  <p>M10137_01</p> <p style="text-align: right;">A3</p>	<p>Reader Text Commands Off - Default</p>  <p>M10136_01</p> <p style="text-align: right;">A4</p>
	<p>Reset, Clear and Save Reader Settings</p>  <p>M10139_01</p> <p style="text-align: right;">B2</p>	<p>Clear All JavaScript Rules</p>  <p>M10138_02</p> <p style="text-align: right;">B3</p>	<p>Reboot Reader</p>  <p>M10296_01</p> <p style="text-align: right;">B4</p>
Intentionally Blank	Intentionally Blank	Intentionally Blank	Intentionally Blank
C1	C2	C3	C4
Intentionally Blank	Intentionally Blank	Intentionally Blank	Intentionally Blank
D1	D2	D3	D4
Intentionally Blank	Intentionally Blank	Intentionally Blank	Intentionally Blank
E1	E2	E3	E4

GERMANY

di-soric Solutions GmbH & Co. KG

Steinbeisstraße 6

73660 Urbach

Germany

Fon: +49(0)7181/9878-0

Fax: +49(0)7181/9878-177

solutions@di-soric.com

www.di-soric-solutions.com

