

# OLE Q15 V 2000 P3K-TSSL


## Laser Through Beam Sensor, Receiver

- Small design
- High resolution, switching accuracy, switching frequency
- Robust metal casing



### Safety instructions

Inproper use may result in hazardous radiation exposure. Pay attention to accident prevention rules and laser class. The instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments. These instruments shall exclusively be used by qualified personnel.

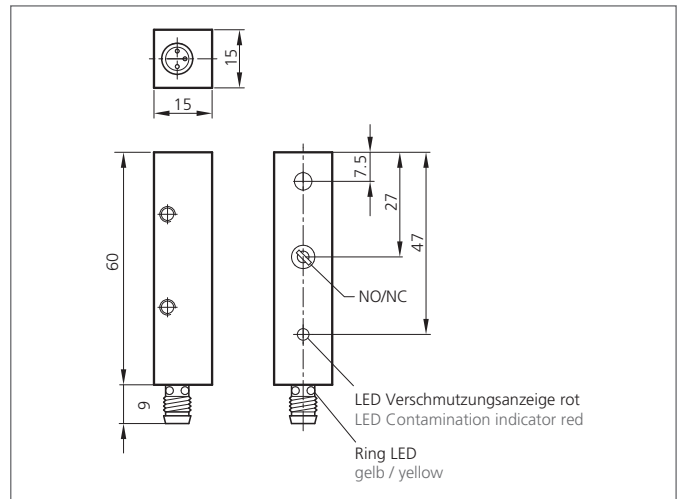

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Through beam sensors, receiver, switching output
Evaluation	digital
Size	15 x 15 x 60 mm (Dimensions)
Design	cuboid design
Service voltage	15 ... 28 V DC
Internal power consumption	< 24 mA
Operating distance	0 ... 2.000 mm
Resolution	Ø 0,3 mm
Sensitivity adjustment	no setting elements
Switching output	pnp, 200 mA, NO/NC, switchable
Switching hysteresis	< 0,1 mm
Voltage drop	< 2,0 V
Switching frequency	1.200 Hz
Ambient temperature	+5 ... +45 °C
Ambient light immunity	20 kLx
Insulation voltage endurance	500 V
Protection class	IP 67
Protection degree	III, operation on protective low voltage
Casing material	brass nickel plated
Material	glass (Window)
Connection	Connector, M8, 3-poled