


MINISTOP Motor Brake Relay BI 9023



- nach IEC/EN 60 947-4-2
- DC brake with one way rectified brake voltage
- Suitable for all squirrel cage motors
- Easy to fit also in existing circuits
- Wear- and maintenance free
- To mount on 35 mm DIN rail
- Adjustable brake current to 80 A
- Adjustable braking time 1 ... 20 s (others on request)
- 90 mm width

Function Diagram

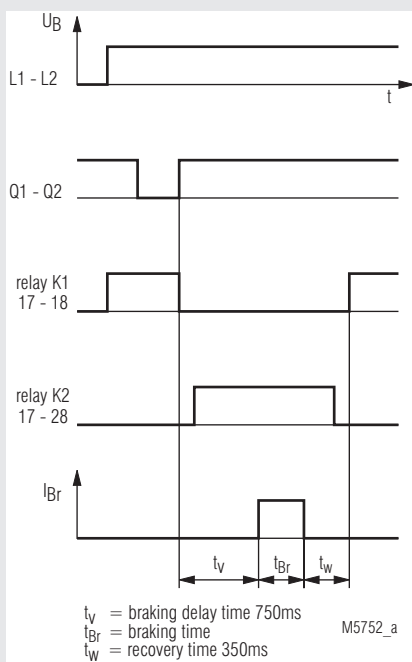

Approvals and Markings



Application

- Saws
- Centrifuges
- Woodworking machines
- Textile machines
- Conveyor systems


Function

The auxiliary supply is connected to terminals A1 - A2. The braking voltage is connected to terminals L1 - L2. A green LED indicates that supply voltage is connected. The interlocking contact of the motor contactor is connected to Q1 - Q2. The motor can be started. If the braking voltage is missing the unit goes into failure state and the motor cannot be started.

The DC braking voltage is supplied from the terminals T1 - T2 to the motor.


When the contact on terminals Q1 - Q2 is opened the brake unit goes into braking mode. When closing the contact again the output 17 - 18 opens and 17 - 28 closes. The motor contactor K1 is disabled. By a special time control it is guaranteed, that the motor contactor K1 is open before the braking contactor K2 comes and the braking current is switched on. As a result the back EMF voltage is already low so the power semiconductor cannot be destroyed by induce high voltage.

Block Diagram

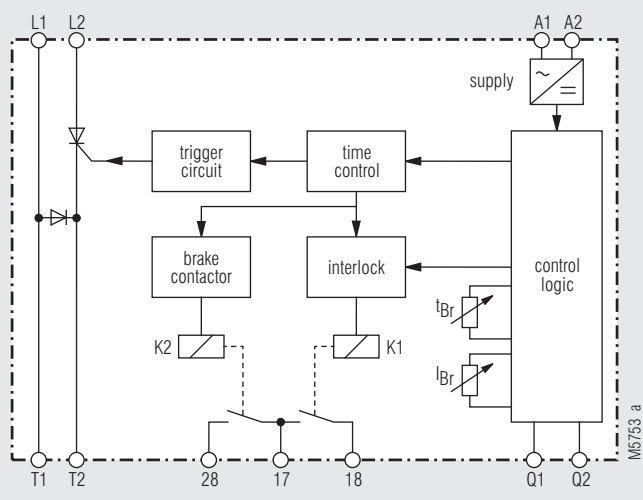


A braking cycles has the following sequence. The motor contactor is switched off. After a fixed safety time the contact 17 - 28 closes and switches on the braking contactor K2. For the adjusted time now the braking current flows through the motor windings. After the time is elapsed, the braking current is switched off, K2 is de-energized and contact 17 - 18 closes to enable a new start with K1.

Circuit Diagrams

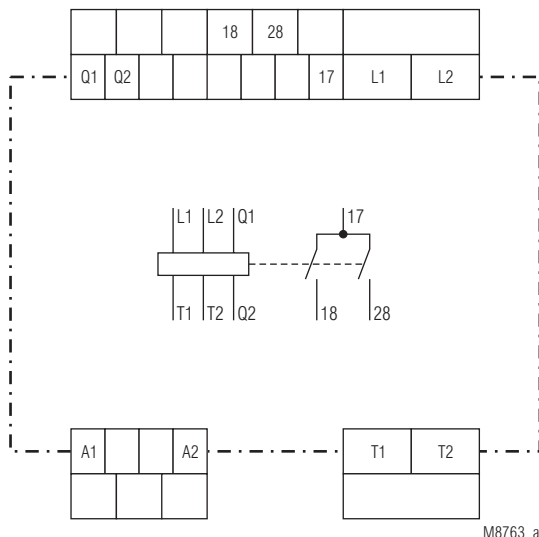

BI 9023 Device with U_H = AC 400 V

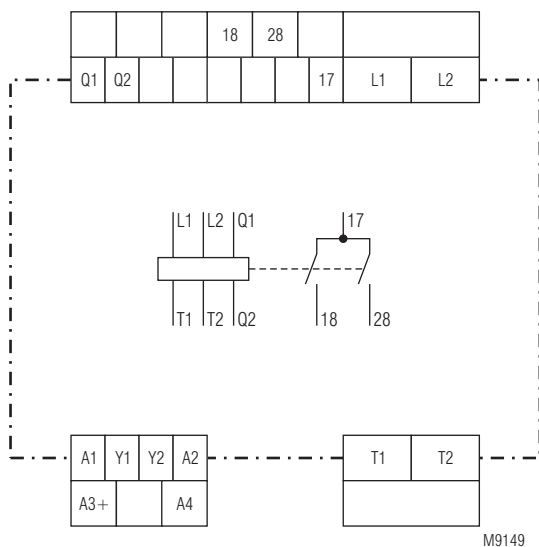

BI 9023 Device with U_H = AC 230 V, 115 V, DC 24 V

Indicators

Green LED: ON, when auxiliary supply connected
„ON“: Flashing, when braking

Relais K1

Yellow LED: ON, when contact 17 - 18 closed

Relais K2

Yellow LED: ON, when contact 17 - 28 closed
„ERROR“: Flashing, when contact 17-28 open
1*): Overtemperature on thyristor (internal)
6*): Wrong frequency
4*): Voltage L1 - L2 missing

1 - 6*) = Number of pulses in flashing sequence

Notes

The braking current is generated by phase control. The value is depending on the voltage connected to L1 - L2, the current setting and resistance of the motor windings. It is therefore possible, that the current with full scale setting is much higher than the permitted max current.

To achieve the optimum braking effect, the braking current I_b should be max 1.8 to 2 times the motor nominal current. This is the saturation current of the magnetic field necessary to brake. A higher current leads only to overheating of the motor. A better braking effect is achieved, when using 2 or more motor windings to brake. The permitted duty cycle is depending on braking current and ambient temperature.

Technical Data

Nominal voltage U_N :

3 AC 200 V -10 % ... 480 V +10 %

Auxiliary voltage U_H :

Device with AC 400 V

(Standardtype):

Device with AC 115/230 V
DC 24 V:

A1/A2, AC 400 V, +10 %, -15 %,

A1/A2, AC 115 V, +10 %, -15 %,

bridge A1-Y1, bridge A1-Y2

A1/A2, AC 230 V, +10 %, -15 %,

bridge Y1-Y2

A3/A4, DC 24 V, +10 %, -15 %,

no bridge

50/60 Hz

Nominal frequency:

Motor power

at 400 V:

max adjustable

braking current:

15 kW

60 A at 60 cycles / h

and 20 s braking time,

80 A at 20 cycles / h

and 20 s braking time

≤ 6600 A²s

DC 0 ... 90 V

adjustable 1 ... 20 s

Fuse, superfast:

Braking voltage:

Braking time:

Back-EMF braking

time delay:

Wire connection

Load terminals:

750 ms

1 x 10 mm² solid

1 x 6 mm² stranded ferruled

A current of 60 A or 80 A is permitted at

a.m. duty cycles for 6 mm² wiring

Control terminals:

1 x 4 mm² solid or

1 x 2.5 stranded ferruled (isolated) or

2 x 1.5 mm² stranded ferruled

(isolated)

DIN 46 228-1/-2/-3/-4 or

2 x 2.5 mm² stranded ferruled

DIN 46 228-1/-2/-3

Wire fixing

Load terminals:

Plus-minus terminal screws M 4

box terminals with self-lifting

clamping piece

Control terminals:

Plus-minus terminal screws M 3.5

box terminals with self-lifting

clamping piece

Mounting:

To mount on 35 mm DIN rail

EN 50 022

General Data

Temperature range:

0 ... + 45 °C

Storage temperature:

- 25 ... + 75 °C

Clearance and creepage distances

rated impulse voltage /

pollution degree

Controlvoltage to auxiliary-

voltage, motor voltage:

4 kV / 2

IEC 60 664-1

EMC

Electrostatic discharge:

8 kV (air)

IEC/EN 61 000-4-2

HF-irradiation:

10 V/m

IEC/EN 61 000-4-3

Fast transients:

2 kV

IEC/EN 61 000-4-4

Surge voltages

between

wires for power supply:

1 kV

IEC/EN 61 000-4-5

between wire and ground:

2 kV

IEC/EN 61 000-4-5

Degree of protection

Housing:

IP 40

IEC/EN 60 529

Terminals:

IP 20

IEC/EN 60 529

Vibration resistance:

Amplitude 0.35 mm

Frequency 10 ... 55 Hz, IEC/EN 60 068-2-6

Climate resistance:

0 / 055 / 04

IEC/EN 60 068-1

Power consumption

for control:

2 VA

Contacts:

2 NO

5 A / AC 400 V

Degree of protection:

IP 20

IEC/EN 60 529

Weight:

780 g

Dimensions

Width x height x depth:

90 x 85 x 120 mm

Standard Type

BI 9023 60 A AC 400 V 50/60 Hz 1 ... 20 s
Article number: 0057302
Width: 90 mm

Ordering Example

BI 9023 60 A AC 400 V 50 / 60 Hz 1 ... 20 s

Braking time
Nominal frequency
Nominal voltage
max braking current
Type

Control Input

Opening the contact on terminals Q1 - Q2 enables the braking cycle, closing the contact will start the braking

Relay Outputs

17, 18: Control of motor contactor
17, 28: Control of braking contactor

Adjustment Facilities


Potentiometer	Description	Initial setting
I_{Br}	braking current	left end of scale
t_{Br}	braking time	middle of scale

Set-up Procedure


The braking time t_{Br} is adjusted on the unit together with the braking current I_{Br} (max 1.8 ... 2 I_N). If the motor has stopped and is still humming, the braking current is too high or the braking time too long. Current and time has then to be adjusted accordingly.

To avoid damage of the unit the braking current should be verified with a moving coil or true RMS current meter.


Connection Examples

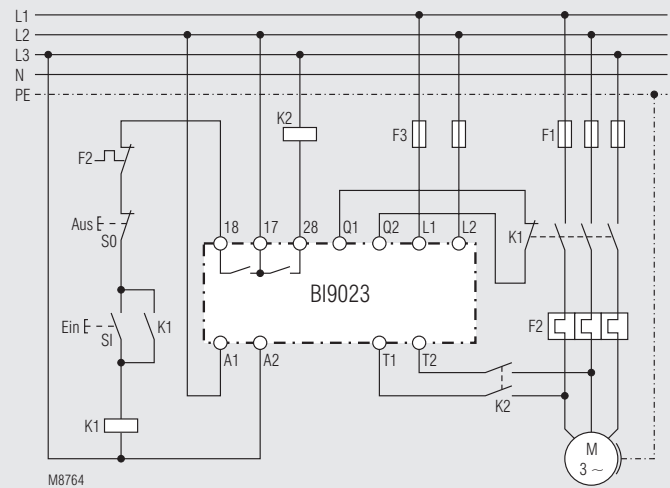

Basic circuit for standard type
BI 9023 with $U_H = AC 400 V$

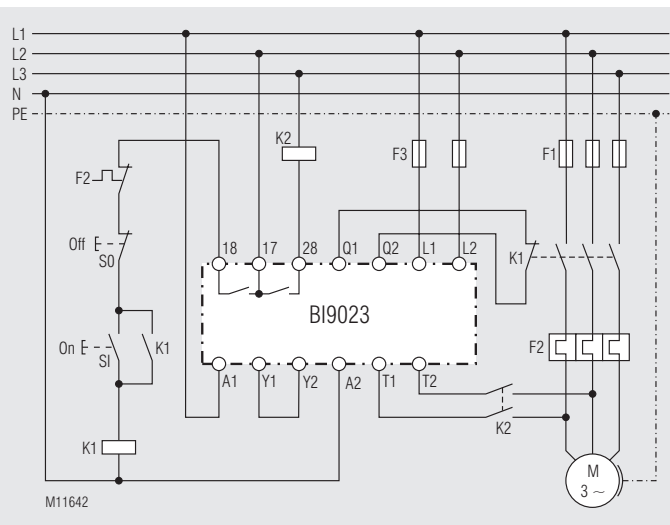

BI 9023 with $U_H = AC 230 V$

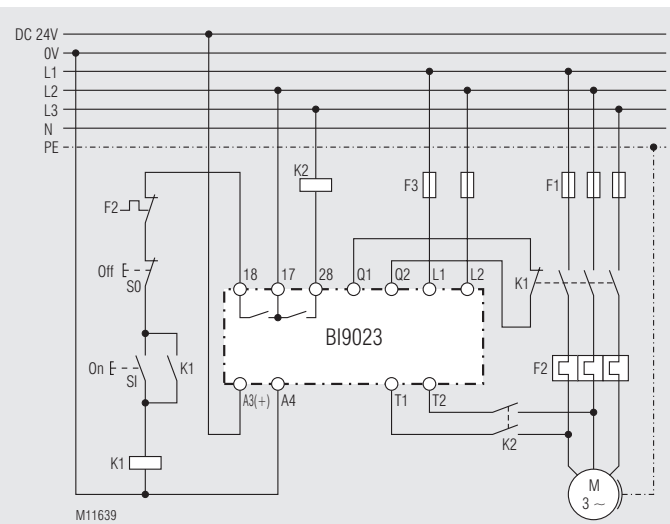

BI 9023 with $U_H = DC 24 V$

