Features

- 1-channel
- DC version, negative polarity
- Working voltage 26.5 V at 10 μ A
- Series resistance max. 273 Ω
- Fuse rating 50 mA
- DIN rail mounting
- High power version
- · Replaceable fuse


Function

The Zener Barrier prevents the transfer of unacceptably high energy from the safe area into the hazardous area.

The zener diodes in the Zener Barrier are connected in the reverse direction. The breakdown voltage of the diodes is not exceeded in normal operation. If this voltage is exceeded, due to a fault in the safe area, the diodes start to conduct, causing the fuse to blow. The Zener Barrier has a negative polarity, i. e. the cathodes of the zener diodes are grounded.


Additionally this Zener Barrier is equipped with a replaceable fuse. This high power version has a smaller serial resistance and therefore provides higher voltage to the field device.



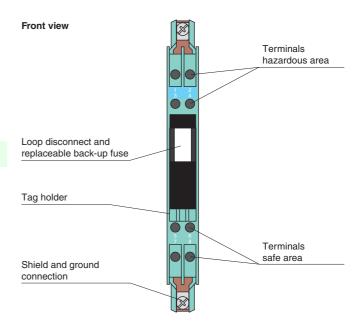

دد (۵

Connection

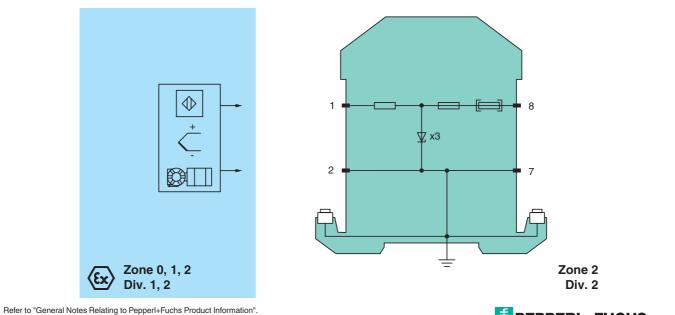

Pepperl+Fuchs Group www.pepperl-fuchs.com pa

USA: +1 330 486 0002 pa-info@us.pepperl-fuchs.com Germany: +49 621 776 2222 pa-info@de.pepperl-fuchs.com

2 Singapore: +65 6779 9091 m pa-info@sg.pepperl-fuchs.com



General specifications		
Туре		DC version, negative polarity
Electrical specifications		
Nominal resistance		240 Ω
Series resistance		max. 273 Ω
Fuse rating		50 mA
Hazardous area connectio	n	
Connection		terminals 1, 2
Safe area connection		
Connection		terminals 7, 8
Working voltage		max. 27 V , 26.5 V at 10 μA
Conformity		Πάλ. 27 V, 20.5 V at 10 μA
•		
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		-20 60 °C (-4 140 °F)
Storage temperature		-25 70 °C (-13 158 °F)
Relative humidity		max. 75 %, without moisture condensation
Mechanical specifications	5	
Degree of protection		IP20
Connection		self-opening connection terminals, max. core cross-section 2 x 2.5 mm ²
Mass		approx. 150 g
Dimensions		12.5 x 115 x 110 mm (0.5 x 4.5 x 4.3 in)
Construction type		modular terminal housing, see system description
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with Ex-areas		
EC-Type Examination Certificate		BAS 00 ATEX 7096 , for additional certificates see www.pepperl-fuchs.com
Group, category, type of protection		⟨ II (1)GD, I (M1) [Ex ia] IIC, [Ex iaD], [Ex ia] I (-20 °C ≤ T _{amb} ≤ 60 °C) [circuit(s) in zone 0/1/2]
Voltage	Uo	28 V
Current	I _o	120 mA
Power	Po	830 mW
Supply		
Maximum safe voltage	U _m	250 V
Series resistance		min. 235 Ω
Statement of conformity		TÜV 99 ATEX 1484 X, observe statement of conformity
Group, category, type of protection, temperature class		(x) II 3G Ex nA II T4 [device in zone 2]
Directive conformity		
Directive 94/9/EC		EN 60079-0:2012, EN 60079-11:2012, EN 60079-15:2010
International approvals		
FM approval		
Control drawing		116-0118
UL approval		
Control drawing		116-0355 (cULus)
CSA approval		/
Control drawing		116-0119
General information		
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com.

Refer to "General Notes Relating to Pepperl+Fuchs Product Information". Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0002 pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222 pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 pa-info@sg.pepperl-fuchs.com



2