



## Model Number

**UC300-F43-2KIR2-V17**


Twin-head system

## Features

- Current output 4 mA ... 20 mA
- 2 relay outputs
- Serial Interfaces
- Temperature compensation
- Reverse polarity protection
- Programmable with ULTRA 3000

## Diagrams

### Characteristic response curve

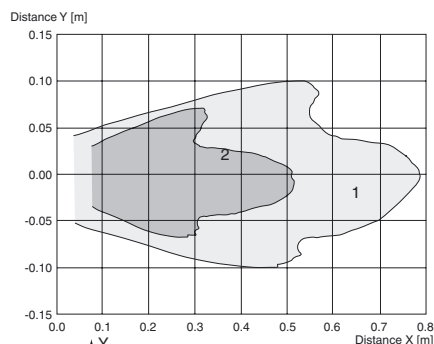

Curve 1: flat surface 100 mm x 100 mm  
Curve 2: round bar, Ø 25 mm

## Technical data

### General specifications

Sensing range	0 ... 300 mm
Unusable area	0 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 390 kHz
Response delay	minimum (EM; NONE): ≤20 ms (2 measuring cycles) factory setting (EM, MXN, 5, 2): ≤60 ms (6 measuring cycles) dynamic (EM,DYN): ≤30 ms (3 measuring cycles)

### Indicators/operating means

LED green	continuous: object in the measuring window flashing: object outside the measuring window
LED red	error (e. g. interference level too high)

### Electrical specifications

Operating voltage $U_B$	10 ... 30 V DC ripple ± 10 % <sub>SS</sub>
-------------------------	---

Power consumption $P_0$	≤ 2 W (all relays pulled-in, current output 20 mA) no-load power consumption ≤ 0.7 W
-------------------------	---

### Interface

Interface type	RS 232, 9600 bit/s, no parity, 8 data bits, 1 stop bit
----------------	--

### Output

Output type	2 relay outputs, 1 analog output 4 ... 20 mA
Resolution	0.2 mm
Deviation of the characteristic curve	< 0.2 % of full-scale value
Repeat accuracy	≤ 0.1 % of full-scale value
Range hysteresis H	0 ... 15 % programmable with ULTRA 2001
Load impedance	current output: ≤ 500 Ω at $U_B ≥ 17V$ ≤ 200 Ω at $U_B < 17V$

Contact loading	60 V DC/1 A (max. 24 W DC), ohmic
-----------------	-----------------------------------

Life span	electrical: $3 \times 10^5$ switching cycles at resistive load (1 A / 24 V DC) mechanical: $10^7$ switching cycles
Temperature influence	≤ 2 % of full-scale value

### Ambient conditions

Ambient temperature	0 ... 70 °C (32 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

### Mechanical specifications

Connection type	Connector M12 x 1, 8-pin screen connected to pin 8
Protection degree	IP65
Material	
Housing	PBT
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam
Mass	290 g


### Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

### Approvals and certificates


UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤36 V

## Dimensions

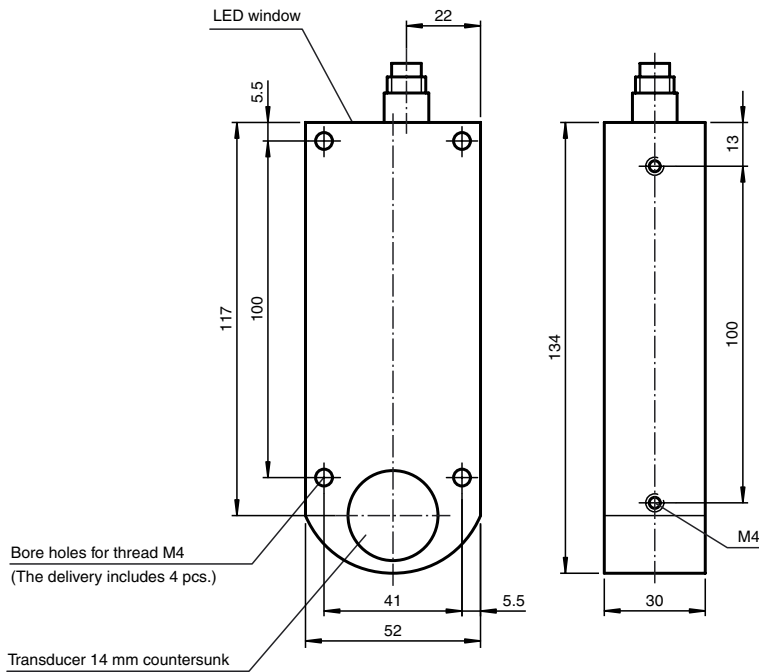


## Electrical Connection

Standard symbol/Connection:



## Pinout



Wire colors

1	WH	(white)
2	BN	(brown)
3	GN	(green)
4	YE	(yellow)
5	GY	(gray)
6	PK	(pink)
7	BU	(blue)
8	RD	(red)

## Additional Information

### Basic setting

**OM:**

Relay 1: NO

Relay 2: NO

**SD1/SD2:**

Switch point relay 1 = 25 mm

Switch point relay 2 = 50 mm

**NDE/FDE:**

Analogue output: 4 mA  $\Rightarrow$  25 mm

20 mA  $\Rightarrow$  300 mm

**FSF:**

Error  $\Rightarrow$  Relay 1 and 2: latest state

$\Rightarrow$  Analogue output: I<sub>OUT</sub> = 3,9 mA

**NEF:**

No echo  $\Rightarrow$  error message

**MA,S:**

Switching mode

## Accessories

### UC-F43-R2

#### ULTRA3000

Software for ultrasonic sensors, comfort line

#### V17-G-2M-PUR

Female cordset, M12, 8-pin, shielded, PUR cable

#### V17-G-5M-PUR

Female cordset, M12, 8-pin, shielded, PUR cable

Thanks to its extensive command set, the sensor can be configured to suit the application via the RS 232 interface.

### RS 232 command set (overview)

Command	Meaning	Parameter	Access
VS0	Velocity of Sound at 0 °C	Velocity of sound at 0 °centigrade VS0 in [cm/s] {10000 ... 60000}	read and set
VS	Velocity of Sound	Velocity of sound VS in [cm/s]	read
TO	Temperature Offset	TO in [0.1 K] {-200 ... 200}	read and set
TEM	TEMPerature	TEM in [0.1 K]	read and adapt to TO
REF	REFerence measurement	REF distance in [mm]	adaptation of VS0
SD1	Switching Distance 1	Switching point, relay 1 SD1 in [mm] {1 ... 800}	read and set
SD2	Switching Distance 2	Switching point, relay 2 SD2 in [mm] {1 ... 800}	read and set
SH1	Switching Hysteresis 1	Hysteresis, relay 1 in [%] {0 ... 15}	read and set
SH2	Switching Hysteresis 2	Hysteresis, relay 2 in [%] {0 ... 15}	read and set
NDE	Near Distance of Evaluation	Near measuring window limit in [mm] {1 ... 800}	read and set
FDE	Far Distance of Evaluation	Far measuring window limit in [mm] {1 ... 800}	read and set
BR	Unusable area (Blind Range)	Unusable area in [mm] {0 ... 800}	read and set
RR	Range Reduction	reduces sensing range [mm] {0 ... 800}	read and set
CBT	Constant Burst Time	Burst length {0,1, 2, 3}	read and set
CCT	Constant Cycle Time	Time in [ms] {0 ... 1000}	read and set
FTO	Filter TimeOut	Number of measurements without echo to be filtered {0 ... 255}	read and set
EM	Evaluation Method	Evaluation method { 0 = NONE; PT1[,f,p,c]; MXN[,m,n]; DYN[,p] }	read and set
CON	CONservative filter	Counter threshold as number {0 ... 255}	read and set
OM	Output Mode	OM coded [normally-open = 0, normally-closed = 1, inactive = I]	read and set
FSF	Fail Safe Function	Failure function type e.g. FSF,11,35 {0,1,2}, [fault current in 0.1 mA], -1 = current output indifferently	read and set
MD	Master Device	Function as master {0 = NONE},AD,RD,RT,SS,ADB,RDB,RTB }	read and set
MA	Main Application	Determines whether the green LED orients on analogue output or switching outputs {A,S}	read and set
NEF	No Echo Failure	Sensor behaviour when no echo is present {0,1}	read and set
AD	Absolute Distance	Distance in [mm]	read
RD	Relative Distance	Relative distance as number {0 ... 4095}	read
RT	RunTime	Echo run time in machine cycles [1 machine cycle = 1.085 µs]	read
SS1	Switching State 1	SS1 binary [0: inactive, 1 active] (independent of OM)	read
SS2	Switching State 2	SS2 binary [0: inactive, 1 active] (independent of OM)	read
ADB	Absolute Distance Binary	Distance in [mm] not as ASCII	read
RDB	Relative Distance Binary	Relative distance as number {0 ... 4095} not as ASCII	read
RTB	RunTime Binary	Echo run time in machine cycles [1 machine cycle = 1.085 µs] not as ASCII	read
ER	Echo Received	Echo detected: no, yes [0/1]	read
VER	VERsion	Version string: xxxx	read
ID	IDentification	ID string: P&F UC300-F43-2KIR2-V17...	read
DAT	DATE	Date string: e.g. Date: 04/12/02 Time: 11:14:35	read
ST	STatus	Status as hexadecimal string	read
RST	ReSeT	Performs a reset	Command
DEF	DEFault settings	Restores defaults	Command
SUC	Store User Configuration	Stores all settings	Command
RUC	Recall User Configuration	Restores stored settings	Command

Release date: 2013-02-25 13:49 Date of issue: 2013-10-25 120332\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com



Release date: 2013-02-25 13:49 Date of issue: 2013-10-25 120332\_eng.xml