





C ∈ c(





#### **Model Number**

#### MLV41-54-G/82b/103/123/124

Retroreflective sensor with 5-pin, M12 x 1 connector


#### **Features**

- Rugged series in corrosion-resistant metal housing
- Reliable recognition of reflective objects and clear glass
- Two machines in one: clear object detection or reflection operating mode with long range
- TEACH-IN switch for setting the contrast detection levels
- Automatic adjustment in case of soiling in contrast detection mode
- Resistant against noise: reliable operation under all conditions


#### **Product information**

The unique and extremely popular design of the MLV41 series enables it be mounted correctly in confined areas and offers all the functions that are normally only found on larger phototelectric sensors. The MLV41 series comes with a range of functions. For example, highly visible status LEDs on the front and back, resistance to ambient light, crosstalk protection and universally applicable output stages that permit every possible switching logic and polarity to be realized. The enhanced resistance to ambient light ensures reliable operation even where modern energy-saving lamps with electronic ballasts are in use. The same applies where multiple devices are present, i.e. the use of a number of sensors in the same vicinity causes no problems.

#### **Dimensions**

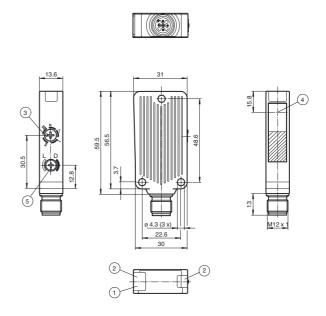

### **Electrical connection**




- O = Light on
- = Dark on

### **Pinout**



### Indicators/operating means

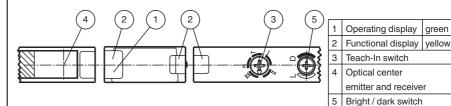

Technical data		
General specifications		
Effective detection range		0 4 m in TEACH mode 0 5.2 m at switch position "N"
Reflector distance		0 4 m in TEACH mode
Threshold detection range		0 5.2 m at switch position "N" 6.5 m
· ·		LIGE O vollantos
Reference target		H85-2 reflector
Light source		LED
Light type		modulated visible red light, 660 nm
Angle deviation		max. ± 1°
Diameter of the light spot		approx. 100 mm at detection range 4 m
Angle of divergence		1.5 °
Ambient light limit		40000 Lux
Functional safety related parameter	eters	
MTTF <sub>d</sub>		900 a
Mission Time (T <sub>M</sub> )		20 a
Diagnostic Coverage (DC)		0%
J , ,		0 76
Indicators/operating means		
Operating display		LED green, statically lit Power on , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz)
Function display		2 LEDs yellow for switching state, stability control, TEACH-IN
Controls		and contrast detection mode rotary switch for light/dark, 5-step switch for contrast recognition
		adjustment
Contrast detection levels		10 % - clean, water filled PET bottles
		18 % - clear glass bottles 40 % - colored glass or opaque materials
		adjustable due to TEACH-IN switch
Electrical apositiontions		adjustable due to TEAGIT IIV SWITCH
Electrical specifications		10 20 1/ 00
Operating voltage	U <sub>B</sub>	10 30 V DC
Ripple		max. 10 %
No-load supply current	I <sub>0</sub>	max. 35 mA
Input		
Function input		Ext. Teach-In input (ET)
Output		
Pre-fault indication output		1 PNP function reserve output (alarm), short-circuit protected, protected from reverse polarity, open collector
Switching type		light/dark on switchable
Signal output		1 PNP output, short-circuit protected, reverse polarity protected, open collector
Switching voltage		max. 30 V DC
Switching current		max. 100 mA
Voltage drop	U <sub>d</sub>	≤ 2.5 V DC
Switching frequency	f	1000 Hz
Response time	•	0.5 ms
Ambient conditions		o.o mo
		40 00 00 / 40 440 05)
Ambient temperature		-40 60 °C (-40 140 °F)
Storage temperature		-40 75 °C (-40 167 °F)
Mechanical specifications		100
Protection degree		IP67
Connection		M12 x 1 connector, 5-pin
Material		
Housing		aluminum , Delta-Seal coated
Optical face		glass pane
Connector		metal
Mass		50 g
Compliance with standards and ves	directi-	
Directive conformity		
EMC Directive 2004/108/EC		EN 60947-5-2:2007
Standard conformity		
Product standard		EN 60947-5-2:2007 IEC 60947-5-2:2007
		120 00041-0-2.2001
Approvals and certificates		
Protection class		II, rated voltage ≤ 50 V AC with pollution degree 1-2 according to IEC 60664-1 , functional insulation acc. to DIN EN
UL approval		50178 cULus Listed 57M3 (Only in association with UL Class 2 power supply; Type 1 enclosure)
CCC approval		CCC approval / marking not required for products rated ≤36 V

## Accessories

### **OMH-41**

Mounting bracket

### **OMH-09**

Mounting bracket for Sensors series MLV41 for M12 rod mounting

#### V15-G-2M-PUR

Female cordset, M12, 5-pin, PUR cable


### V15-W-2M-PUR


Female cordset, M12, 5-pin, PUR cable

Other suitable accessories can be found at www.pepperl-fuchs.com



## **Curves/Diagrams**

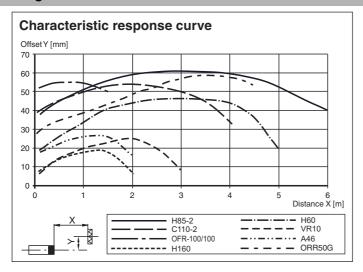

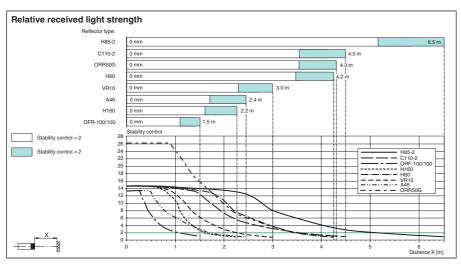

## **Additional information**

## Instructions for the TEACH-IN mode:

Step	Switch position	LED green	LED yellow	Time/ Frequency	Explanations/ Remarks
1	N	on	flashes	4/s	In switch position "N" aligned with reflector.
					Reflector detected without functional reserve.
	N	on	on	-	In switch position "N" aligned with reflector.
					Reflector detected with functional reserve (recommended).
2	Т	off/on	on	200 ms	A new switch position is indicated by the green LED going out briefly.
					This applies also for the selection of the other switch positions.
	Т	flashes	flashes	2.5s	Slow alternating flashing: TEACH-IN process correctly executed.
					Max. duration of the TEACH-IN process: 2 s
	Т	flashes	flashes	8/s	Rapid alternating flashing: TEACH-IN process not correctly executed. (e.g. receiver signal not sufficient, sensor not correctly aligned with reflector)
					Status is terminated by turning switch to position N.
3/1	I	on	on	-	Contrast detection 10 % is activated. (e.g. clean PET bottles filled with water)

 $fa\hbox{-}info@\,us.pepperl-fuchs.com$ 

www.pepperl-fuchs.com



3/2	II	on	on	-	Contrast detection 18 % is activated. (e.g. bottles made of clear glass)
3/3	III	on	on	-	Contrast detection 40 % is activated. (e.g. tinted glass or intransparent materials)

# Alarm output:

### Switch position "N":

Inactive if the functional reserve is used after approx. 5 sec. Immediately inactive if 8 light beam interruptions occur within the flashing time.

## **Ext. TEACH input:**

In switch position "T" it is possible to trigger a TEACH-IN process and to select the corresponding contrast detection level by the external application of a High pulse of a certain width:

I: 50 ms (30 ... 80 ms) II: 150 ms (120 ... 180 ms) III: (220 ... 280 ms) 250 ms N: 350 ms (320 ... 380 ms)

**PEPPERL+FUCHS** 

www.pepperl-fuchs.com