



Model Number


UBH60/30-12GM-U-V1
Single head system

Features

- Thickness measurement with analog output 0 ... 10 V
- Automatic compensation of the reference distance, deactivateable
- Extremely narrow projection cone
- Short response time

Diagrams

Characteristic response curve

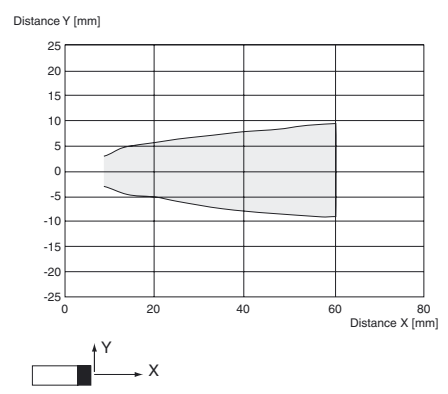


Release date: 2014-06-13 11:46 Date of issue: 2014-06-13 20:49:17_eng.xml

Technical data

General specifications	
Measurement range	object thickness (d) : 0 ... 30 mm
Unusable area	0 ... 15 mm
Reference distance h	50 ... 60 mm
Standard target plate	10 mm x 10 mm
Transducer frequency	approx. 850 kHz
Response delay	approx. 12 ms
Indicators/operating means	
LED yellow	solid: object in evaluation range
LED red	solid red: Error red, flashing: program function, object not detected
Electrical specifications	
Operating voltage U_B	15 ... 30 V DC , ripple 10 % _{SS}
No-load supply current I_0	≤ 30 mA
Time delay before availability t_v	≤ 200 ms
Input	
Input type	1 function input 0-level: $-U_B$ or unwired 1-level: +4 V ... $+U_B$ input impedance: > 4.7 kΩ
Output	
Output type	1 analog output 0 ... 10 V
Resolution	0.17 mm
Deviation of the characteristic curve	± 1 % of full-scale value
Repeat accuracy	± 0.5 % of full-scale value
Load impedance	> 1 kΩ
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Connection type	Connector M12 x 1 , 4-pin
Degree of protection	IP67
Material	
Housing	brass, nickel-plated
Transducer	epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT
Mass	25 g
Compliance with standards and directives	
Standard conformity	EN 60947-5-2:2007 IEC 60947-5-2:2007 EN 60947-5-7:2003 IEC 60947-5-7:2003


Approvals and certificates	
UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤36 V

Dimensions

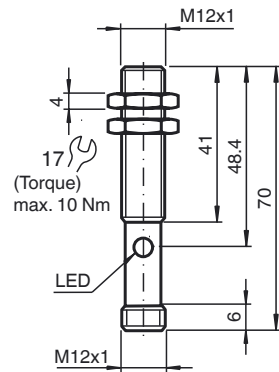


Electrical Connection

Standard symbol/Connections:



Core colors in accordance with EN 60947-5-2.

Pinout




Wire colors in accordance with EN 60947-5-2


1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Additional Information

Mounting

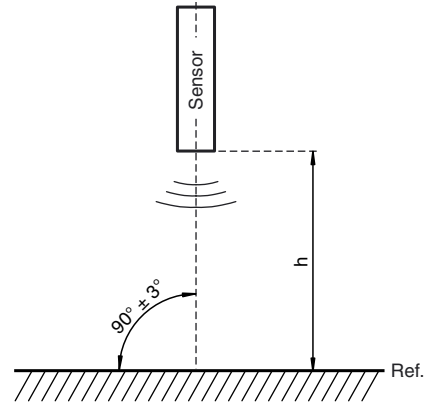

Normal operation

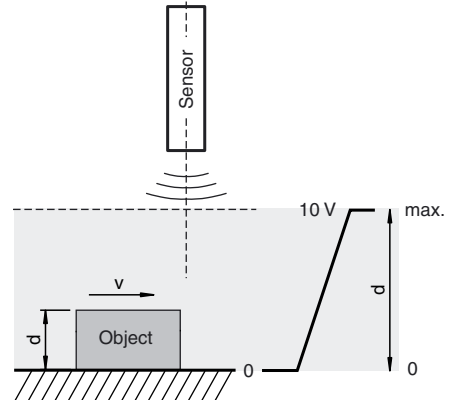

Release date: 2014-06-13 11:46 Date of issue: 2014-06-13 20:49:17_eng.xml

Accessories

BF 5-30

Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm

BF 12

Mounting flange, 12 mm

BF 12-F

Mounting flange with dead stop, 12 mm

V1-G-2M-PVC

Female cordset, M12, 4-pin, PVC cable

V1-W-2M-PUR

Female cordset, M12, 4-pin, PUR cable

Functional description

This sensor is used to measure the thickness of objects. It teaches itself by independently switching to a reference object. The distance *h* to this object serves as a reference distance and defines the object thickness 0 mm. This reference distance can be dynamically tracked in order to compensate for external influences. This guarantees a high measurement accuracy of the sensor over the entire temperature range.

Automatic teach-in process

Immediately after the supply voltage is connected, the sensor automatically references itself to the reference object and teaches in the distance as the reference distance. The distance *h* between the sensor surface and the reference object must lie within the valid range for the reference distance (see Technical Data). The sensor then immediately reverts to normal operation. If no reference object is detected, the red LED flashes (Fault).

Normal operation

In normal operation, the sensor outputs a value at the analog output, which is proportional to the thickness of the object. The object thickness 0 mm (measurement to the reference object) is represented in this by the minimum analog value and the largest measurable object thickness (see Technical Data) is represented by the maximum analog value.

Dynamic tracking of the reference distance

The dynamic tracking of the reference distance can be activated and deactivated by means of the function input circuitry (see Function Input).

Dynamic tracking activated:

(Function input open or connected with $-U_B$)

When measuring an object, the sensor must detect the reference point again within no longer than four seconds in order to be re-referenced to it. Otherwise the object is interpreted as the reference. Then, in accordance with a PTI characteristic with a time constant of 14 s, this distance value becomes the new reference distance.

If the object is incorrectly taught-in as the reference and then moves outside the sensor's detection field so that the greater distance to the actual reference object is measured, the sensor immediately reacts. The new, greater distance is taught-in as the reference without delay.

Dynamic tracking deactivated:

(Function input connected with $+U_B$)

The reference distance automatically taught-in when the sensor is switched on is retained during the entire operation.

Function input

The function input is used to activate/deactivate the dynamic tracking of the reference distance (see above).

LED indicator

Indication as a function of operating status	Red LED	Yellow LED
Teach-in control limit: No reference object detected or reference object at an incorrect distance	Flashes	Off
Normal operation Measurement on object Measurement on reference	Off Off	On Off
Fault	On	Last valid status

Installation conditions

If the sensor is installed at places, where the environment temperature can fall below 0 °C, for the sensors fixation, one of the mounting flanges BF 12, BF 12-F or BF 5-30 must be used. In case of direct mounting of the sensor in a through hole, it has to be fixed at the middle of the housing thread.

Release date: 2014-06-13 11:46 Date of issue: 2014-06-13 20:49:17_eng.xml