


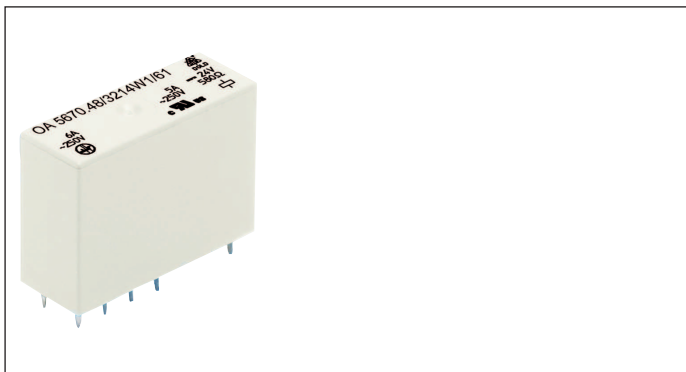


- According to DIN EN 61810-1, DIN EN 61810-3
- With forcibly guided contacts
- **double and reinforced insulation between contact sets acc. to EN 50178**
- High dielectric strength
- High mechanical service life
- High switching reliability
- Compact size
- High thermal continuous current
- High voltage range
- Wash proof model as option

Applications

- Switchgear for safety technology
- Press controls

Approvals and Markings



Technical Data

Relais type		OA 5670	
1.0 Relais coil			
1.1	Nominal voltage	DC V	6; 12; 20; 24; 48; 60; 110 (others on request)
1.2	Nominal consumption	W	1.0
1.3	Holding power (at 0.5 x UN)	W	0.25
2.0 Contacts			
2.1	Contact arrangement	2 NO and 2 NC; 3 NO and 1 NC	
2.2	Contact material	AgSnO ₂ + 0.2 µm Au; AgNi + 0.2 µm Au, AgNi + 5 µm Au	
2.3	Rated insulation voltage	AC V	250
	Switching voltage min./max	V	AC/DC 10 / DC 250, AC 400 (AC/DC 2 V / 60 V) ¹⁾
2.4	Limiting continuous current I _{th}	A	3 x 6 (see operating voltage limit curve)
	Switching current min./max.	A	10 mA ³⁾ / 6 (2 mA / 0.3 A) ¹⁾
2.5	Switching power min./max.	VA	0.1 / 1500 (10 mVA / 12 VA) ¹⁾
	Switching power min./max.	W	0.1 ³⁾ / 200 (10 mW / 12 W) ¹⁾ (s. limit curve for arc-free operation)
2.6	Switching capacity to IEC/EN 60947-5-1		
	AC 15 ⁴⁾	AC V/A	NO: 250 / 2 NC: 250 / 1
	AC 15 ⁵⁾	AC V/A	NO: 250 / 3 NC: 250 / 1
	DC 13 ⁴⁾	DC V/A	NO: 24 / 1 NC: 24 / 1
	DC 13 ⁴⁾ at 0.1 Hz to UL 508	DC V/A	NO: 24 / 4 NC: 24 / 3 B300 / R300
2.7	Electrical life	switching cycles	at 1 s On, 1 s Off (see contacts service life)
	at AC 230 V, 6 A, cosφ = 1	switching cycles	> 2,6 x 10 ⁵ AgNi
	at DC 24 V, 6 A ohmsch	switching cycles	> 4 x 10 ⁶ AgNi
2.8	Switching frequency max.	switching cycles/s	10
2.9	Response time / Release time	ms	typically 11 / typically 6
2.10	Contact force NO / NC	cN	≥ 10
3.0 Other			
3.1	Mechanical life	switching cycles	≥ 50 x 10 ⁶
3.2	Temperature range	°C	- 40 ... + 75
3.3	Degree of protection, housing	Solder line proof RT II as option wash proof RT III	
3.4	Test procedure	A (group mounting)	
3.5	Vibration resistance	10 ... 200 Hz; NC 5 g; NO 10 g; IEC/EN 60068-2-6	
3.6	Climate resistance	40 / 075 / 04; A / B / D IEC/EN 60068-1	
3.7	Short circuit strength 1 kA / AC 250 V	AgNi or AgSnO ₂	6 A gL IEC/EN 60947-5-1

¹⁾ Values for AgNi-Contacts + 5 µm Au

⁴⁾ Values for AgNi-Contacts

²⁾ 10 A total current at t = 20°C and coil voltage U_N

⁵⁾ Values for AgSnO₂-Contacts

³⁾ Typical values for AgSnO₂ and AgNi

Technical Data				
3.8	Insulation acc. to IEC 60664-1, EN 50178		double and reinforced insulation	
	Rated insulation voltage	AC V		250
	Pollution degree			3
	Overvoltage category			III
	Test voltage			
	Contact-Coil (1 min)	AC kV eff.		≥ 4
	Left contact-right contact (1min)	AC kV eff.		≥ 4
	Contact-Coil (1min)	AC kV eff.		≥ 3
	Open contact acc. to DIN EN 61810-1	AC kV eff.		1.5
	Transient voltage			
	Contact-Coil (1.2 - 50 µs)	kV		≥ 6
	Clearance and creepage distances			
	Contact-Coil	mm		≥ 8
	Left contact-right contact	mm		≥ 5.5
	Contact-Contact	mm		≥ 4.5
3.9	Weight	g		approx. 21
4.0 Packing				
4.1	on cardboard	piece		42
4.2	in case package	piece		210
5.0 Solder method				
5.1	Solder method /-temperature /-duration	°C / s		Wafe soldering / 260 / 5

Design Versions

			OA 5670	
U _N (DC V)	Voltage range (DC V)	Resistance at 20°C Ω±10%	.52	.48
			2NO, 2NC	3NOS, 1NC
AgNi10 + 0,2 μm Au-contacts				
6	4.2 ... 8.4	36	3201	3211
12	8.4 ... 16.8	150	3202	3212
20	14.0 ... 28.0	400	3203	3213
24	16.8 ... 33.6	580	3204	3214
48	33.6 ... 67.2	2300	3205	3215
60	42.0 ... 84.0	3600	3206	3216
110	77.0 ... 154.0	12100	3207	3217
AgSnO ₂ + 0,2 μm Au-contacts				
6	4.2 ... 8.4	36	3221	3231
12	8.4 ... 16.8	150	3222	3232
20	14.0 ... 28.0	400	3223	3233
24	16.8 ... 33.6	580	3224	3234
48	33.6 ... 67.2	2300	3225	3235
60	42.0 ... 84.0	3600	3226	3236
110	77.0 ... 154.0	12100	3227	3237
AgNi10 + 5 μm Au-contacts				
6	4.2 ... 8.4	36	3241	3251
12	8.4 ... 16.8	150	3242	3252
20	14.0 ... 28.0	400	3243	3253
24	16.8 ... 33.6	580	3244	3254
48	33.6 ... 67.2	2300	3245	3255
60	42.0 ... 84.0	3600	3246	3256
110	77.0 ... 154.0	12100	3247	3257

Ordering Example

OA 5670 . . . /  / 61*)

Pin configuration

L = standard, solder line proof RT II

W = wash proof RT III

Design version


Contacts

.52 2 NO, 2 NC


.48 3 NO, 1 NC

Relay type


*) /61 cURus approval

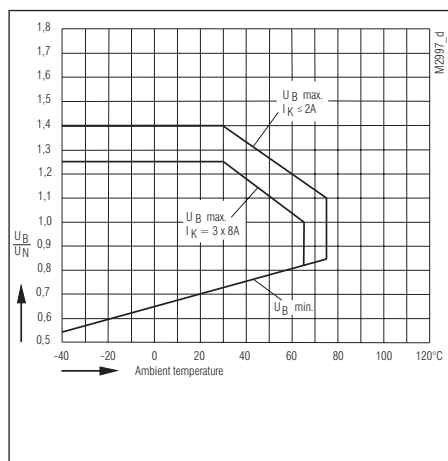


Operating voltage limit curve

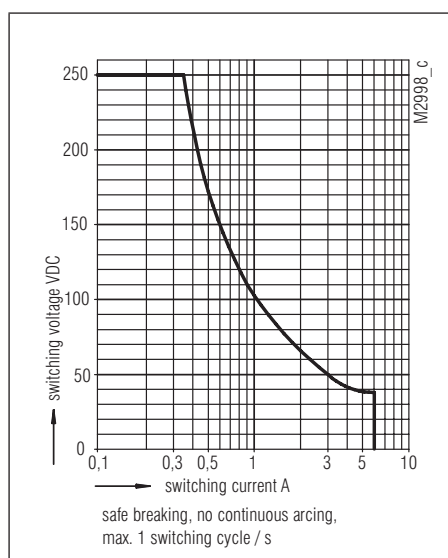

Limit curve for arc-free operation



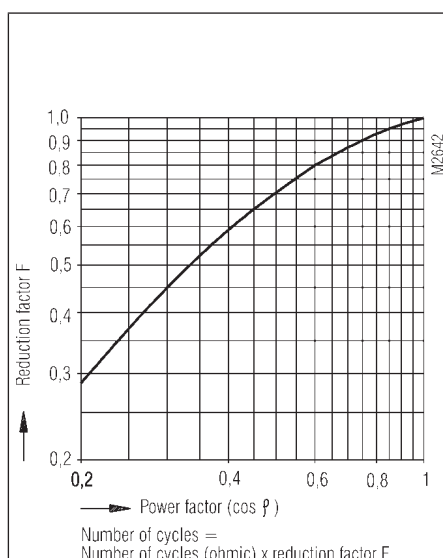


Reduction factor for reactive loads

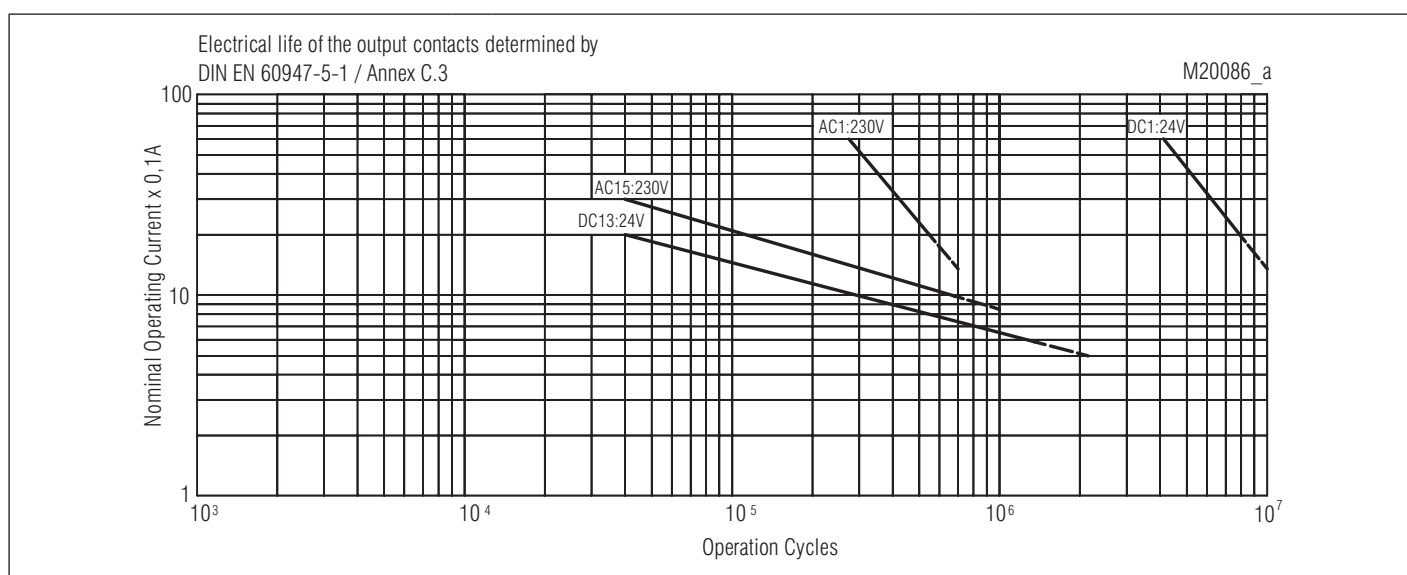


Electrical life for contact material AgNi


Drilling plan (solder side)

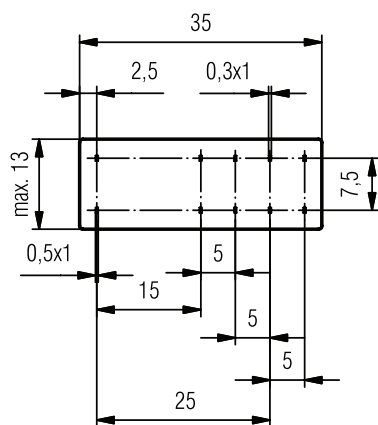


OA5670.52__L1 2NO/2NC




OA5670.48__L1 3NO/1NC




OA5670.52__L2 2NO/2NC



OA5670.48__L2 3NO/1NC




OA5670.52__L3 2NO/2NC



OA5670.52__L4 2NO/2NC

Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

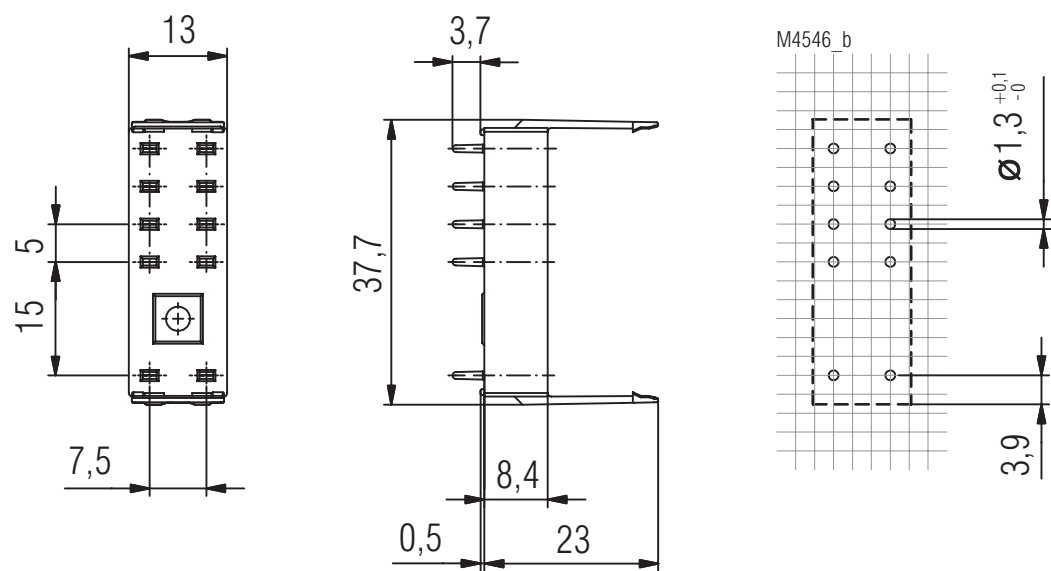

Article number: 0064297

