

- According to DIN EN 61810-1, DIN EN 61810-3
- With forcibly guided contacts
- Clearance and creepage distances
contact-coil ≥ 8 mm,
contact - contact ≥ 5.5 mm


Double and reinforced insulation between contact sets

- Low rated power consumption
- High mechanical service life
- Compact size, small height
- Wash proof model as option

Application

- Switchgear for safety technology
- Escalators and walkways
- Elevators for men and load
- Press controls
- Railway technology

Approvals and Markings



Technical Data

Relay type		OA/OW 5669	
1.0 Relay coil			
1.1 Nominal voltage	DC V	6, 12, 20, 24, 48, 60, 110 (other on request)	
1.2 Nominal consumption	W	0.7	
1.11 Voltage range	U_N	0.8 ... 1.6	
1.3 Holding power (at $0.5 \times U_N$)	W	0.18	
2.0 Contacts			
2.1 Contact arrangement		1 NC / 1NO 2 changeover contacts	
2.2 Contact material		AgSnO ₂ + 0.2 μ m Au; AgNi + 0.2 μ m Au, AgNi + 5 μ m Au	
2.3 Rated insulation voltage	AC V	250	
Switching voltage min./max.	V	AC/DC 10 / DC 250, AC 400 (AC/DC 2 V / 60 V) ¹⁾	
2.4 Limiting continuous current I_{th}	A	2 x 5 (see operating voltage limit curve)	
Switching current min./max.	A	10 mA ³⁾ / 8 (2 mA / 0.3 A) ¹⁾	
2.5 Switching power min./max.	VA	0,1 / 2000 (10 mVA / 12 VA) ¹⁾	
Switching power min./max.	W	0,1 ³⁾ / 200 (10 mW / 12 W) ¹⁾ (see limit curve for arc-free operation)	
2.6 Switching capacity to IEC/EN 60947-5-1			
AC 15 ⁴⁾	AC V/A	NO: 250 / 2	NC: 250 / 1
AC 15 ⁵⁾	AC V/A	NO: 250 / 3	NC: 250 / 2
DC 13 ⁴⁾	DC V/A	NO: 24 / 2	NC: 24 / 1
DC 13 ⁴⁾ at 0.1 Hz to UL 508	DC V/A	NO: 24 / 4	NC: 24 / 4
2.7 Electrical life ²⁾		R300 at 1 s On, 1 s Off (see contacts service life)	
AC 230 V 6 A $\cos \varphi = 1$	switching cycles	$> 2 \times 10^5$ AgSnO ₂	$> 2 \times 10^5$ AgNi
2.8 Switching frequency max.	switching cycles / s	10	
2.9 Response time / Release time	ms	≤ 15 / ≤ 12	
2.10 Contact force	cN	≥ 10 / ≥ 8	
3.0 Other			
3.1 Mechanical life	switching cycles	$\geq 50 \times 10^6$	
3.2 Temperature range	$^{\circ}$ C	- 40 ... + 70 mounted without distance ($I_{th} = 2 \times 5$ A)	
3.3 Degree of protection		Solder line proof RT II as option wash proof RT III	
3.4 Test procedure		A (group mounting)	
3.5 Vibration resistance		10 ... 200 Hz; NC 2 g; NO 10 g; IEC/EN 60068-2-6	
3.6 Climate resistance		40 / 070 / 04; A / B / D IEC/EN 60068-1	
3.7 Short circuit strength 1 kA / AC 250 V	AgSnO ₂ AgNi	10 A gL IEC/EN 60947-5-1 6 A gL IEC/EN 60947-5-1	

¹⁾ Values for AgNi-contacts + 5 μ m Au

²⁾ 10 A total current at $t = 20^{\circ}$ C and coil voltage U_N

³⁾ Typical values for AgSnO₂ and AgNi

⁴⁾ Values for AgNi-contacts

⁵⁾ Values for AgSnO₂-contacts

Technical Data

3.8	Insulation acc. to IEC 60664-1, EN 50178		double and reinforced insulation
	Rated insulation voltage	AC V	250
	Pollution degree		2
	Overvoltage category		III
	Test voltage		
	Contact-coil (1 min)	AC kV eff.	≥ 4
	Contact-contact (1min)	AC kV eff.	≥ 4
	Open contact acc. to DIN EN 61810-1	AC kV eff.	1.5
	Transient voltage		
	Contact-coil (1.2 - 50 µs)	kV	≥ 6
	Clearance and creepage distances		
	Contact-coil	mm	≥ 8
	Contact-contact	mm	≥ 5.5
3.9	Weight	g	approx. 19
4.0 Packing			
4.1	on cardboard in slipcase	piece	56
4.2	in case package	piece	280
5.0 Solder method			
5.1	Solder method /-temperature /-duration	°C / s	Wafer soldering / 260 / 5

Design versions


U _N DC V	Voltage range V	Resistance Ω (± 10%)	AgNi - contacts + 0.2 µm Au			AgNi - contacts + 5 µm Au		AgSnO ₂ - contacts + 0.2 µm Au	
			OA5669.12	OA5669.16		OA5669.12	OA5669.16	OA5669.12	OA5669.16
6	4.8 ... 9.6	50	981	992	462	691	771	581	
12	9.6 ... 19.2	210	982	993	463	692	772	582	553
20	16.0 ... 32.0	580	987	998	468	697	777	587	558
24	19.2 ... 38.4	820	983	994	464	693	773	583	554
48	38.4 ... 76.8	3200	984	995	465	694	774	584	555
60	48.0 ... 96.0	5200	985	996	466	695	775	585	556
110	88.0 ... 176.0	18000	986	997	467	696	776	586	557
				1)	2)		1)		1)

1) = Pin configuration standard


2) = Pin configuration reverse

Ordering example


O_ 5669._ _ / _ _ / 61*)

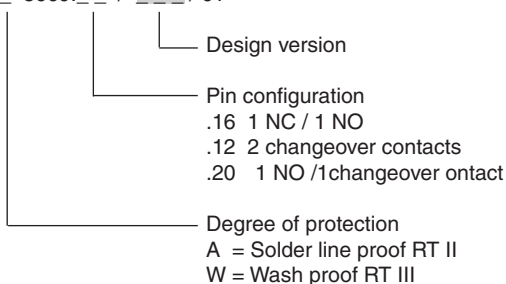


*) /61 cURus approval

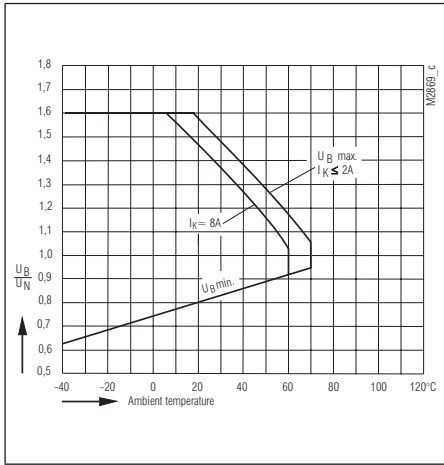


Operating voltage limit curve

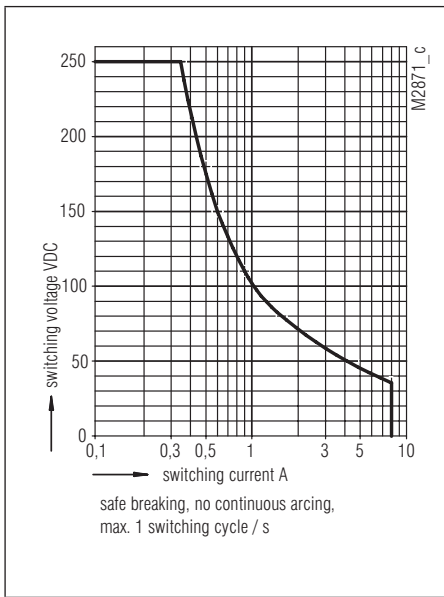

Limit curve for arc-free operation (at $t_u = 20^\circ\text{C}$)
Contact material AgNi

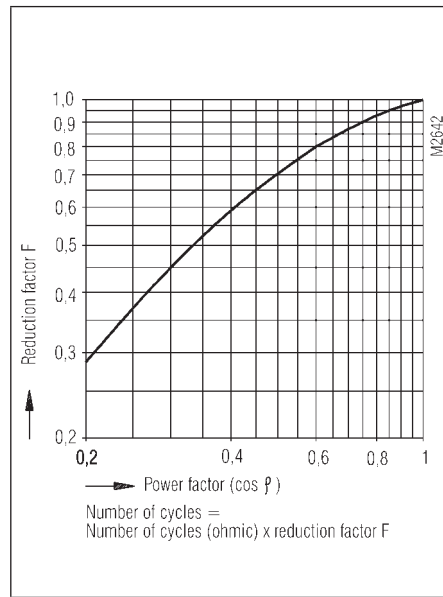


Reduction factor for reactive loads


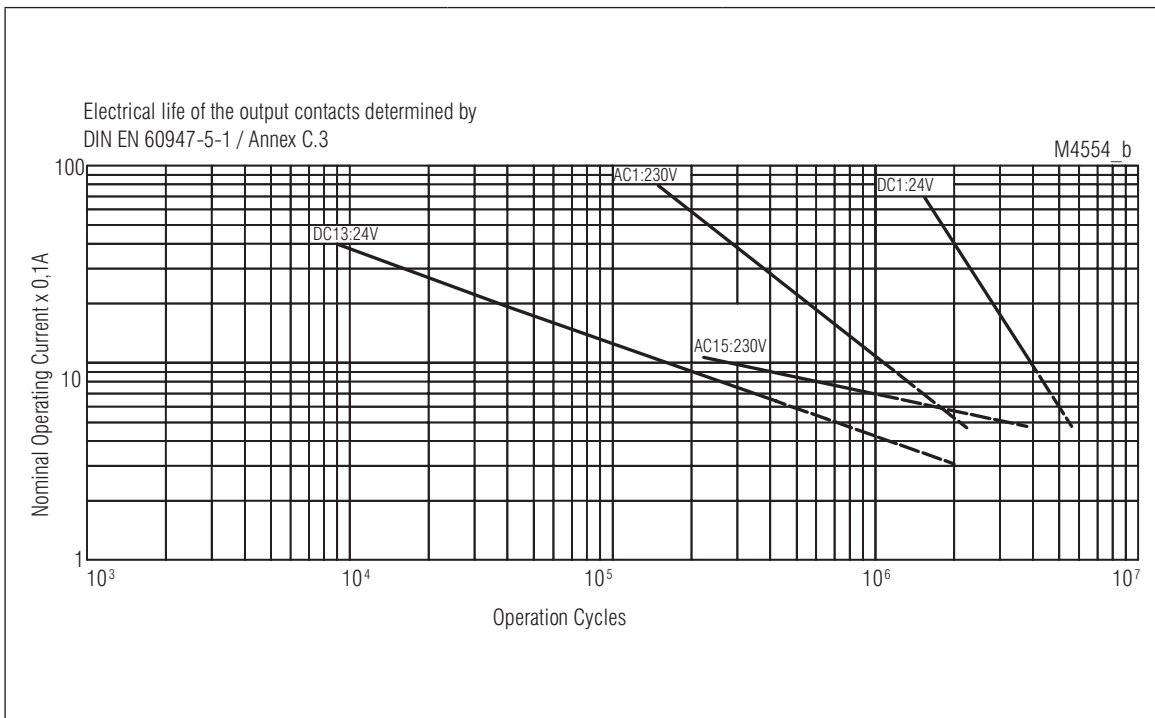


Electrical life for contact material AgNi


Drilling plan (solder side)





Pin configuration standard

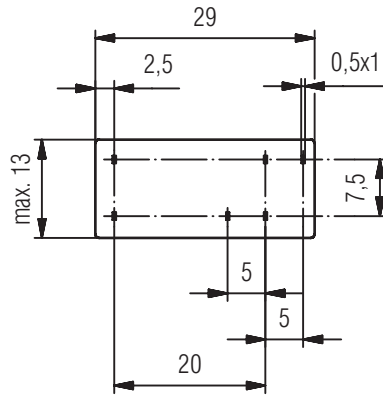




OA5669.16
OW5669.16



Pin configuration reverse



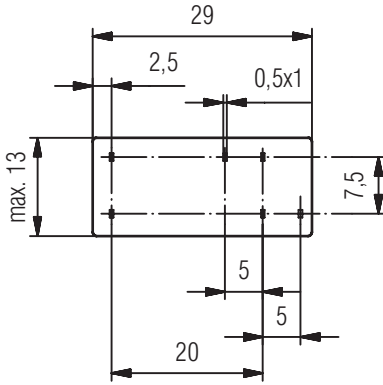


OA5669.16
OW5669.16

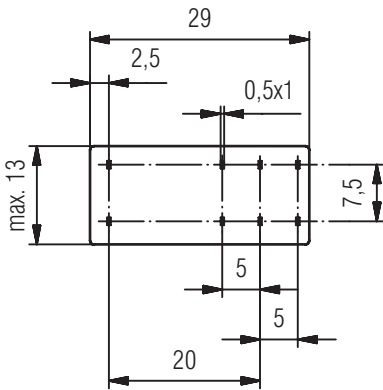

OA5668.12
OW5668.12


OA5669.12
OW5669.12

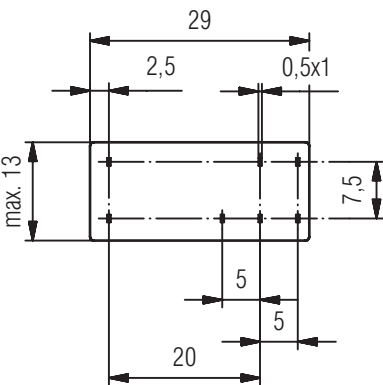

OA5669.20
OW5669.20

Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

Drilling plan (solder side)

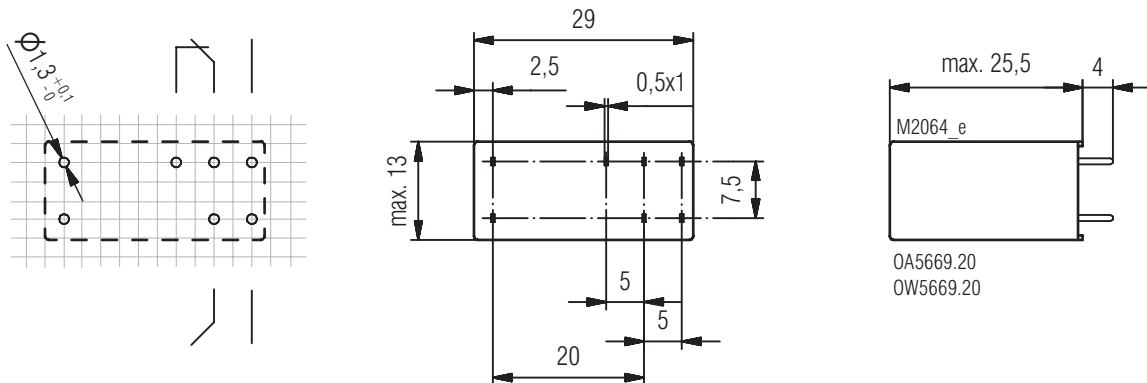

Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

Accessories

Socket ET 1415.021 Fixing clip ET 1415.025	Socket ET 1415.041	Socket ET 1415.044	Socket ET 1415.047
	<ul style="list-style-type: none"> • Socket for DIN-rail • incl. fixing clip 	<ul style="list-style-type: none"> • Socket for DIN-rail • incl. fixing clip 	
		<ul style="list-style-type: none"> • incl. safe separation between coil and contacts according to DIN EN 60947-1, DIN EN 61140, DIN EN 60204 	
Article number: 0034769	Article number: 0055571	Article number: 0059274	Article number: 0059270
	wire connection solid / stranded: 0.14 ... 2.5 mm ² (14 - 20 AWG) wire connection with sleeved end: 0.14 ... 1.5 mm ² (14 - 25 AWG)	wire connection solid / stranded: 0.14 ... 2.5 mm ² (14 - 20 AWG) wire connection with sleeved end: 0.14 ... 1.5 mm ² (14 - 25 AWG)	wire connection solid / stranded / sleeved end: 2 x (0.2 ... 1.5) mm ² (16 - 25 AWG)
Fixing clip (wire): 0034770 Fixing clip (plastic): 0047726	Function modules ET1415.913: DC 24 V, with free-wheel diode and green LED Article number: 0056828 ET1415.911: DC 24 V, with free-wheel diode and red LED Article number: 0055909 ET1415.924: DC 60 V, with free-wheel diode and red LED Article number: 0062552 ET1415.912: AC/DC 24 V, with varistor and green LED Article number: 0055910		

