


## SAFEMASTER STS

### Safety switch- and key interlock system Actuator Module A

Translation of the  
german original

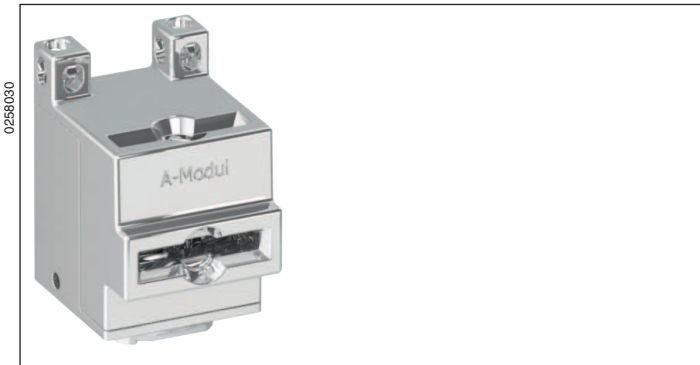


#### STS-System Benefits

- EU-Test certificate according to the directive 2006/42/EG, annex IX
- For safety applications up to PL<sub>e</sub>/Category 4 according to EN/ISO 13849-1
- Modular and expandable system
- Rugged stainless steel design
- Wireless mechanical safeguarding
- Combines the benefits of safety switch, locking module and key transfer in a single system
- Easy installation through comprehensive accessories
- Protection against lock-in
- Coding level low, medium, high according to DIN EN ISO 14119:2014-03

#### Features

- Actuator module 2 insertion openings
- Specifically suited for actuator insertion from the top
- Module expansions possible below the module
- Choice of direction in 4 increments of 90°

#### Installation Examples

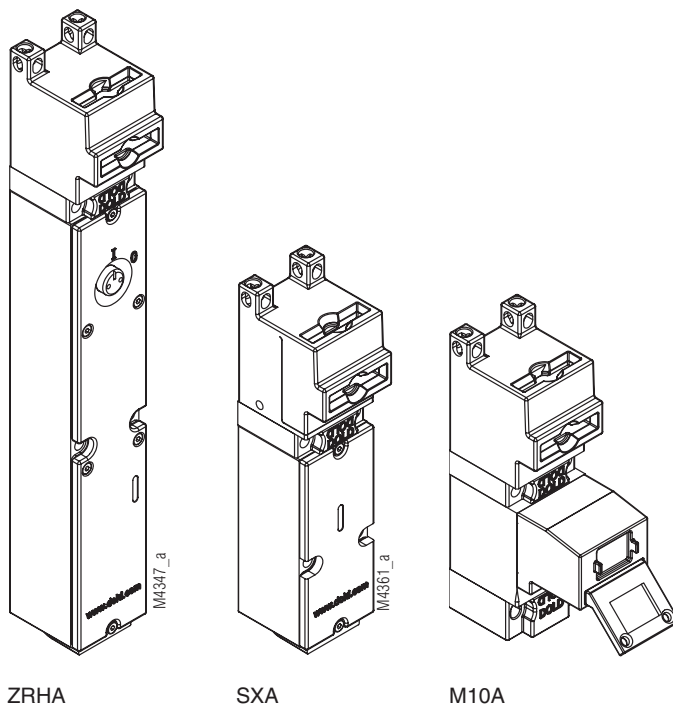

#### Approvals and Marking



#### Application

The actuator module A is built together with other modules into a STS-unit and used in connection with an actuator. The actuator module A is then always the top part of the STS unit and connected with the stationary part of a separating guard while the actuator is mounted on the movable part of a separating guard.

The actuator module A can accommodate the actuator from the front or the top. It can be installed in 4 positions on the STS unit, each turned at 90 degrees.

#### ATTENTION!



**Function modules can be installed only from below the actuator module A.**

#### Design and Operation

The extremely robust and flexible actuator module A ensures safe access, for instance, to a guard or protective door.

The function of the actuator module is ensured only in combination with additional function modules, e.g. switch, door lock and/or key modules. The function modules can only be installed below the actuator module.


These functions are used in the protection of separating guards. It must be ensured then that hazardous movements when opening the movable part of the guard will be stopped.

The actuator module A can transfer the release or locking of a protective door or hood mechanically. A door, for example, can thus be opened or kept closed.


#### Technical Data

Enclosure: Stainless steel V4A / AISI 316  
Ambient temperature: - 40°C bis + 100°C  
Locking force: min. 4000 N  
(in a locked unit e.g M10A)  
Application: only as part of a unit of the  
SAFEMASTER STS series  
Coding level low according to DIN EN ISO 14119:2014-03

#### Dimensional Drawing [mm]

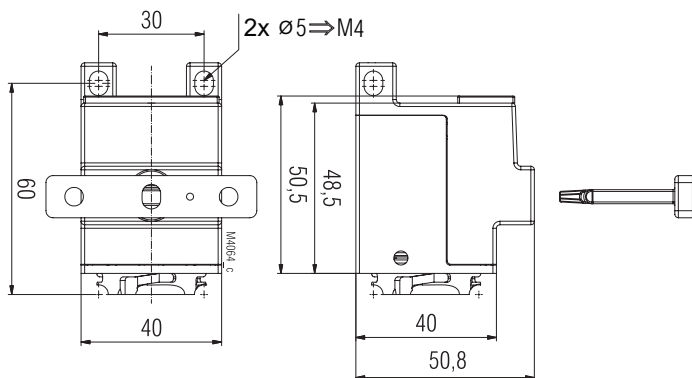

Actuator module A with standard actuator T and closing plate

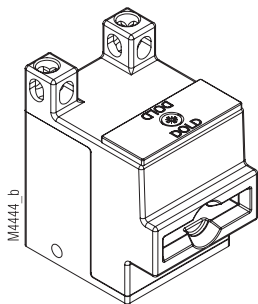

Actuator module A with closing plate

#### Variants and Accessories

Since with the actuator module A an actuator slot always remains open when an actuator is introduced, dirt may enter into the module. In order to prevent this, a separate closing plate is available which can be fastened in the open actuator slot like an anchor.

#### Ordering Designation

Actuator module A  
Article number: 0061872

Closing plate  
Article number: 0064619