

# EE820

## CO<sub>2</sub> Transmitter for Demanding Applications

The EE820 is designed for use in harsh, demanding applications. A multiple point CO<sub>2</sub> and temperature factory adjustment procedure leads to excellent CO<sub>2</sub> measurement accuracy over the entire temperature working range, so the EE820 can even be installed outdoors.

The EE820 incorporates the E+E dual wavelength NDIR CO<sub>2</sub> sensor, which compensates for ageing effects, is highly insensitive to pollution and offers outstanding long term stability. With its robust, functional housing with a special integrated filter the EE820 can be installed in polluted applications such as in agriculture and live stock barns.

For fast response time requirements there is an EE820 version with forced air circulation created by a fan installed behind the filter. An optional M12 connector facilitates easy removal of EE820 before site cleaning operations.



The measured data range of up to 10,000ppm is available on the voltage or current analogue outputs. An optional kit facilitates easy configuration and adjustment of the EE820.

### Typical Applications

- Greenhouses**
- Fruit and vegetable storage**
- Stables**
- Hatchers and Incubators**
- Vehicles, Trains, Trams**

### Key Features

- Autocalibration**
- Outstanding long-term stability**
- Temperature compensation**
- High resistance to pollution**
- Easy installation**

### Technical Data

#### Measured values

Measuring principle	dual wavelength non-dispersive infrared technology (NDIR)	
Measurement range	0...2000 / 5000 / 10000ppm	
Accuracy at 25°C and 1013mbar (77°F...14,7psi)	0...2000ppm:	< ± (50ppm +2% of measured value)
	0...5000ppm:	< ± (50ppm +3% of measured value)
	0...10000ppm:	< ± (100ppm +5% of measured value)
Response time τ <sub>63</sub>	standard:	typ. 300s
	fast:	typ. 140s (with a forced air circulation module)
Temperature dependency	typ. 1ppm CO <sub>2</sub> /°C (-20...45°C) (-4...113°F)	
Sample rate	approx. 15s	

#### Output

0...2000 / 5000 / 10000ppm	0 - 5 / 0 - 10V	-1mA < I <sub>L</sub> < 1mA
	4 - 20mA	R <sub>L</sub> < 500 Ohm


#### General

Supply voltage	24V AC ±20%	15 - 35V DC
Current consumption	standard:	typ. 15mA + output current
	fast:	typ. 60mA + output current
Current peak	max. 350mA for 0.3s	
Warm up time <sup>1)</sup>	< 5 min	
Housing material	Polycarbonate, UL94V-0 approved	
Protection class	IP54	
Electrical connection	Screw terminals 2.5mm <sup>2</sup> or M12 plug	
Electromagnetic compatibility	EN61326-1	EN61326-2-3 Industrial Environment
	FCC Part 15	ICES-003 ClassB
Working conditions	-20...60°C (-4...140°F) 0...100% RH (non-condensing)	
Storage conditions	-20...60°C (-4...140°F) 0...95% RH (non-condensing)	




1) for performance according to specification

## Dimensions (mm/inch)

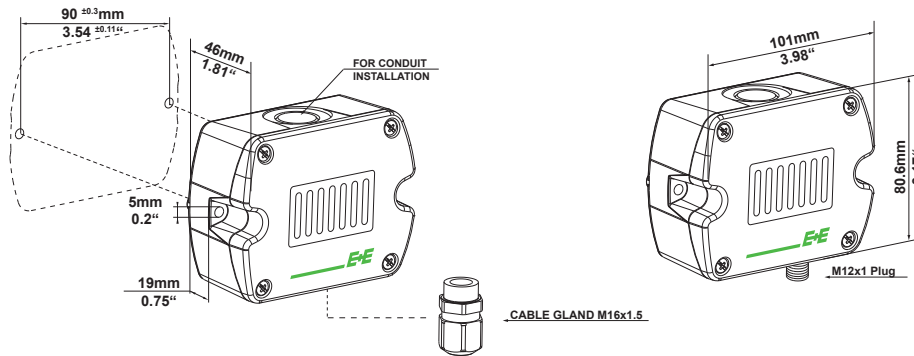


## Connection Diagram

### EE820 with M12 plug<sup>1)</sup>

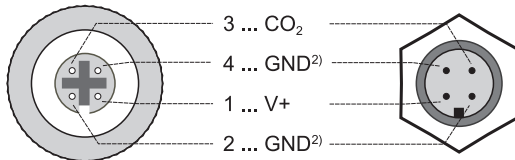

- 1) Mating connector HA010707 is included in the scope of supply  
2) GND internally connected

### EE820 with cable gland

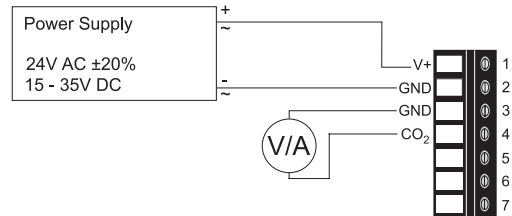

## Ordering Guide

MODEL	OUTPUT	HOUSING	CONNECTION	SCALING	RESPONSE TIME
CO <sub>2</sub>	0-5V (2x)	standard (P)	cable gland (P)	0...2000ppm (002)	standard (S)
	0-10V (3x)			0...5000ppm (005)	fast <sup>1)</sup> (F)
	4-20mA (6x)			0...10000ppm (010)	
<b>EE820-</b>					

1) Includes a forced air circulation module.

## Order Example

### EE820-C6xPP-002S

Model: CO<sub>2</sub>  
Analog output: 4-20mA  
Housing: standard  
Connection: cable gland  
Scaling: 0...2000ppm  
Response time: standard

## Accessories (see data sheet „Accessories“)

Product configuration adapter  
Product configuration software  
Mating connector 4pol. self assembly M12x1  
Connection cable 5 pins, M12x1 socket - flying leads,shielded, 1,5m (3.3ft)  
Connection cable 5 pins, M12x1 socket - flying leads,shielded, 5m (16.4ft)  
Connection cable 5 pins, M12x1 socket - flying leads,shielded, 10m (32.8ft)  
Protective cap for female M12 connectors  
Protective cap for male M12 connectors  
Power supply adapter  
Forced air circulation module  
Replacement cover with filter

see data sheet EE-PCA  
EE-PCS (free download: [www.epluse.com/EE820](http://www.epluse.com/EE820))  
HA010707  
HA010819  
HA010820  
HA010821  
HA010781  
HA010782  
V03  
EE820-FAC  
EE820-COVER

## Scope of Supply

EE820	Cable gland connection	M12 plug connection
EE820 Transmitter according to ordering guide	✓	✓
Cable gland	✓	
Mating connector		✓
Mounting kit	✓	✓
Test report according to DIN EN10204 - 2.2	✓	✓

## Support Literature

[www.epluse.com/EE820](http://www.epluse.com/EE820)