

# Switchgear for Luminaires




Technical Paper  
Dipl.-Ing. Dirk Meyer

## Switchgear for Luminaires

When dimensioning switchgear for luminaires it is important to consider the peculiarities of luminaires when they are switched on and when operating continuously. Depending on the lamp type used overcurrents may occur for a relatively

long time in the preheating phase or extremely high current peaks in the ms range due to capacitor loading processes may occur. These currents must be correlated with the continuous current and the making capacity of the switchgear.

Particular attention should be paid to the switching capacity with capacitive a load if gas discharge lamps are compensated in parallel on the mains.

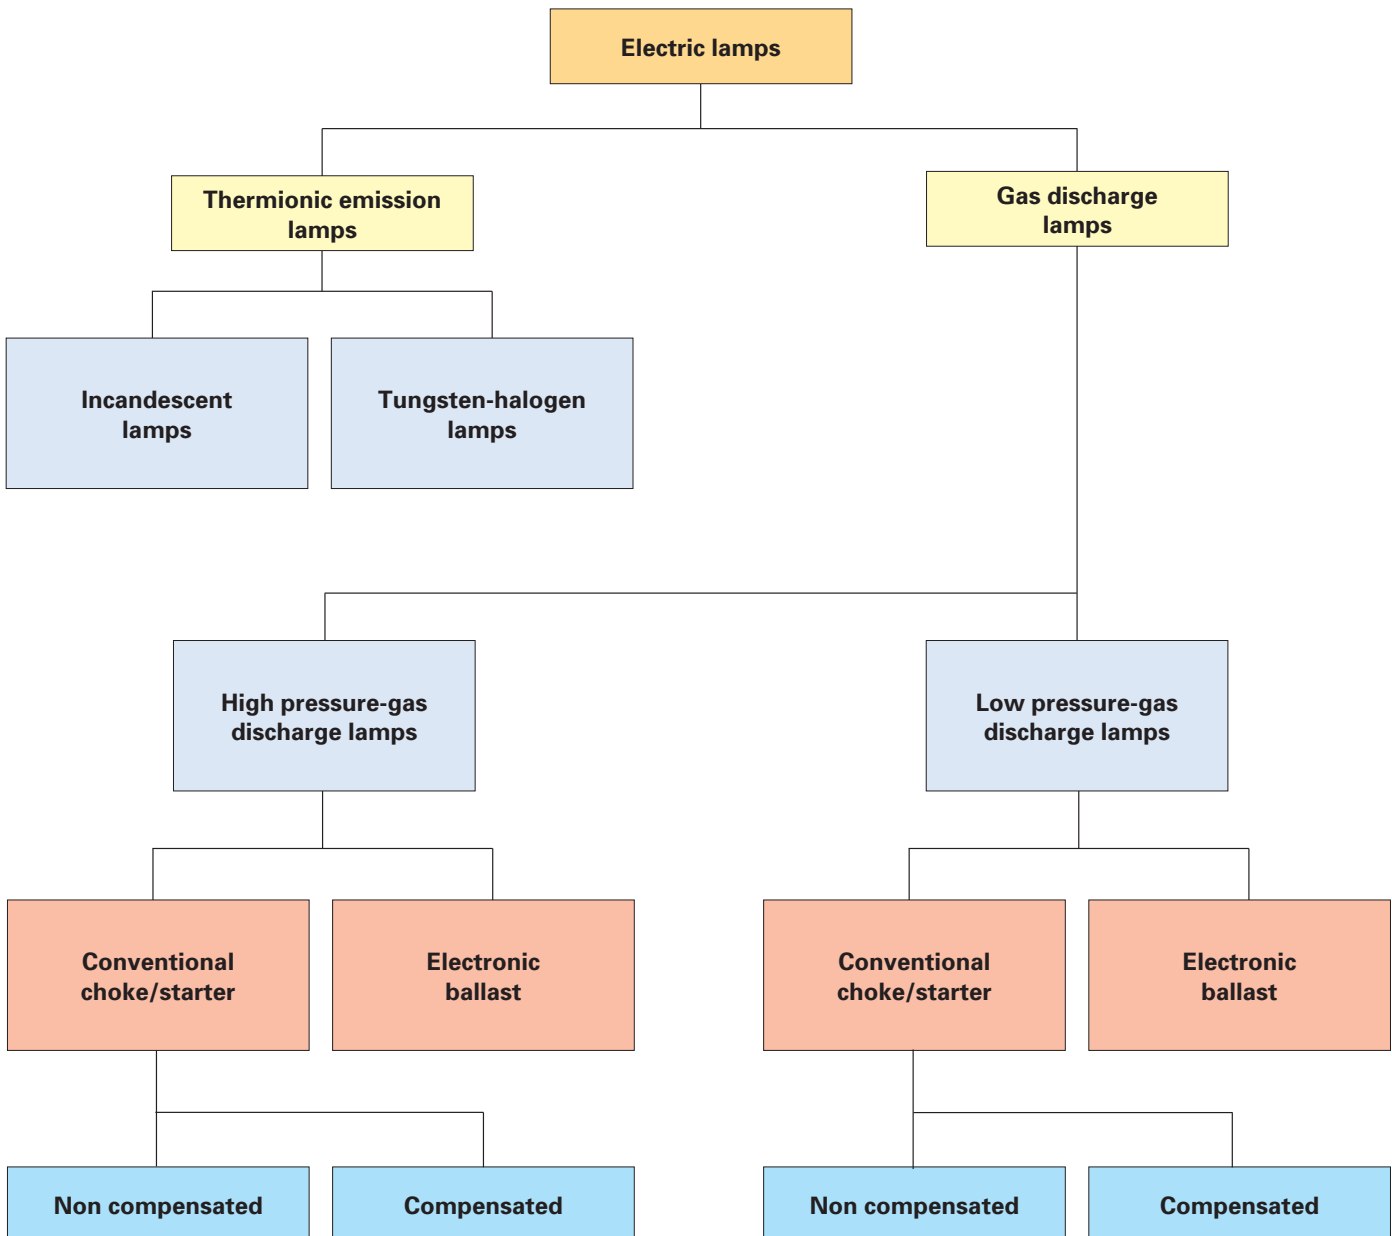



### Incandescent lamps, Tungsten-halogen lamps

On incandescent lamps light is generated by thermionic emission on the filament. In the cold state, the filament of incandescent lamps has an extremely low ohmic resistance. Accordingly peak inrush currents which are up to 16 times lamp operating current can result. The operating current is only simply disconnected when switched off.



### Fluorescent lamps

On fluorescent lamps, the layer of fluorescent material applied to the inner surface of the glass bulb is excited by the UV radiation from the metal vapour discharge. The gas discharge is ignited by a high voltage pulse.

The starting behaviour of fluorescent lamps is essentially determined by the ballast. With conventional choke/starter switching, a slightly increased preheating current (1.25 times operating current) flows for a few seconds before it is reduced to operating current after ignition of the lamp. Power factor correction capacitors are frequently used for compensation of the reactive current caused by the choke. At the instant they are switched on, these capacitors can cause an extremely high switch-on peak which decreases very quickly. Hereby, the making capacity with a capacitive load must be considered. Particularly when the capacitors are connected in parallel the number of lamps per switching device may be considerably reduced. In this case, series compensation (e.g. twin-lamp) is more favourable.

When electronic ballasts are used to stabilize the lamp current, short but high current peaks occur as well which are caused by the capacitor charging process in the lamp electronics. Compact fluorescent lamps, well-known as energy-saving lamps, are also fluorescent lamps with electronic ballasts.





### Sodium-vapour lamps, Mercury-vapour lamps

For these gas discharge lamps, special high-reactance transformers are also available, in addition to choke circuitry. The start-up phase of these lamps, during which the current can reach 2.2 times the operating current, is longer (max. 10 minutes). This ballast is frequently also compensated, the rating of the capacitor must however not exceed the capacitive making capacity.



### Metal-halide lamps

In these high-pressure gas discharge lamps, halides are added to the metal vapours which increase the luminance yield and also have an effect on the emitted light colour.

For these lamps, special starters must be used to provide the high-voltage starting pulse. Chokes are mainly used for limitation of the operating current.

During the start-up phase, a starting current of up to 2.2 times the operating current will flow for a maximum of 10 minutes in these lamps.



### Mercury blended lamps

Mercury blended lamps are metal-vapour lamps without integrated ballasts. Here a filament has a current limiting effect and emits light, and the discharge of metallic vapour excites the layer of fluorescent material by emission of UV radiation. The starting behaviour of mercury blended lamps is similar to that of incandescent lamps.

## Selection of contactors for the actuation of electrical lamps

Special DILL... contactors are available for switching of electrical lamps. The DILM... contactors can also be used for this application. In the following tables you will find the current values and the maximum capacitor load for power factor corrected lamps.

These two limits have to be taken into consideration for the selection of the switchgear:

### 1. Maximum capacitor load that can be switched (with compensated lamps)

|                                      | DIL                          | L12 | L18 | L20 | M7 | M9 | M12 | M17 | M25 | M32 |
|--------------------------------------|------------------------------|-----|-----|-----|----|----|-----|-----|-----|-----|
| Permissible compensation capacitance | $C_{\max}$ [ $\mu\text{F}$ ] | 470 | 470 | 470 | 47 | 80 | 100 | 220 | 330 | 470 |

### 2. Maximum loading of contacts when switching electrical lamps

|  | DIL                          | L12 | L18 | L20 | M7  | M9  | M12 | M17 | M25  | M32  |
|--|------------------------------|-----|-----|-----|-----|-----|-----|-----|------|------|
| Permissible compensation capacitance                 | $C_{\max}$ [ $\mu\text{F}$ ] | 470 | 470 | 470 | 47  | 80  | 100 | 220 | 330  | 470  |
|  |                              |     |     |     |     |     |     |     |      |      |
| Permissible compensation capacitance                 | $I_e$ [A]                    | 14  | 21  | 27  | 6   | 7,5 | 10  | 14  | 21   | 27   |
| Mercury blended lamps                                | $I_e$ [A]                    | 12  | 16  | 23  | 5   | 6,5 | 8,5 | 12  | 16   | 23   |
| Fluorescent lamps, conventional choke/starter        | $I_e$ [A]                    | 20  | 26  | 35  | 9   | 10  | 15  | 20  | 26   | 35   |
| Fluorescent lamps, twin-lamps, (series compensation) | $I_e$ [A]                    | 20  | 26  | 35  | 5,5 | 8   | 13  | 15  | 22,5 | 29   |
| Electronic ballasts                                  | $I_e$ [A]                    | 12  | 18  | 20  | 5   | 6,5 | 8,5 | 12  | 17,5 | 22,5 |
| High-pressure mercury-vapour lamps                   | $I_e$ [A]                    | 12  | 18  | 20  | 3,5 | 6   | 10  | 12  | 17,5 | 20   |
| Metal-halide lamps                                   | $I_e$ [A]                    | 12  | 18  | 20  | 3,5 | 6   | 10  | 12  | 17,5 | 20   |
| High-pressure sodium lamps                           | $I_e$ [A]                    | 12  | 18  | 20  | 3,5 | 6   | 10  | 12  | 17,5 | 20   |
| Low-pressure sodium lamps                            | $I_e$ [A]                    | 7,5 | 10  | 12  | 3   | 4   | 6   | 7,5 | 10   | 12   |

With all configurations with parallel compensation, the sum of the compensation capacitances must not exceed the value specified under the first value stated above.

| M40 | M50 | M65 | M80 | M95 | M115 | M150 | M185A | M225A | M250 | M300A | M400 | M500 |
|-----|-----|-----|-----|-----|------|------|-------|-------|------|-------|------|------|
| 470 | 500 | 500 | 550 | 620 | 830  | 970  | 2055  | 2300  | 2600 | 3000  | 3250 | 3500 |

| M40 | M50 | M65  | M80 | M95  | M115 | M150 | M185A | M225A | M250 | M300A | M400 | M500 |
|-----|-----|------|-----|------|------|------|-------|-------|------|-------|------|------|
| 470 | 500 | 500  | 550 | 620  | 830  | 970  | 2055  | 2300  | 2600 | 3000  | 3250 | 3500 |
|     |     |      |     |      |      |      |       |       |      |       |      |      |
| 33  | 42  | 55   | 67  | 79   | 95   | 125  | 153   | 187   | 208  | 249   | 332  | 415  |
| 30  | 38  | 45   | 65  | 67   | 80   | 110  | 123   | 150   | 167  | 200   | 266  | 332  |
| 41  | 45  | 55   | 95  | 100  | 125  | 145  | 207   | 237   | 263  | 300   | 375  | 525  |
| 36  | 47  | 59   | 71  | 95   | 100  | 138  | 186   | 213   | 236  | 270   | 338  | 473  |
| 28  | 35  | 45,5 | 56  | 66,5 | 80,5 | 105  | 130   | 158   | 175  | 210   | 280  | 350  |
| 25  | 30  | 36   | 55  | 60   | 80   | 95   | 138   | 158   | 175  | 200   | 250  | 350  |
| 25  | 30  | 36   | 55  | 60   | 80   | 95   | 138   | 158   | 175  | 200   | 250  | 350  |
| 25  | 30  | 36   | 55  | 60   | 80   | 95   | 138   | 158   | 175  | 200   | 250  | 350  |
| 15  | 22  | 25   | 35  | 40   | 50   | 70   | 100   | 111   | 123  | 140   | 175  | 245  |

**Addresses worldwide:**  
[www.moeller.net/address](http://www.moeller.net/address)

**E-Mail:** [info-int@eaton.com](mailto:info-int@eaton.com)  
**Internet:** [www.moeller.net](http://www.moeller.net)  
[www.eaton.com](http://www.eaton.com)

Publisher:  
Eaton Corporation  
Electrical Sector – EMEA

Eaton Industries GmbH  
Hein-Moeller-Str. 7-11  
D-53115 Bonn

© 2010 by Eaton Industries GmbH  
Subject to alterations  
VER2100-955GB ip 04/10