


# Technical data sheet · LÜTZE SUPERFLEX® N (C) PVC

## For medium to high requirements

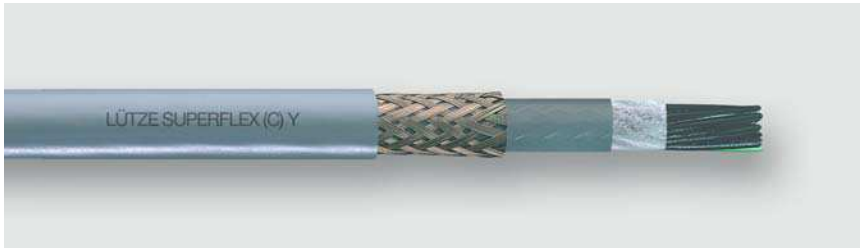

PVC control cables · C-track compatible · shielded

|                       |          |                     |
|-----------------------|----------|---------------------|
| <b>Identification</b> | Type     | SU N(C)PVC (7G0,75) |
|                       | Part-No. | 108001              |

### Use/Application/Characteristics

|                 |  |
|-----------------|--|
| Application     | <ul style="list-style-type: none"> <li>• Machine and device construction, transport and conveyor technology, HVAC technology</li> <li>• In dry and damp rooms</li> <li>• As a monitoring, measurement and control cable in continuously moving applications</li> <li>• For installation in energy chains with constant linear movement</li> <li>• Anywhere where electrical interference fields can influence the signal transmission</li> </ul> |
| Characteristics | <ul style="list-style-type: none"> <li>• Construction and material suitable for continuous movement application.</li> <li>• High active and passive interference resistance</li> <li>• PVC Flame-retardant, self-extinguishing</li> <li>• Resistant to most oils, greases, acids and alkalis (see tech. information)</li> <li>• Silicone free</li> <li>• RoHS-compliant</li> </ul>   |

### Construction

|                                    |                     |
|------------------------------------|---------------------|
| Description                        | SUPERFLEX N (C) PVC |
| Number of conductors/cross-section | (7G0.75)            |
| Jacket material                    | Special PVC         |
| Jacket color                       | grey RAL 7001       |
| Outer Ø                            | 8.6 mm              |

26.01.2017 – Subject to technical modification

Part-No. 108001

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
 www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

# Technical data sheet · LÜTZE SUPERFLEX<sup>®</sup> N (C) PVC

## For medium to high requirements

---

Weight 13.1 kg/100 m  
Cu-Index 7 kg/100 m

### Element 1

Element construction (7G0,75)  
Conductor CU-wire bare  
Conductor category DIN EN 60228, class 6  
Superfinely stranded DIN VDE 0295  
DIN EN 13602  
Conductor marking black  
with white number print  
green/yellow  
Conductor insulation Special PVC  
Stranding Conductors stranded layers  
layer pitch optimised  
Conductors twisted without mechanical stress  
Wrapping Non-woven material

### overall construction

Overall wrapping Non-woven material  
Inner jacket PVC  
Overall shield Braid shield  
Tinned copper wires  
optical cover approx. 85%  
Jacket characteristics Flame-retardant  
self-extinguishing  
Silicone-free  
Oil resistant  
grease-resistant  
acid-resistant.  
alkali-resistant

---

### Technical data

---

Rated voltage  $U_0/U$  300/500 V  
Test voltage type AC 3000 V  
Temperature range moving -15 °C ... +80 °C  
Temperature range fixed -30 °C ... +80 °C  
Minimum bending radius moving 12×D  
Minimum bending radius fixed 6×D  
Bending cycles  $\geq 1$  Mio  
Travel distance  $\leq 15$  m  
Speed 5 m/s

26.01.2017 – Subject to technical modification

Part-No. 108001

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

# Technical data sheet · LÜTZE SUPERFLEX® N (C) PVC

## For medium to high requirements

Acceleration 10 m/s<sup>2</sup>

### Element 1

Element construction (7G0,75)  
Insulation resistance at 20°C 20.0 MΩ×km

### Approvals/Standards

Conformity CE  
RoHS  
Burning behavior DIN EN 60332-2-2  
IEC 60332-2-2  
VDE 0482-332-2-2

### General

Note CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

### Symbols



26.01.2017 – Subject to technical modification

Part-No. 108001

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY