



---

<b>Identification</b>	Type	STGD4 - M 12
	Part-No.	490047

---

---

<b>Technical data</b>	
Nominal voltage	AC/DC 24 V
Nominal voltage range	250 V
Number of terminations	4
Coding	A

---

---

<b>General</b>	
Form	M12 × 1, male
Test voltage	2.95 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 8 \text{ m}\Omega$
Class of flammability according to UL 94	HB
Housing material	PA 66 black
Contact material	CuZn
Thread material	CuSn nickel plated
Cable diameter	2 × 2.1 – 3 mm or 4 – 5 mm
Storage temperature range	-40 °C–90 °C
Mechanical service life	>50 insertion cycles
Gauge	max. 0.75 mm <sup>2</sup>

---

03.10.2009 – Subject to technical modification

Part-No. 490047

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk




**Systematic Technology**

# Technical data sheet • Actuator sensor interface

Weight (kg/piece)	0.040
Termination	Screw terminal
PU	10


## Dimensions

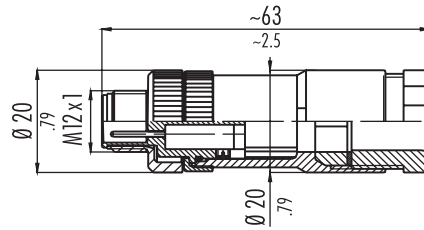

## PIN assignment



## Mounting diagram

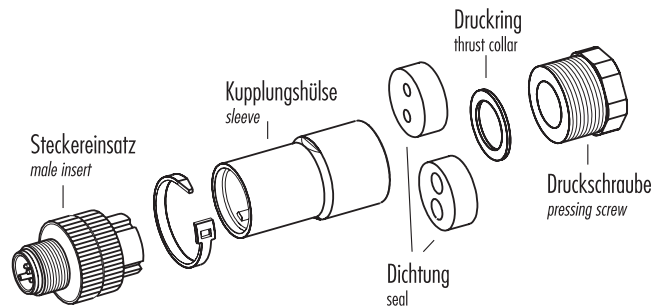

03.10.2009 – Subject to technical modification

Part-No. 490047

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk