



Identification	Type	KUGK-M8 3POL PCON
	Part-No.	490096
Technical data		
Nominal voltage	AC/DC 24 V	
Nominal voltage range	max. 30 V	
Rated current	4 A	
Number of terminations	3	
General		
Form	M8 × 1, female	
Test voltage	1.2 kV	
Pollution degree	3	
Insulation resistance	≥100 MΩ	
Contact resistance	≤ 3 mΩ	
Class of flammability according to UL 94	V0	
Protection class	IP 68, in screwed condition	
Housing material	PA 66 black	
Contact material	CuZn, gold-plated	
Thread material	CuSn nickel plated	
Gasket	NBR	
Cable diameter	3 – 5 mm	
Storage temperature range	-40 °C–90 °C	

03.10.2009 – Subject to technical modification

Part-No. 490096

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk


Technical data sheet • Actuator sensor interface

Temperature range connector	-25 °C – 90 °C
Mechanical service life	>100 insertion cycles
Weight (kg/piece)	0.140
Termination	0.14 – 0.34 mm ² ; AWG 22/26
PU	1

Dimensions

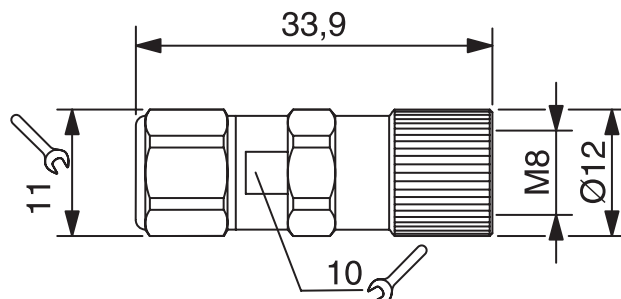

PIN assignment



03.10.2009 – Subject to technical modification

Part-No. 490096

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk