



<b>Identification</b>	Type	LCOS-CCI-1K-1P16-DC24V
	Part-No.	773000.1121
<b>Description</b>	Electronic load monitoring up to DC 16 A 1-channel version, single pole switching, DC 2 A – DC 16 A, characteristic can be set Collective fault message: single/90% message, Remote Control input	
<b>Input</b>	Type of function 1-channel 1 pin switching Technology Powerbus and terminal strip Rated voltage $U_N$ DC 24 V Operation voltage range DC 20.4–28.8 V Input voltage range – 30 V Supply current DC 32 A via LCOS Powerbus Reverse voltage protection internal electronics Participants 64 units Bus length Max. 25 m Transfer rate 1 MBaud	
<b>Control input (Set / Reset)</b>	Signal level DC 24 V acc. to EN 61131 OFF Pulse with falling edge >100 ms, <800 ms	

25.08.2017 – Subject to technical modification

Part-No. 773000.1121

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223  
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

## Technical data sheet - Load monitoring

---

ON	Pulse with falling edge > 1 s
Connection type control side	X2: 12-pin multi-point plug, RM 3.5
Isolation voltage	AC 1.5 kV, 1 min.

---

### Output

Switching element	MosFet
Output current	max. DC 16 A
Voltage drop	<170 mV (10 A)
Status display output	<b>Output 1:</b> LED green: no error, LED green flashing: 90 % utilisation <b>Output 2:</b> LED red flashing: triggered, LED red: unit off
Switch-on capacity	>10000 µF
Current range	2 A – 16 A (can be set via switch in 2 A steps)
Characteristic	fast (1), medium (2), slow 1 (3), slow 2 (4), slow 3 (5), adjustable via switch

---

### Communication internal

Communication	internal data bus
BUS physics	CANopen acc. to ISO 11898-1, 11898-2
Participants	64 units
BUS topology	Line
Transfer rate	1 MBaud
Bus length	Max. 25 m
Galvanic isolation	500 V

---

### General

Operation temperature range	-25 °C ... +55 °C
Storage temperature range	-40 °C ... +70 °C
Dimensions (w x h x d)	22.5 x 110.0 x 102.0 mm (including function carrier, without plug-in terminals on the side)
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)
Colour of the housing	RAL 7012 basalt grey
Mounting	plug-in on LCOS function carrier 22.5 mm (Accessories) DIN rail mounting (EN 60715)
MTBF	690000 h @ 40 °C, 100 operations button, 30 revolutions coding switch
Protection class	IP20
Installation position	vertical
Connection type load side	X1: 8-pin multi-point plug, RM 5.08
Connection type control side	X2: 12-pin multi-point plug, RM 3.5
Weight	0.200 kg/piece

25.08.2017 – Subject to technical modification

Part-No. 773000.1121

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

## Technical data sheet · Load monitoring

Approvals	cULus GL in preparation
Standards	EN 60950-1 EN 61131-1, 2 EN 61000 EN 60947-4-1 EN 55022
PU	1 piece

### Dimensions

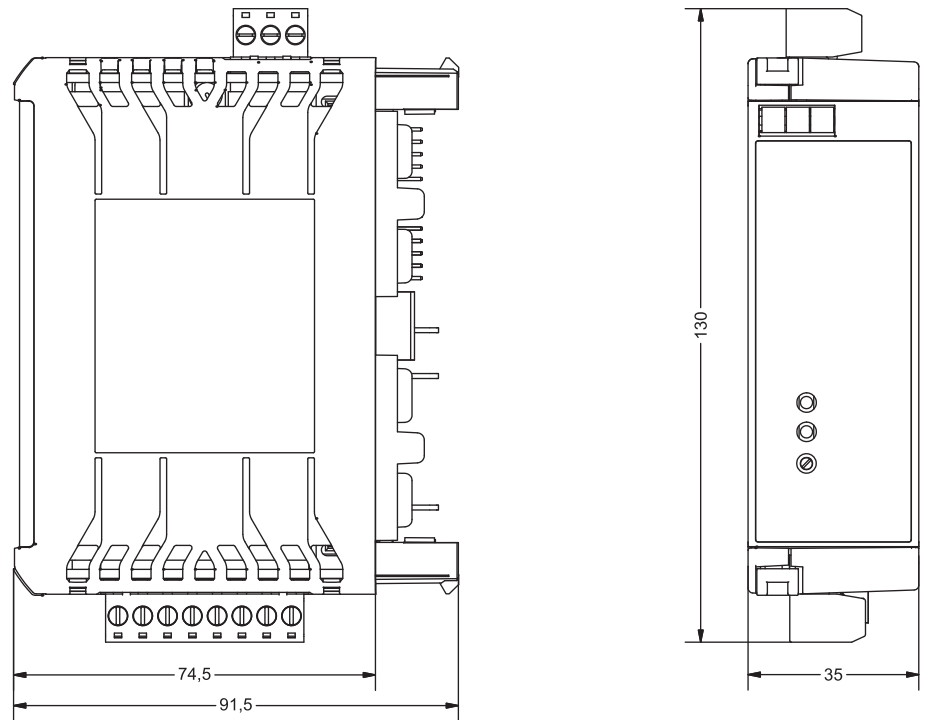

25.08.2017 – Subject to technical modification

Part-No. 773000.1121

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223  
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2  
www.lutze.com · sales.gb@lutze.co.uk

# Leerwert Standard- sprache

25.08.2017 – Subject to technical modification

Part-No. 773000.1121

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223

www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2

www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY