

Technical data sheet · LÜTZE SILFLEX® M (C) TPE POWER TRAY CABLE

Flexible Motor Cable for Allen-Bradley and other systems



TPE Motor cables · shielded · static

| | | |
|-----------------------|----------|--|
| Identification | Type | SI M(C)TPE SE(4GAWG16)UL 0,6/1KV OR |
| | Part-No. | A3161604 |

Use/Application/Characteristics

| | |
|-------------|---|
| Application | <ul style="list-style-type: none"> • Shielded multi-conductor cable for motor and servo motor applications • Cable design for harsh industrial environments and operating conditions with high noise levels • Improved insulation design with additional conductor stress relief layer as a power distortion suppressant • Compliant with NFPA 79 for machine tool wiring • TC-ER for use with cable trays without conduit, which can reduce material and labor costs • UL Type 1000V Flexible Motor Supply Cable for Motor/Power applications • Dry, damp and wet locations |
|-------------|---|

29.01.2017 – Subject to technical modification

Part-No. A3161604

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SILFLEX® M (C) TPE POWER TRAY CABLE

Flexible Motor Cable for Allen-Bradley and other systems

| | |
|-----------------|---|
| Characteristics | <ul style="list-style-type: none"> • Conductor stress relief layer prevents premature cable failure and reduces corona effects, increasing reliability and lifetime • Flexible design with Nylon for crush impact resistance per UL 1277 and easy installation • Very round cable with small diameter • Specially formulated TPE jacket for superior oil resistance per Oil Res I and II • Resistant to many mineral and vegetable based cutting oils • Non-wicking fillers • Sunlight resistant • Direct burial • UL Type TC-Exposed Run • Talc free and Silicone free |
|-----------------|---|

Construction

| | |
|------------------------------------|-------------------|
| Description | SILFLEX M (C) TPE |
| Number of conductors/cross-section | (4×AWG16) |
| Jacket material | TPE |
| Jacket color | orange RAL 2003 |
| Outer Ø | 10.5 mm |
| Outer Ø | 0.41 inches |
| Weight | 124 Lbs/Mft |
| Cu-Index | 50 Lbs/Mft |

Element 1

| | |
|------------------------|--|
| Element construction | AWG16/4C |
| Conductor construction | AWG 16 (26/30) |
| Conductor | AWG conductor CU-wire bare |
| Conductor category | feindrähtig |
| Conductor marking | brown black blue green/yellow |
| Conductor insulation | PVC/Nylon |

overall construction

| | |
|------------------------|--|
| Overall shield | Braid shield Tinned copper wires optical cover approx. 85% |
| Jacket characteristics | Oil resistant mineral oil-resistant bio-oil-resistant Silicone-free |

29.01.2017 – Subject to technical modification

Part-No. A3161604

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SILFLEX[®]M (C) TPE POWER TRAY CABLE Flexible Motor Cable for Allen-Bradley and other systems

Technical data

| | |
|------------------------------|---|
| Rated voltage | 600 V UL TC 600 V UL MTW 1000 V WTTC 1000 V Flexible Motor Supply 600 V UL AWM 105 °C |
| Temperature range fixed | -40 °C ... +90 °C |
| Minimum bending radius fixed | 6×D |

Element 1

| | |
|----------------------|----------|
| Element construction | AWG16/4C |
|----------------------|----------|


Approvals/Standards

| | |
|----------------------------|--|
| Approvals | cULus TC-ER UL MTW WTTC Class 1 Div. 2 per NEC Art. 336, 392, 501 cUL TC CIC FT4 UL 1277 |
| Conformity | cURus CE RoHS REACH |
| Oil resistant according to | Oil Res I Oil Res II |

General

| | |
|------|--|
| Note | CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU |
|------|--|

Symbols

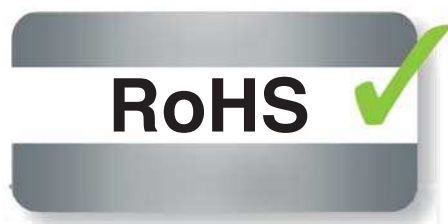

29.01.2017 – Subject to technical modification

Part-No. A3161604

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SILFLEX[®]M (C) TPE POWER TRAY CABLE Flexible Motor Cable for Allen-Bradley and other systems



29.01.2017 – Subject to technical modification

Part-No. A3161604

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk