

# Technical data sheet · LUTZE Single Conductor Hook Up Wire with UL/CE/MTW and HAR Approvals



Flexible Single Conductor Hook Up Wire · Multi-Norm

<b>Identification</b>	Type	EA HAR-UL 1G25 GN/GE
	Part-No.	A60400

<b>Use/Application/Characteristics</b>		
Application	<ul style="list-style-type: none"> <li>• Multi rated single-conductor cable for wiring of cabinets and use in electrical and electronic equipment</li> <li>• Specially suited for machines exported to Europe (HAR) and North America (UL MTW + CSA TEW)</li> <li>• MTW rating as required <b>per NFPA 79</b> for machine tool wiring</li> </ul>	
Characteristics	<ul style="list-style-type: none"> <li>• Fine stranding class 5, per VDE 2095</li> <li>• Very flexible for easy installation</li> <li>• Free from silicone and other varnish damaging substances</li> <li>• Conditionally resistant to oils, solvents, acids and bases</li> <li>• MTW rated</li> <li>• RoHS compliant</li> </ul>	

<b>Construction</b>	
Description	SINGLE CONDUCTOR HOOK UP WIRE MULTI-NORM
Number of conductors/cross-section	1×25
Outer Ø	10 mm
Outer Ø	0.394 inches
Weight	27.4 kg/100 m
Weight	180 Lbs/Mft
Cu-Index	24 kg/100 m

24.03.2017 – Subject to technical modification

Part-No. A60400

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

# Technical data sheet - LUTZE Single Conductor Hook Up Wire with UL/CE/MTW and HAR Approvals

Cu-Index 161 Lbs/Mft

## Element 1

Element construction AWG4/1C  
Conductor CU-wire tin-plated  
Conductor category Finely stranded DIN VDE 0295  
IEC 60228, Class 5  
Conductor marking green/yellow  
Conductor insulation PVC  
Conductor insulation standard UL 1581  
Class 43 heat and humidity resistant

## Technical data

Rated voltage  $U_0/U$  450/750 V  
Rated voltage UL 600 V  
Test voltage type AC 3000 V  
Temperature range moving -5 °C ... +105 °C  
Temperature range fixed -40 °C ... +105 °C  
Minimum bending radius fixed 5×D

## Element 1

Element construction AWG4/1C

## Approvals/Standards

Approvals cULus  
cURus  
UL 1063 MTW Listed  
TEW  
HAR  
HAR: HD 21.3 S3  
UL style AWM 1015  
Conformity CE  
RoHS  
REACH  
Burning behavior according to UL VW-1  
IEC 60332-1

## General

Note CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

## Symbols

24.03.2017 – Subject to technical modification

Part-No. A60400

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.


Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

# Technical data sheet · LUTZE Single Conductor Hook Up Wire with UL/CE/MTW and HAR Approvals

---

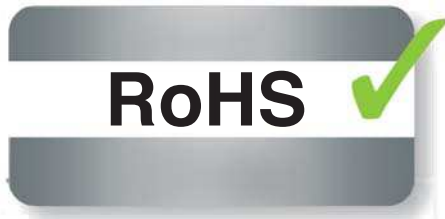

24.03.2017 – Subject to technical modification

Part-No. A60400

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk