Level Plus®

Magnetostrictive Liquid Level Transmitters with Temposonics® Technology





The Level Plus® SoCLEAN® liquid level transmitter satisfies the demand for an accurate and robust liquid level sensor with unsurpassed flexibility to meet many process application conditions. The SoCLEAN® transmitter provides 3-in-1 measurement using one process opening for product level, interface level, and temperature measurements. Once the transmitter is installed and calibrated there is no requirement for scheduled maintenance or recalibration. *Set it and forget it!*

MORE FEATURES

- Intrinsically Safe (Ex ia)
- Sanitary finish Ra 0.64 μm (25 μin)
- Electropolished finish Ra 0.38 μm (15 μin)

TYPICAL APPLICATIONS

- Process control
- Batching
- Bioreactor

MARKETS

- Food and Beverage
- Pharmaceutical
- Cosmetics

TECHNICAL DATA

Output Analog (4...20mA), HART®, Modbus RTU, DDA Output signal / Protocol Product level, interface level and temperature Measured value **Measurement parameters** Resolution ±1 mm (±0.039 in.) 0.001 % F.S. or 0.381 mm (0.015 in.) 1 Repeatability (any direction) **Operating conditions** Operating temperature Electronics: -40 ...71 °C (-40...160 °F) Sensing element: -40...125 °C (-40...257 °F) 2 Temperature element: -40...105 °C (-40...221 °F) **Design / Material** Wetted parts Stainless steel (AISI 316L) 3 Non-wetted parts Stainless steel (AISI 316L), epoxy coated aluminum Order length Rigid pipe: 305...7620 mm (12...300 in.) 4,5 Vessel pressure Rigid pipe: 138 bar (2000 psi) **Electrical connection** Operating voltage 10.5...28 VDC

1 Whichever is greater


Contact factory for specific temperature ranges
Contact factory for alternative materials
Contact factory for oldernative materials
Contact factory for longer lengths
Order length equals the measurement range plus the inactive zone

Document Part Number:

551863 Revision A (EN) 10/2016

Image reference:

TECHNICAL DRAWING

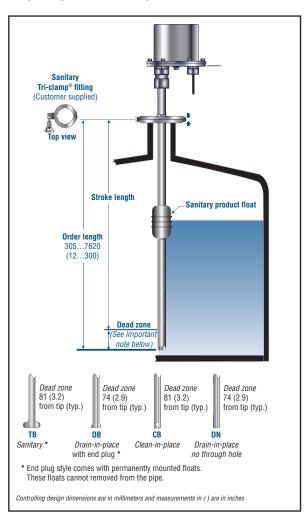

Front page: @ Alex Staroseltsev - Fotolia.com

USA MTS Systems Corporation Sensors Division

3001 Sheldon Drive Cary, N.C. 27513, USA Tel. +1 919 677-0100 Fax +1 919 677-0200 info.us@mtssensors.com www.mtssensors.com

JAPAN MTS Sensors Technology Corp.

737 Aihara-machi, Machida-shi Tokyo 194-0211, Japan Tel. +81 42 775-3838 Fax +81 42 775-5512 info.jp@mtssensors.com www.mtssensors.com

FRANCE MTS Systems SAS

Zone EUROPARC Bâtiment EXA 16 16/18, rue Eugène Dupuis 94046 Creteil, France Tel. +33 1 58 4390-28 Fax +33 1 58 4390-03 info.fr@mtssensors.com www.mtssensors.com

GERMANY

MTS Sensor Technologie GmbH & Co. KG

Auf dem Schüffel 9 58513 Lüdenscheid, Germany Tel. +49 2351 9587-0 Fax + 49 2351 56491 info.de@mtssensors.com www.mtssensors.com

CHINA

MTS Sensors

Room 504, Huajing Commercial Center, No. 188, North Qinzhou Road 200233 Shanghai, China Tel. +86 21 6485 5800 Fax +86 21 6495 6329 info.cn@mtssensors.com www.mtssensors.com

ITALY MTS Systems Srl

Sensor Division Via Camillo Golgi, 5/7 25064 Gussago (BS), Italy Tel. +39 030 988 3819 Fax +39 030 982 3359 info.it@mtssensors.com www.mtssensors.com

MTS, Temposonics and Level Plus are registered trademarks of MTS Systems Corporation in the United States; MTS SENSORS and the MTS SENSORS logo are trademarks of MTS Systems Corporation within the United States. These trademarks may be protected in other countries. All other trademarks are the property of their respective owners. Copyright © 2016 MTS Systems Corporation. No license of any intellectual property rights is granted. MTS reserves the right to change the information within this document, change product designs, or withdraw products from availability for purchase without notice. Typographic and graphics errors or omissions are unintentional and subject to correction. Visit www.mtssensors.com for the latest product information.













