

A/D-CONVERTER 8-BIT - INPUT 4 ... 20MA


IN: 4 ... 20mA - OUT: 8-bit


A/D converter
8 Bit
4...20 mA

Input and output galvanically separated

[Link to Product](#)

Illustration

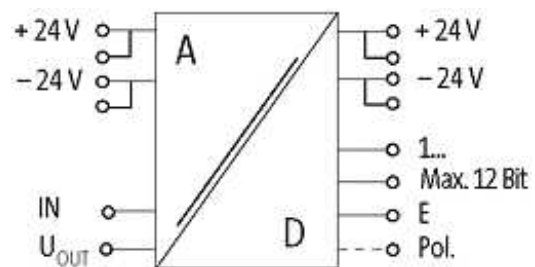

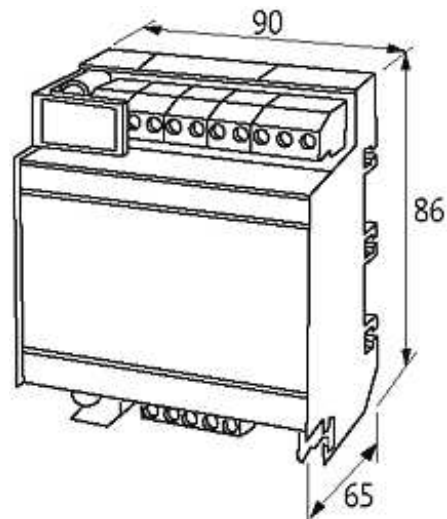

Product may differ from Image

Input

Input current	type dependent
Input signal	type dependent

General data

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+85 °C
Dimensions H × W × D	62×86×90 mm

Output

Output current	100 mA/Bit, with LED
----------------	----------------------

Description

Functional description

On modules with voltage inputs, it is possible to set the maximum input signal using a trimmer. The output "POL" indicates the polarity. A voltage output U_{out} 15 V/20 mA (minimal ripple) can be used as a power supply for the analog output device. The hold

Commercial data

country of origin	CZ
customs tariff number	85437090
minimum order quantity	1