


AMMDS 10-44/1 OPTO-COUPLER MODULE




IN: 35 VDC - OUT: 35 VDC / 0.2 A

Transistor 0.2 A

24 V DC

with minus plug link

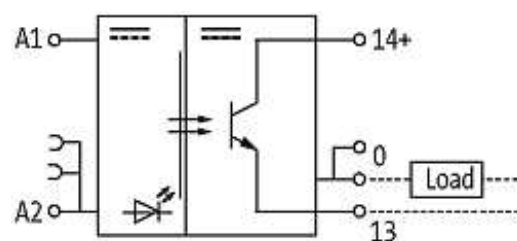Double terminals on the output side
for rapid switching[Link to Product](#)**Illustration**

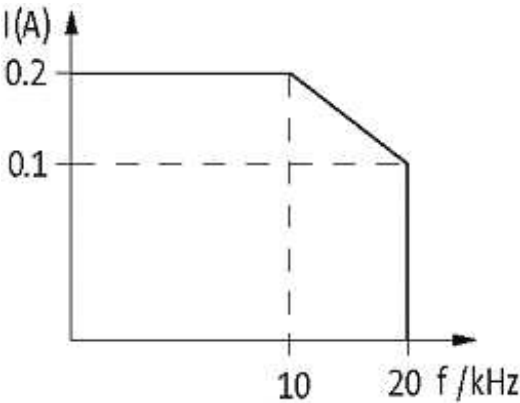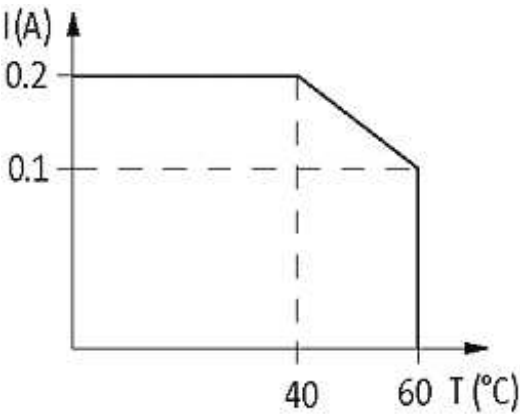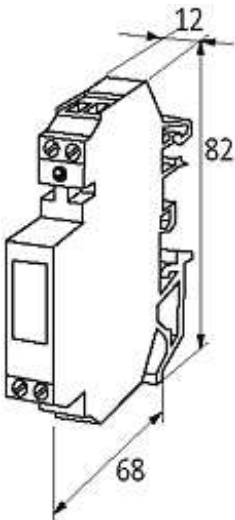

Product may differ from Image

Input	
Voltage range ON	10...35 V DC
Voltage range OFF	0...5 V DC
Input current	10 mA
LED display	LED (red)
Plug link (supplied)	Art.-Nr. 90960
General data	

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H × W × D	68×82×12 mm

Output

Switching voltage	5...35 V DC
Switching current per output	1 mA...0.2 A
Saturation voltage (across output)	max. 0.5 V DC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	20/14 µs
Switching frequency	max. 20 kHz/200 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1