MURR ELEKTRONIK
stay connected

# AMMDU OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 53 VDC / 1 A - 1 C/O contact

Transistor 1 A
24 V DC
with minus plug link

electr. NO/NC contact

## Link to Product

### Illustration

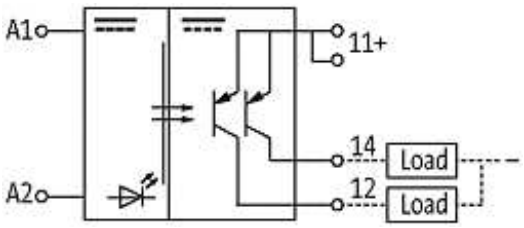


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

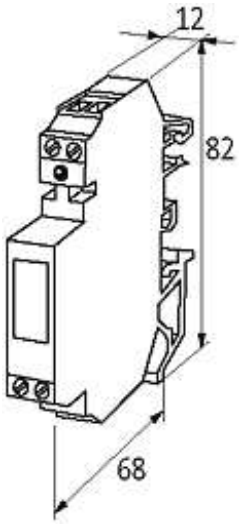


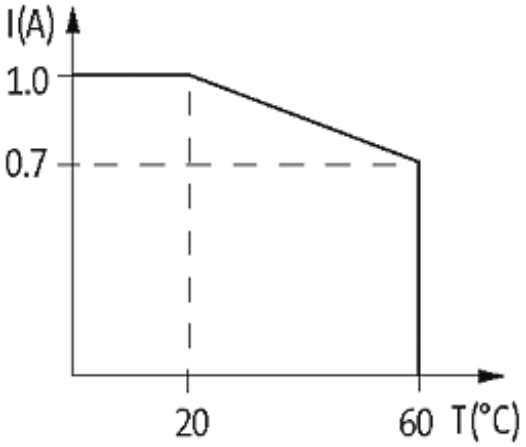


Product may differ from Image

| | |
|---|---|
| **Input** | |
| Voltage range ON | 10...53 V DC |
| Voltage range OFF | 0...6 V DC |
| Input current | 10 mA |
| LED display | LED (red) |
| **General data** | |
| Test isolation voltage | 2.5 kV |
| Mounting method | DIN-rail mountable TH35 or G32 (EN 60715) |
| Housing | Black plastic, flame retardant |
| Temperature range | -20...+60 °C |
| Dimensions H × W × D | 12×82×68 mm |
| **Output** | |
| Switching voltage | 4.5...53 V DC |
| Switching current per output | 1 mA...1 A |
| Saturation voltage (across output) | max. 0.5 V DC |
| Leakage current (output is open) | max. 0.3 mA |
| Switching time ON/OFF | 25/75 µs |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

| | |
|---|---|
| Switching frequency | max. 1 kHz/10 Hz (resist./ind.) |
| **Commercial data** | |
| country of origin | CZ |
| customs tariff number | 85414090 |
| minimum order quantity | 1 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16