
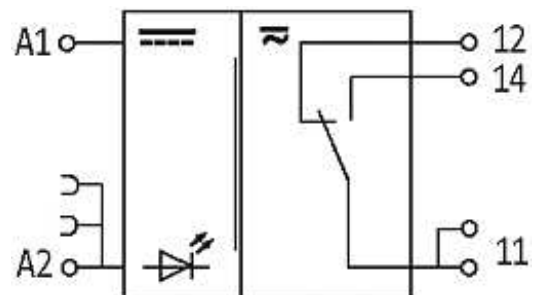


RMMDUE 11/230 V AC INPUT RELAY

IN: 230 VAC/DC - OUT: 250 VAC/DC / 5 A

1 relay; 1 NO/NC contact
5 A
230 V AC
with minus plug link

[Link to Product](#)**Illustration**

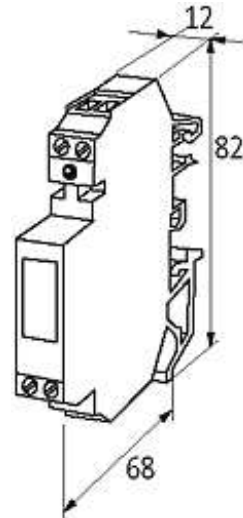

Product may differ from Image

Input

| | |
|------------------------------|---------------------------------------|
| Connection voltage - current | 230 VAC/DC (195...253 VAC/DC) - 4.5mA |
| LED display | LED (yellow) |

Utilization category

| | |
|-------|--|
| AC-1 | 5 A (24/110/230 V AC) |
| AC-15 | 4 A (24/110/230 V AC) |
| DC-13 | 2 A (24 V DC); 0.25 A (110 V DC); 0.1 A (230 V DC) |

General data

| | |
|------------------------|---|
| Mech./ elect. life | 100.000.000 switching cycles/load dependent |
| Test isolation voltage | 4 kV |
| Mounting method | DIN-rail mountable TH35 or G32 (EN 60715) |
| Temperature range | -20...+60 °C |
| Dimensions H × W × D | 82×12×68 mm |

Output

| | |
|--------------------------------------|----------------------|
| Switching voltage | max. 250 V AC/DC |
| Switching current per output | max. 5 A |
| Min. load current | 1 mA |
| Power rating (voltage dependent) | max. 1500 VA/180 W |
| Switching frequency | max. 15 Hz |
| Contact material | Ag Ni 0.15 hv; Ag hv |
| Energize/release/contact bounce time | 10/10/1 ms |

Commercial data

| | |
|------------------------|----------|
| country of origin | CZ |
| customs tariff number | 85364900 |
| minimum order quantity | 1 |