

## MIRO TR 5VDC SK OPTO-COUPLER MODULE

IN: 5,5 VDC - OUT: 48 VDC / 2 A


Transistor 2 A


5 V DC

Screw terminals

[Link to Product](#)

### Illustration

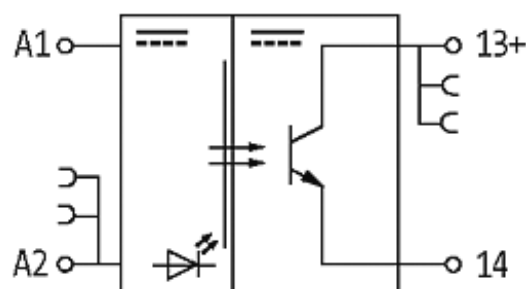

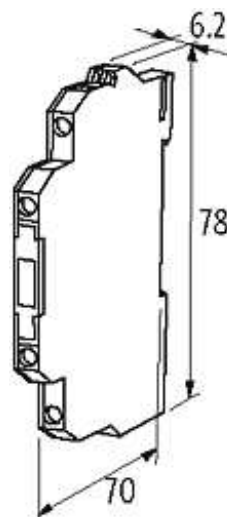

Product may differ from Image

### Approvals



### Input

|                   |              |
|-------------------|--------------|
| Voltage range ON  | 4...5.5 V DC |
| Voltage range OFF | 0...2 V DC   |
| Control current   | 6 mA         |
| LED display       | LED (yellow) |

### General data

|                        |                                |
|------------------------|--------------------------------|
| Test isolation voltage | 2.5 kV                         |
| Mounting method        | DIN-rail mountable (EN 60715)  |
| Housing                | Black plastic, flame retardant |
| Temperature range      | -20...+60 °C                   |
| Dimensions H × W × D   | 78×6.2×70 mm                   |

### Output

|                                    |                             |
|------------------------------------|-----------------------------|
| Switching voltage                  | 5...48 V DC                 |
| Switching current per output       | 1 mA...2 A                  |
| Saturation voltage (across output) | max. 0.3 V DC               |
| Leakage current (output is open)   | max. 10 µA                  |
| Switching time ON/OFF              | 1/5 ms                      |
| Switching frequency                | max. 10/1 Hz (resist./ind.) |

### Commercial data

|                        |          |
|------------------------|----------|
| country of origin      | CZ       |
| customs tariff number  | 85414090 |
| minimum order quantity | 1        |