


MIRO TR 90-250VAC OPTO-COUPLER MODULE



IN: 250 VAC/DC - OUT: 48 VDC / 0,5 A

Transistor 0.5 A
230 V AC
Screw terminals

[Link to Product](#)

Illustration

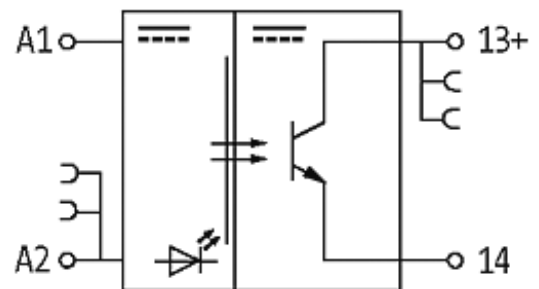

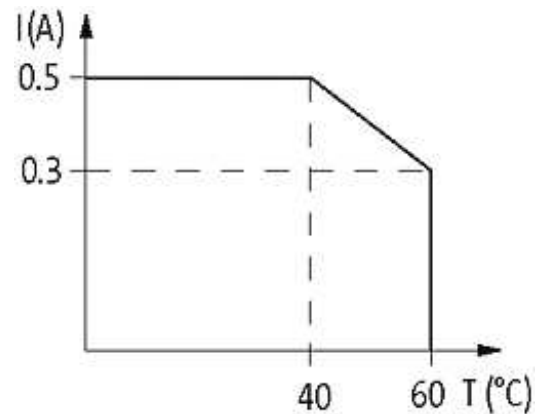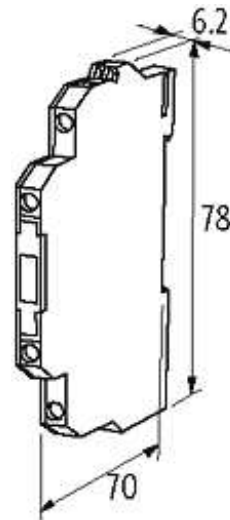

Product may differ from Image

Approvals



Input

| | |
|-------------------|---------------|
| Voltage range ON | 90...250 V AC |
| Voltage range OFF | 0...40 V AC |
| Control current | 7 mA |
| LED display | LED (yellow) |

General data

| | |
|------------------------|--------------------------------|
| Test isolation voltage | 3.75 kV |
| Mounting method | DIN-rail mountable (EN 60715) |
| Housing | Black plastic, flame retardant |
| Temperature range | -20...+60 °C |
| Dimensions H x W x D | 78x6.2x70 mm |

Output

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

| | |
|------------------------------------|-------------------------------|
| Switching voltage | 5...48 V DC |
| Switching current per output | 0.1 mA...0.5 A |
| Saturation voltage (across output) | max. 1.2 V DC |
| Leakage current (output is open) | max. 0.3 mA |
| Switching time ON/OFF | 100/700 μ s |
| Switching frequency | max. 500/30 Hz (resist./ind.) |

Commercial data

| | |
|------------------------|----------|
| country of origin | CZ |
| customs tariff number | 85414090 |
| minimum order quantity | 1 |