


## MIRO TR 24VDC SK OPTO-COUPLER MODULE



IN: 53 VDC - OUT: 48 VDC / 0,5 A - 1 C/O contact

Transistor 0.5 A  
24 V DC  
electr. NO/NC contact  
Screw terminals

### [Link to Product](#)

#### Illustration

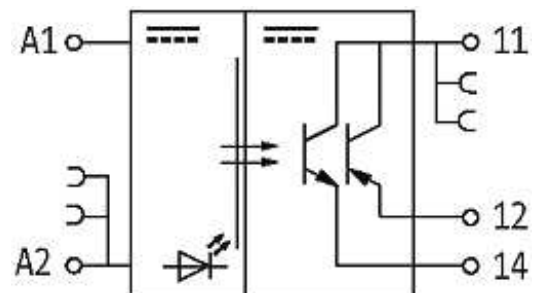

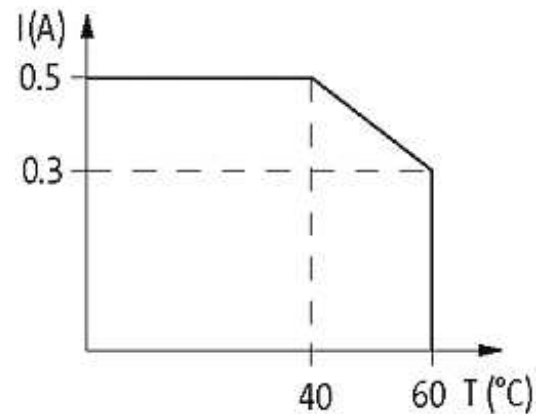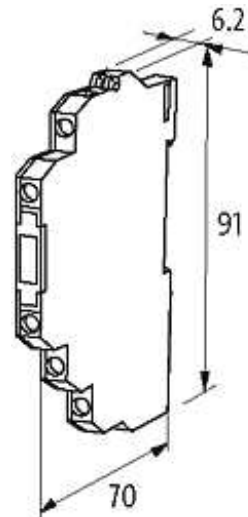

Product may differ from Image

### Approvals



### Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	6 mA
LED display	LED (yellow)

### General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H x W x D	91x6.2x70 mm

### Output

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Switching voltage	5...48 V DC
Switching current per output	0.1 mA...0.5 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.1 mA
Switching frequency	max. 10 Hz
Switching time ON/OFF	40/150 $\mu$ s

**Commercial data**

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1