

MIRO GSM ADI6 DO4R 24VDC

IN: 12 ... 48VDC

ADI6 DO4R (Relay) 24 V DC

Freely configurable


INPUT: 24 V DC

4 NO/NC contacts

Screw terminals

[Link to Product](#)

Illustration

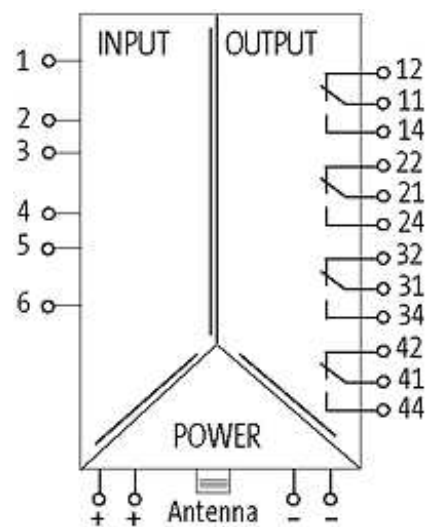



Product may differ from Image

Approvals



Input

Connection voltage - current	12...48 V DC - 15 mA
Resolution (analog)	12 Bit
Input range (analog)	0...10 V DC
Input resistor (analog)	142 kOhm
Conversion time (analog)	max. 1 s

General data

Mech./ elect. life	30.000.000 switching cycles/load dependent
Protection	IP20
Connection	Screw terminals: max. 2.5 mm ² (AWG 14)
Mounting method	DIN-rail mountable (EN 60715) or screw fixing
Temperature range	-25...+55 °C (storage temperature -40...+85 °C)
Dimensions H x W x D	80x90x59.5 mm

Output

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 10 A
Total current	max. 20 A
Contact material	Ag Ni 90/10

Commercial data

country of origin	CH
customs tariff number	85176200
minimum order quantity	1