


MIRO GSM DI6 DO4R 230VAC

IN: 110 ... 240VAC


DI6 DO4R - (Relay) 230 V AC
 INPUT: 230 V AC
 4 NO/NC contacts
 Screw terminals

[Link to Product](#)

Illustration

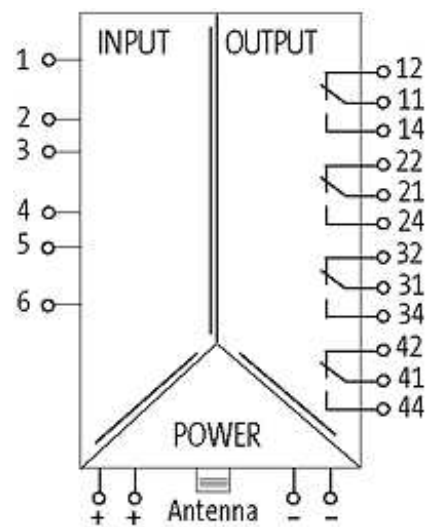

stay connected

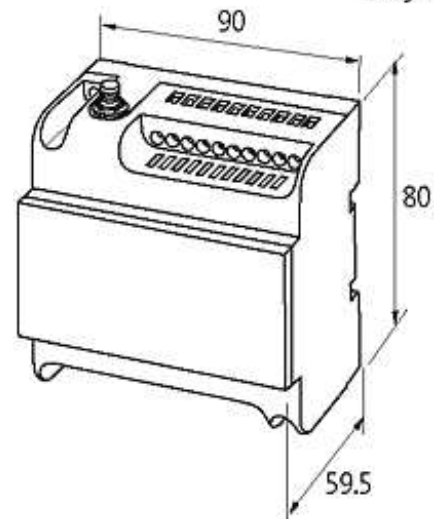

Product may differ from Image

Approvals



Input

Connection voltage - current 110...240 V AC - 10 mA

General data

Mech./ elect. life	30.000.000 switching cycles/load dependent
Protection	IP20
Connection	Screw terminals: max. 2.5 mm ² (AWG 14)
Mounting method	DIN-rail mountable (EN 60715) or screw fixing
Temperature range	-25...+55 °C (storage temperature -40...+85 °C)
Dimensions H × W × D	80×90×59.5 mm

Output

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 10 A
Total current	max. 20 A
Contact material	Ag Ni 90/10

Commercial data

country of origin	CH
customs tariff number	85176200
minimum order quantity	1